


The information in this document is the exclusive PROPRIETARY property of LEVITON MANUFACTURING COMPANY, INC. It is disclosed with the understanding that acceptance or review by the recipient constitutes an undertaking by the recipient; (1) to hold this information in strict confidence, and (2) not to disclose, duplicate, copy, or use the information, in whole or in part, for any purpose other than that for which disclosed. This document is loaned subject to return upon demand.


Copyright ©2002 Leviton Mfg. Co. Inc. Unpublished. All Rights Reserved.

DRAWING INTERPRETATION PER ASME Y14.5 1994
THIRD ANGLE PROJECTION


D8000 LCD Slider Station Installation Instructions

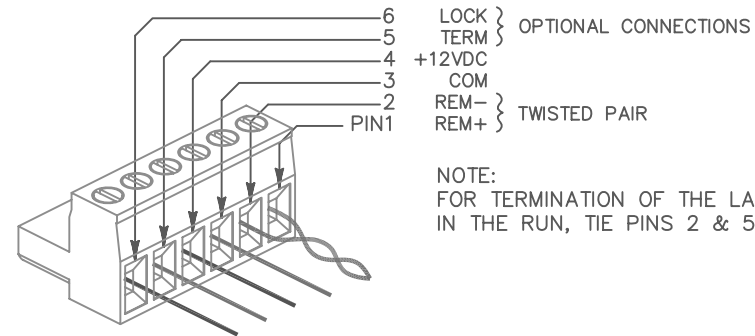

STEP 1 LOCATE FEMALE CONNECTOR PROVIDED AND TERMINATE WIRES AS SHOWN.

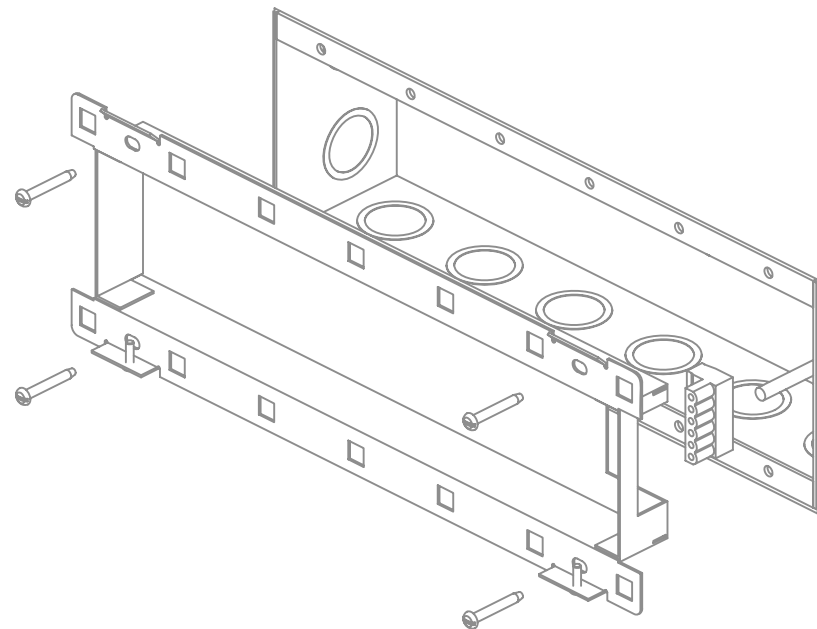


STEP 2 INSERT THE WIRED CONNECTOR THROUGH THE HOLE IN THE BACK OF THE SHROUD. ATTACH THE SHROUD TO THE 4 GANG BOX AS SHOWN, USING (4) 6-32 X 1" SCREWS PROVIDED.

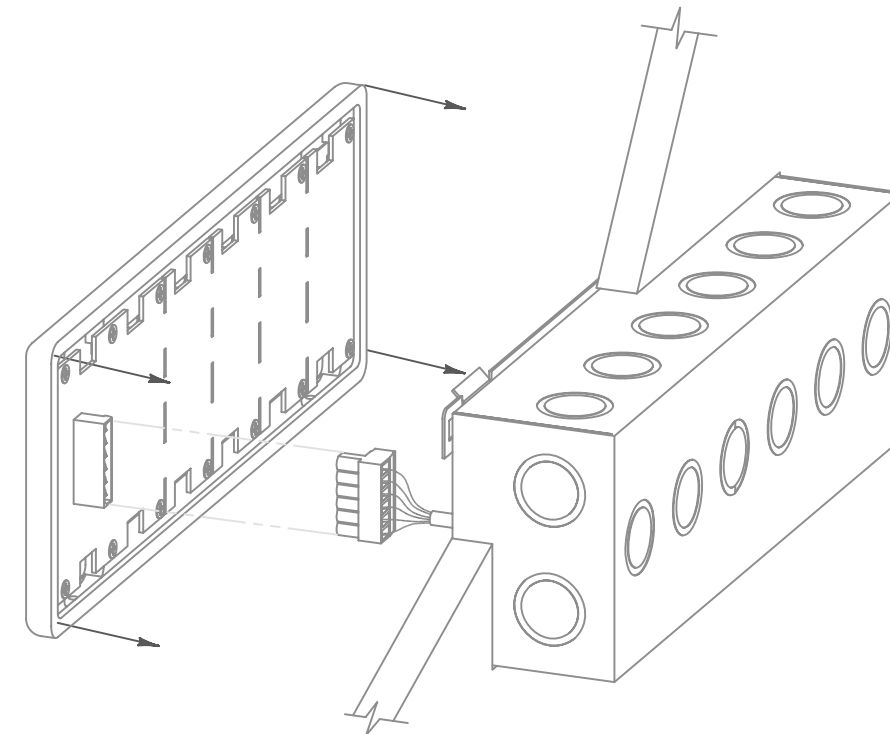

STEP 3 PLUG CONNECTOR ONTO BACK OF SLIDER ASSEMBLY AS SHOWN. PUSH THE WIRE INTO THE WIRE WAY IN BETWEEN THE SHROUD AND THE BACK OF THE WALL BOX. ENSURE THE CORRECT LUMA-NET ID DIP-SWITCH SETTING PRIOR TO INSTALLATION.

STEP 4 HOOK THE TOP OF THE SLIDER ASSEMBLY WALL PLATE OVER THE ANGLED TABS ON THE SHROUD AND ROTATE THE ASSEMBLY BACK INTO PLACE.

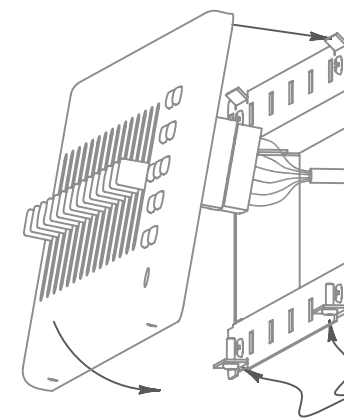

RETAINING SCREW ACCESS HOLES

STEP 5 USE A #1 PHILLIPS SCREWDRIVER WITH A 0.120 O.D. TO SEAT THE 2 RETAINING SCREWS INTO THE SLOTS ON THE INSIDE OF THE WALL PLATE BY TURNING THEM COUNTER CLOCKWISE. SCREWS SHOULD BE TURNED OUT ONLY UNTIL SNUG.

RETAINING SCREWS SHOULD BE TURNED ALL THE WAY IN (CLOCK-WISE) BEFORE WALL PLATE IS SET INTO PLACE.

