

# GU10 Wall Light

Installation instructions for JC17050 & JC17051

## Warnings & Cautions

- To avoid electric shock, serious injury or property damage, isolate power before installing, removing or installing the product.
- It is recommended that luminaires are installed by a qualified electrician and the installation complies with the local current wiring regulations.
- It may be necessary to upgrade your MCBs to allow for increased inrush current.
- These products are designed for connection to a 220-240V~ 50/60Hz.
- Any broken or damaged parts should be replaced as soon as possible. JCC will not accept responsibility for claims arising from sub-standard installations; which will void the warranty.
- Do not install in areas that are near to continual running water or prone to flooding.
- Do not use halogen lamps in these products.
- This product is for indoor and outdoor use.

## INSTALLATION

ENGLISH

### Specification: 2 x GU10 cap 7W LED max (lamp not included)

Available finishes: Anthracite(ANTH) only

#### 220-240V~ 50/60Hz Class I

Fig 3. Mains Input


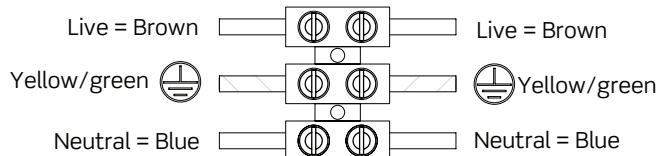


Fig 2

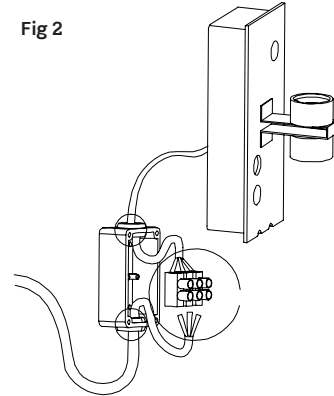

## Installation procedure

1. Remove screws from top and bottom of fitting to remove cover (fig 1). Determine mounting location using the main body as a template, drill holes and insert plastic plugs.
2. Feed cable through grommet, ensuring water tight prior to fixing in desired location (fig 2) and connect mains input (fig 3).
3. Secure main body to wall (fig 4).
4. Place lamps into lampholders (fig 5).
5. Refit cover and secure.
6. Reconnect mains power supply and test for operation.

Fig 1

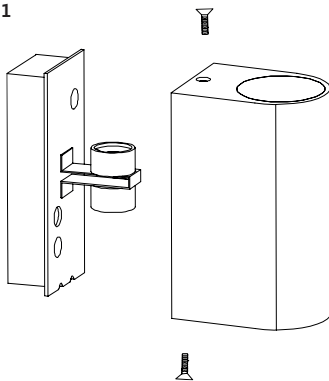


Fig 4





Fig 5




### General maintenance requirements for exterior products:


JCC recommends that all exterior products, especially those with stainless steel components are cleaned with warm water and dried with a chamois leather or absorbent dry cloth. Weathering, environmental pollution and bird droppings should be cleaned off with a non-abrasive cleaner suitable for the material type. To preserve the finish of the product, clean every two to three months. After installation is complete, then bi-annually, grease or lubricate removable fixings, to help ensure maintenance is trouble free.

## Profile & Dimensions


**JC17050**

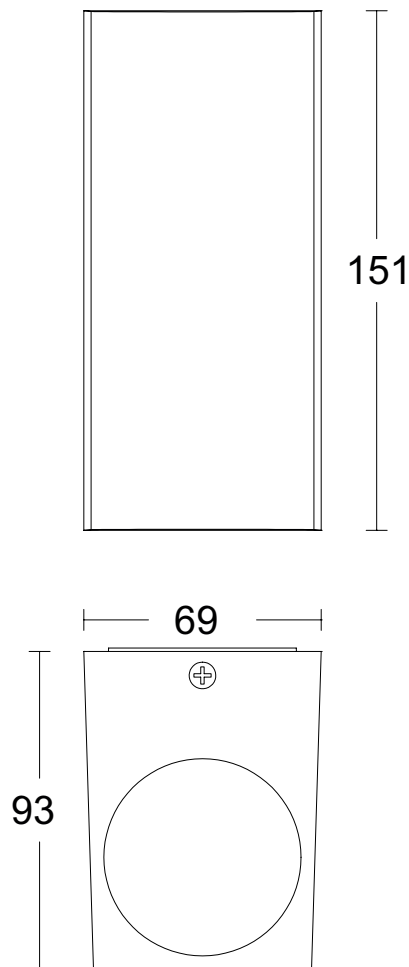

**JC17051**

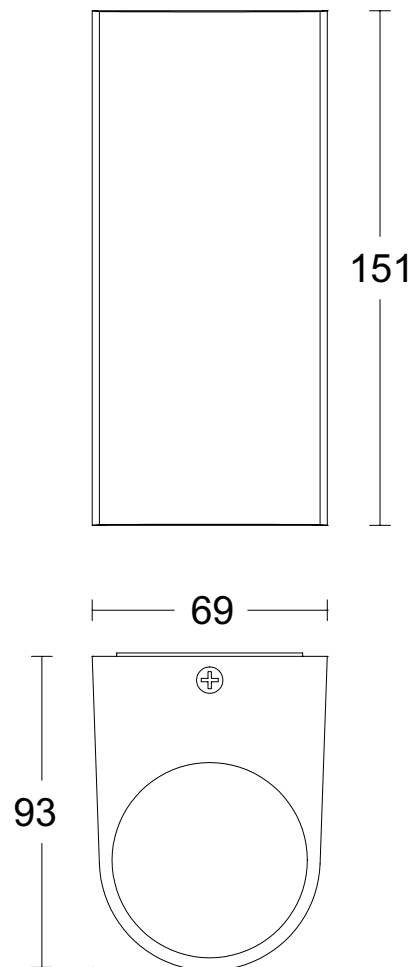

All dimensions in millimetres



You can help protect the environment. Please remember to respect the local regulations: hand in the non-working electrical equipment to an appropriate waste disposal centre. The packaging material is recyclable. Dispose of the packaging in an environmentally friendly manner and make it available for the recyclable material collection service.

### Important warranty information

This product is supported by a 2-year standard warranty which will extend to 3 years if registered within the first year of purchase. Please register at [jcc.co.uk/warranty](http://jcc.co.uk/warranty) - Terms and conditions apply.

The installer will be asked to provide the following information, which is detailed on a label attached to the luminaire's chassis: Product Code/Date Code.