



Applications Cookbook

Smart Ceiling Mount Room Controllers (SRC) and Smart Ceiling Mount Sensors (CMS)

Version 2.0

FOR REFERENCE ONLY

TABLE OF CONTENTS

PAGE	DESCRIPTION
4	SRC Classroom With Plug Load Control
5	SRC Classroom With Expanded FOV
6	SRC Classroom With Demand Response
7	SRC Common Area
8	SRC Demand Response Terminations
9	Dual Relay CMS with Wireless Companion Switch
10	Dual Relay CMS with Wireless Companion Switch and Power Pack for Low Voltage HVAC Dry Contact Closure
11	CMS Large Space, Single Zone, Auto ON/OFF Only
12	CMS Large Space, Two Zone, Auto ON/OFF Only
13	CMS with Wireless Companion Switch
14	CMS with Power Pack For Low Voltage HVAC Dry Contact Closure
15	Restroom with Fan Control
16	Small Office, Single Zone
17	Small Office, Two Zone
18	Stairwell Bi-Level Control
19	Stairwell Landing, Single Zone
20	Stairwell Landing, Two Zone
21	SRC Dimming, Daylight Harvesting, Two Zone
22	SRC Dimming, Daylight Harvesting, Expanded Field of View, Four Zone With Independent Manual Lighting Control
23	SRC 4-Wire Dimmed Load, 0-10V
24	SRC Auto ON/OFF, Manual ON/OFF
25	CMS Switched Load, UL924 Bypass
26	CMS Dimmed Load, UL924 Bypass


SRC COOKBOOK NOTES

1. Refer to manufacturer's data sheets and installation instructions prior to installation
2. Line feed 120/230/277 VAC, 60 Hz
3. Ground not shown, ground devices per applicable national and local codes are best practices
4. For emergency power situations, illustrations assume transfer switch by others upstream of shown devices
5. Line voltage load not to exceed contact rating per device specifications
6. Power packs receiving separate feeds for switched loads and self power must have both feeds on the same phase
7. All low voltage devices consume current. Device power budget is estimated for these details—additional power sources may be required. See product literature for power specifications
8. Maximum run length for analog wiring is 1000' @ #18 AWG
9. Sensors wired in parallel will cause line voltage relay closure when occupancy is detected by any unit
10. Devices in series requiring contact closure from a single device (clock input, demand response, emergency, etc.) must follow these wiring conventions:
 - First device in sequence provides the +V to the triggering relay
 - Signal from closure attached to all devices in sequence input
 - Com from first device in sequence attached to com on all devices in sequence
11. Applications requiring multiple power packs/power supplies at the same VDC:
 - +V must never be tied together between power packs/power supplies
 - Com/DCC must be tied together to all power packs/power supplies and all powered devices
12. Ultrasonic ceiling mount sensors should be located a minimum of six (6) feet from HVAC supply/return vents
13. Ceiling sensors mounted over doorways should be placed one (1) foot inside the threshold
14. Trough-mounted and pendant-mounted indirect lighting sources affect the operation of locally mounted sensors. Contractor is responsible for adjusting sensor locations to allow for proper operation
15. Contractor is responsible for proper sensitivity and time delay settings for non-adaptive products, following the manufacturer's recommended placement, and field verification of circuits with respect to power pack placement
16. Contractor is responsible for coordinating the operational options of sensors and power packs with the specific work requirements
 - Work relevant energy code requirements affect circuits to be controlled and their control characteristics
 - One controlled relay is required for reach controlled circuit
 - Refer to power pack data sheet for power output and installation guide for maximum number of sensors connected to a control device
 - Multiple control circuits may be controlled by a sensor/multiple sensors. Refer to the product installation manuals for interconnection details
17. Up to 100 Mark VII style ballasts may be controlled per daylighting zone by IRC
18. All relays shown in de-energized state
19. Individually cap off unused leads
20. One-line parenthesis use:
 - (X) Function
 - [#] Terminal
21. N-Way Switching
 - Wireless N-Way Switching/Dimming
 - One device is connected for all control, remaining are connected for device power only. Switching and dimming control are coordinated wirelessly between participating devices
 - High Voltage 3-Way Switching
 - Per industry standards: (2) high voltage travellers plus (1) high voltage line/load per switch. Switch equal to Leviton 1223-W (Toggle) or 5623-2 (Decora) unless otherwise noted
 - Low Voltage Analog Maintained 3-Way Switching
 - (2) #18 AWG source plus (1) #18 AWG signal per switch. Switch equal to Leviton 1223-W (Toggle) or 5623-2 (Decora) unless otherwise noted
 - Low Voltage Analog Momentary N-Way Switching
 - (1) #18 AWG Source plus (1) #18 AWG signal per switch. Quantity of low voltage momentary switches as required. Terminated in parallel
 - Digital Stations
 - Digital stations are software programmable and should be wired according to their digital communications
22. Plug Load Control - Commercial receptacle P/Ns:
 - Standard Duplex
 - Split control (1 outlet) CR015-1PX, CR020-1PX
 - Full control (2 outlets) CR015-2PX, CR020-2PX
 - Decora
 - Split control (1 outlet) 16252-1PX, 16352-1PX
 - Full control (2 outlets) 16252-2PX, 16352-2PX
23. Control Receptacle:
 - Quantity per applicable codes
 - Termination shown split receptacle. Termination per applicable codes
 - Receptacle markings per applicable energy codes


ABBREVIATIONS:

LC	LumaCAN
LV	Low voltage
HV	High voltage switch (maintained)
LVM	Low voltage switch (momentary) Equal to Leviton 1081 (toggle) OR Leviton 56081 (Decora)
LVT	Low voltage switch (maintained) Equal to Leviton 12021-2 (toggle) or Leviton 56021-2 (Decora)
LV2	IRC low voltage switch
UON	Unless otherwise noted
BLK	Black
WHT	White
BLU	Blue
YEL	Yellow
ORG	Orange
VIO	Violet
BRN	Brown

SYMBOLS:

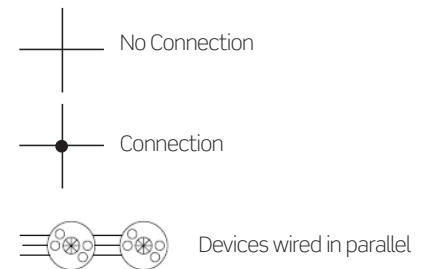


SRC CLASSROOM WITH PLUG LOAD CONTROL

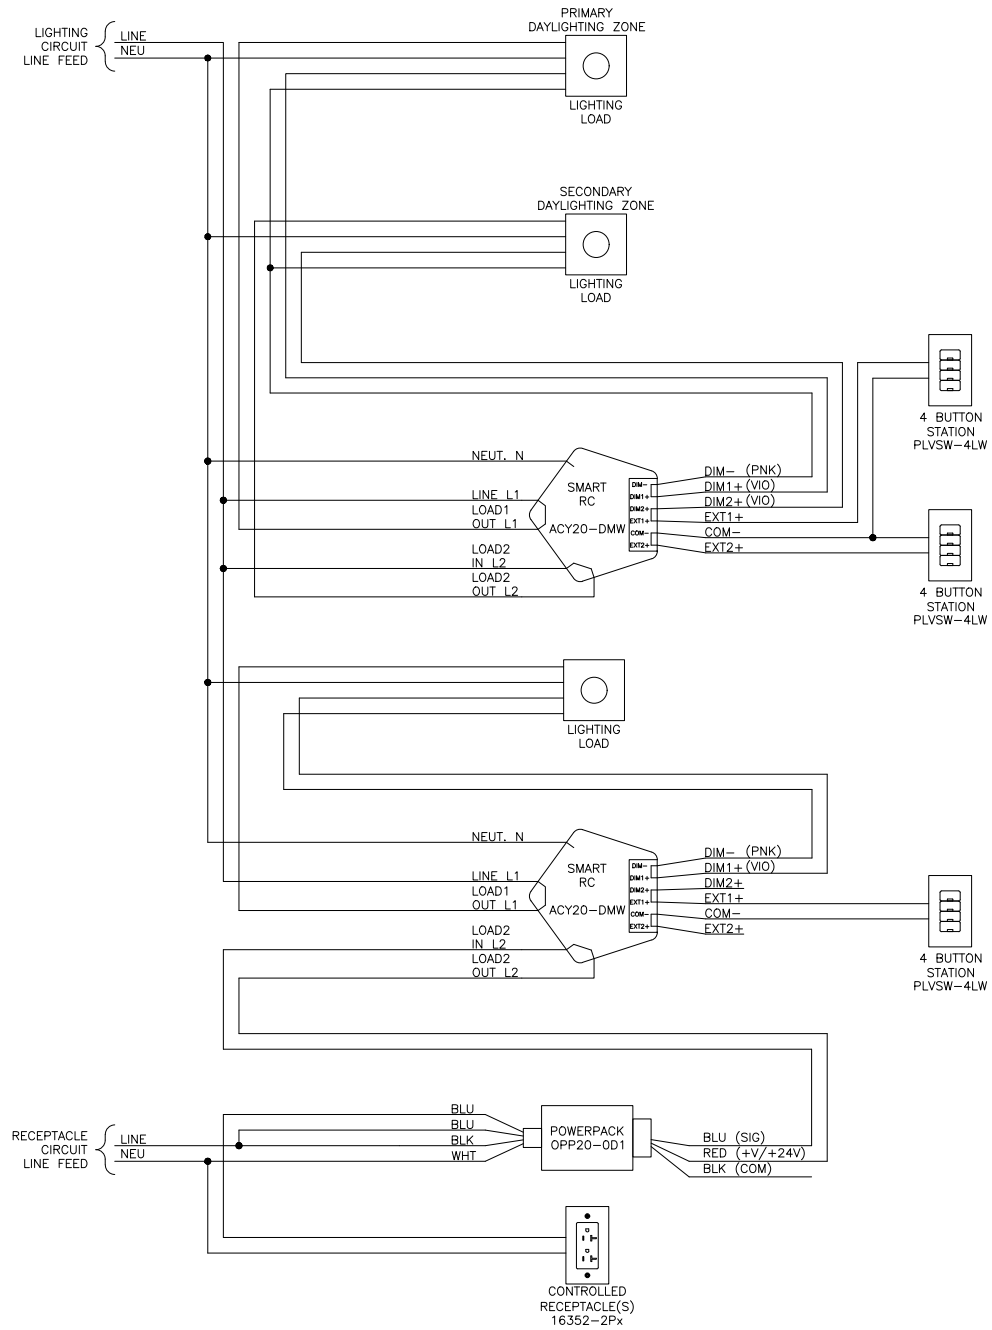


NOTES:
 1. 0-10V PINK WIRE MAY BE GRAY.

SRC CLASSROOM WITH EXPANDED FIELD-OF-VIEW (FOV)

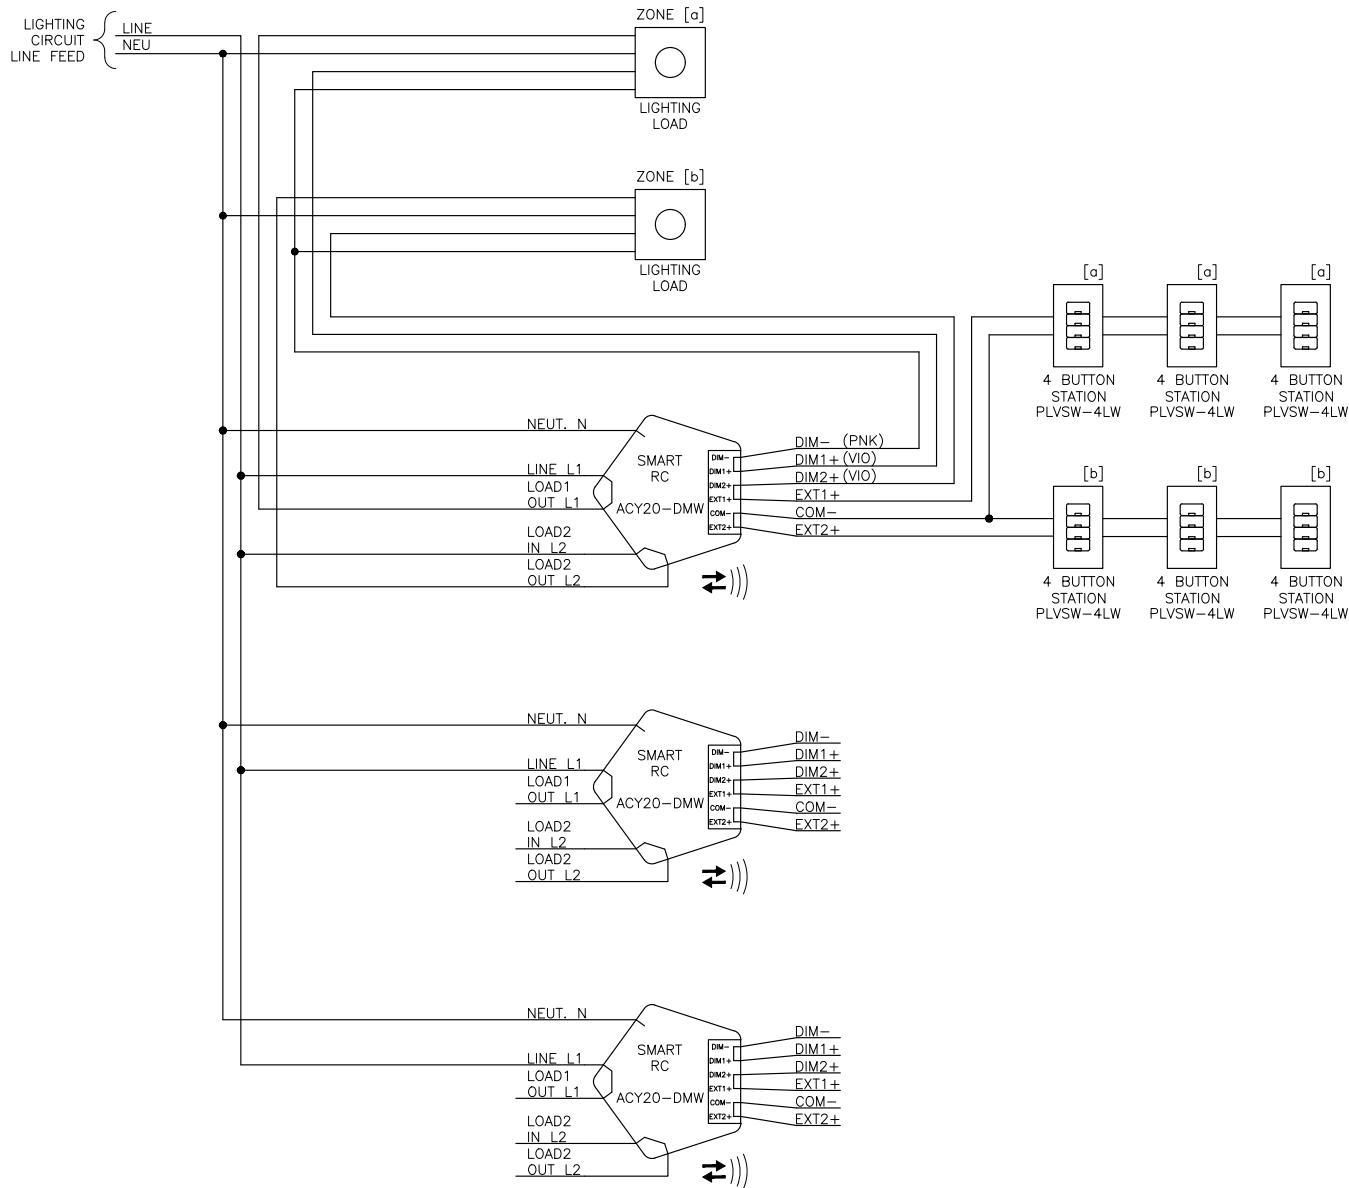


- NOTES:
1. 0-10V PINK WIRE MAY BE GRAY.
 2. INDIVIDUALLY CAP UNUSED LEADS.
 3. ONE ACY20-DMW IS CONNECTED AS THE MAIN DEVICE TO THE LIGHTING LOADS. ADDITIONAL ACY20-DMW DEVICES ARE SOFTWARE CONFIGURED AS REMOTE DEVICES TO THE MAIN DEVICE.
 4. WIRED ANALOG STATIONS ARE CONNECTED TO THE MAIN.
 - ANALOG STATIONS CONNECTED TO EXT1+ ARE FOR CONTROLLING THE FIRST ZONE, EXT2+ TO THE SECOND ZONE.
 5. REFER TO THE LEVITON PRODUCT LITERATURE AND CONFIGURATION SOFTWARE FOR ADDITIONAL INFORMATION.

SRC CLASSROOM WITH DEMAND RESPONSE

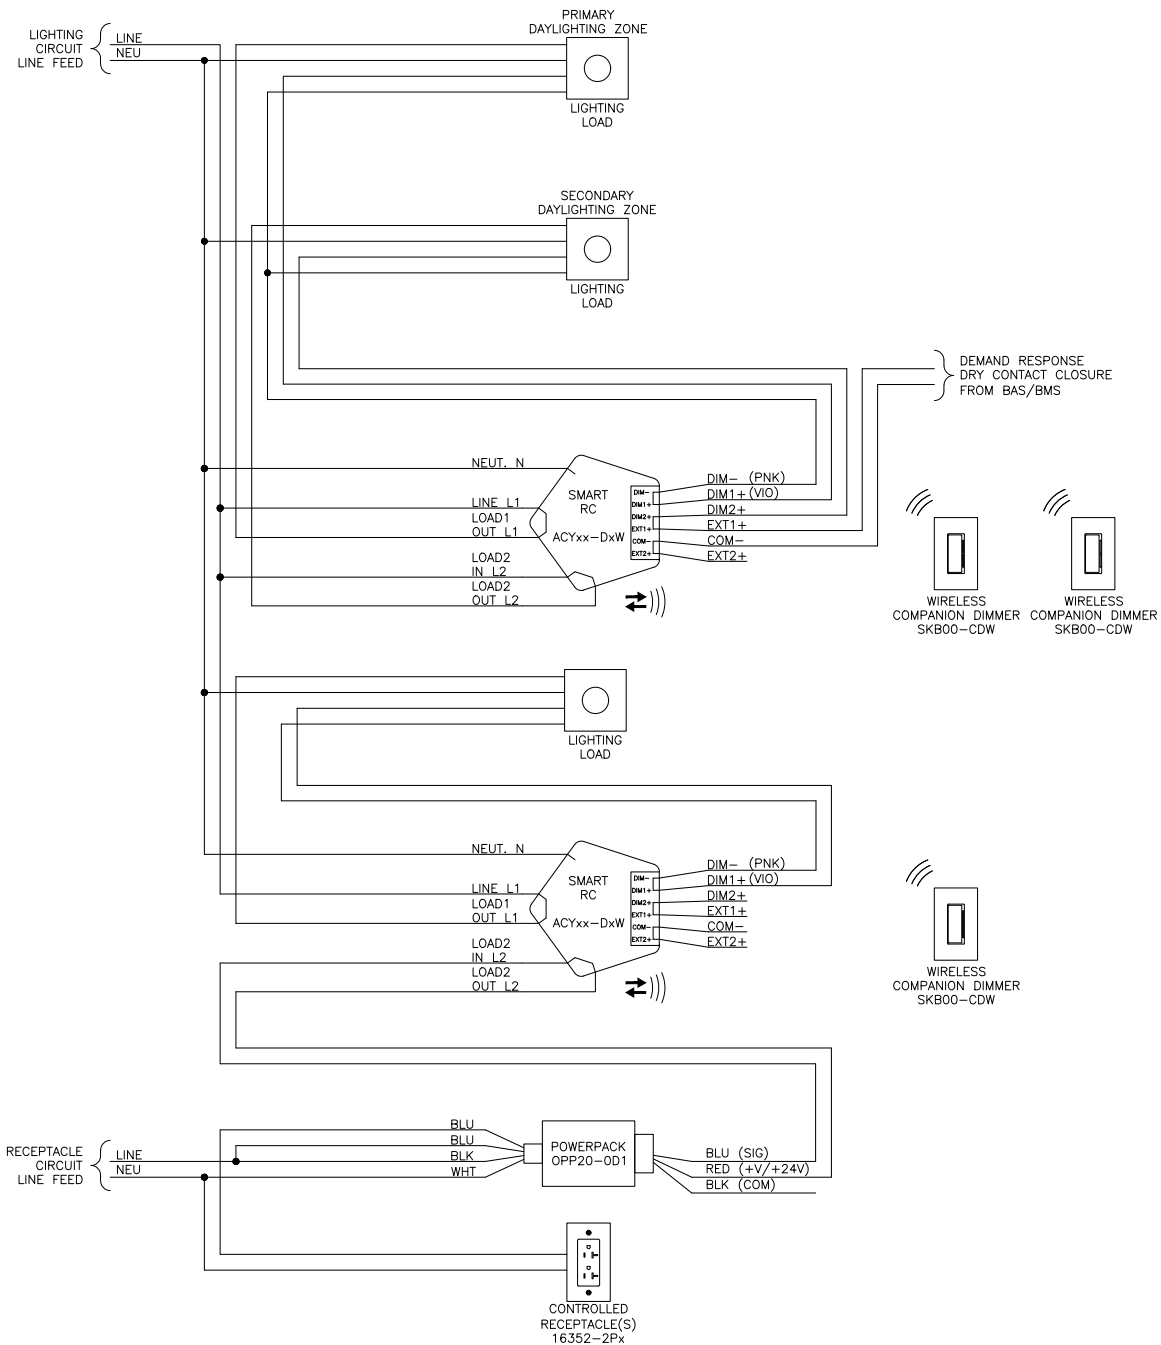

NOTES:
1. 0-10V PINK WIRE MAY BE GRAY.



SRC COMMON AREA

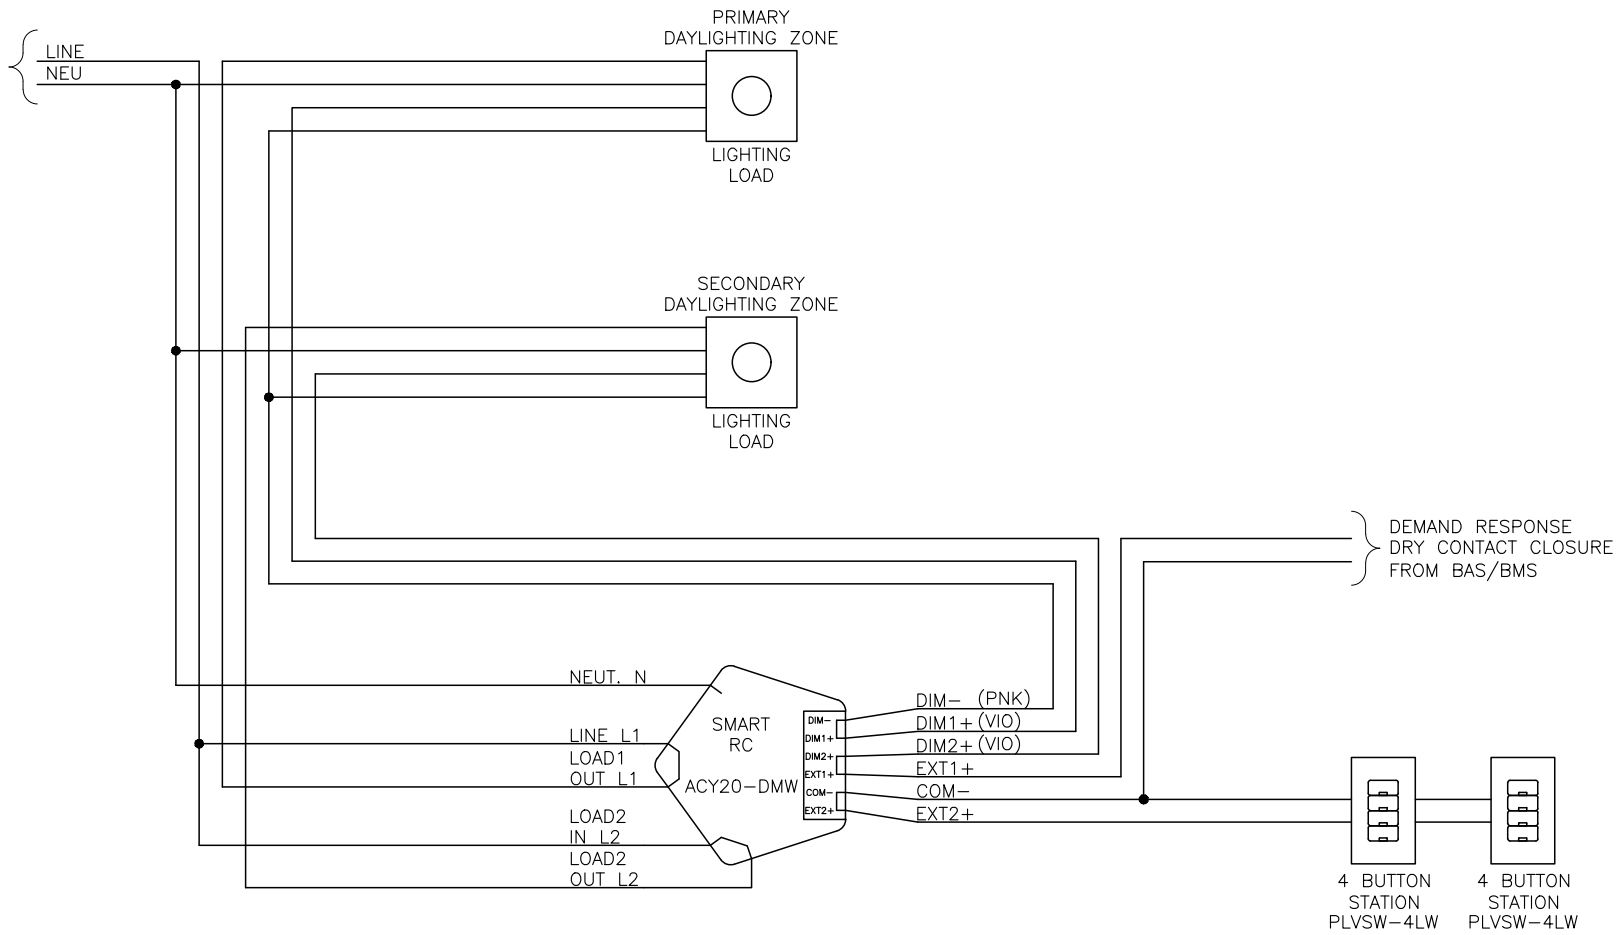

NOTES:

1. 0-10V PINK WIRE MAY BE GRAY.

SRC DEMAND RESPONSE TERMINATIONS

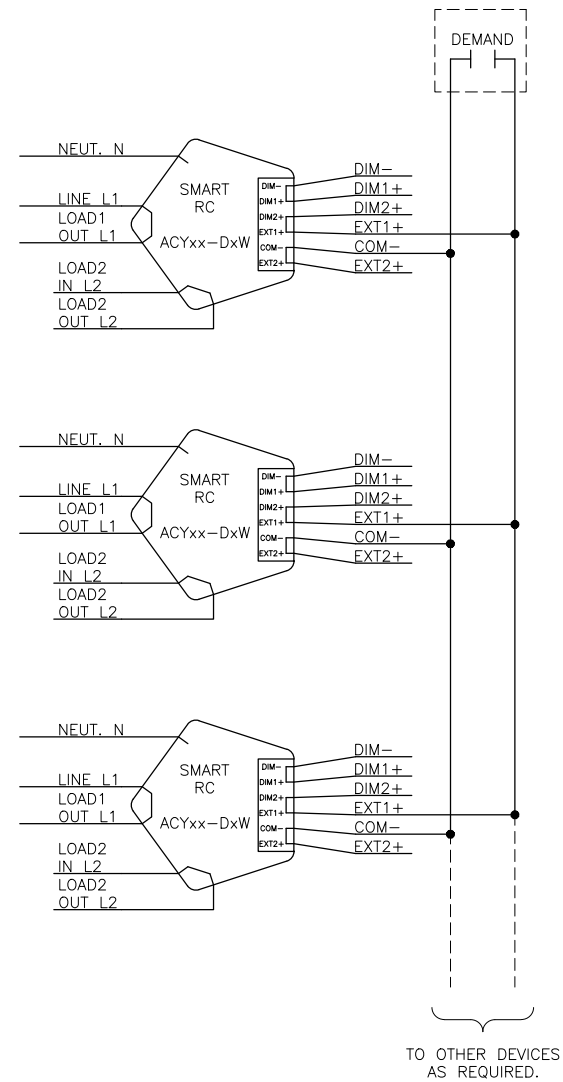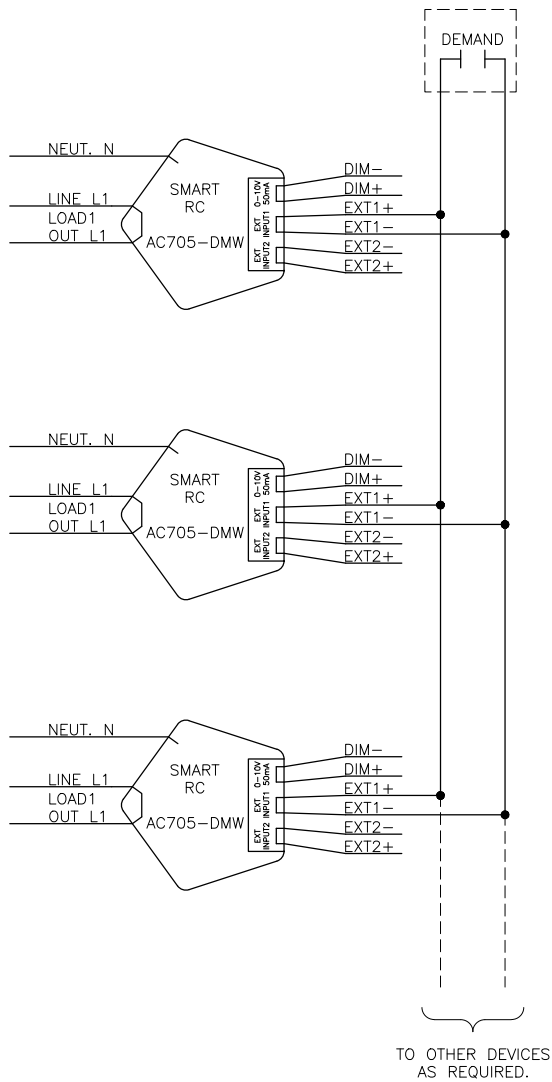


1. DEMAND RESPONSE

- TRIGGERED BY DRY CONTACT CLOSURE.
- DEMAND RESPONSE PER ENERGY CODE OPERATIONAL REQUIREMENT.
- UP TO 5 SRC/CMS DEVICES CAN BE WIRELESSLY NETWORKED TOGETHER SO THAT ONLY ONE DEVICE NEEDS TO BE CONNECTED TO DEMAND RESPONSE CONNECTION. THIS CAN BE REPEATED AS NECESSARY.


2. OTHER CONNECTIONS NOT SHOWN FOR CLARITY. REFER TO PRODUCT INSTALLATION MANUALS FOR MORE INFORMATION.

3. ADDITIONAL DEVICES (AS REQUIRED) WIRE IN PARALLEL.

DUAL RELAY CMS WITH WIRELESS COMPANION SWITCH

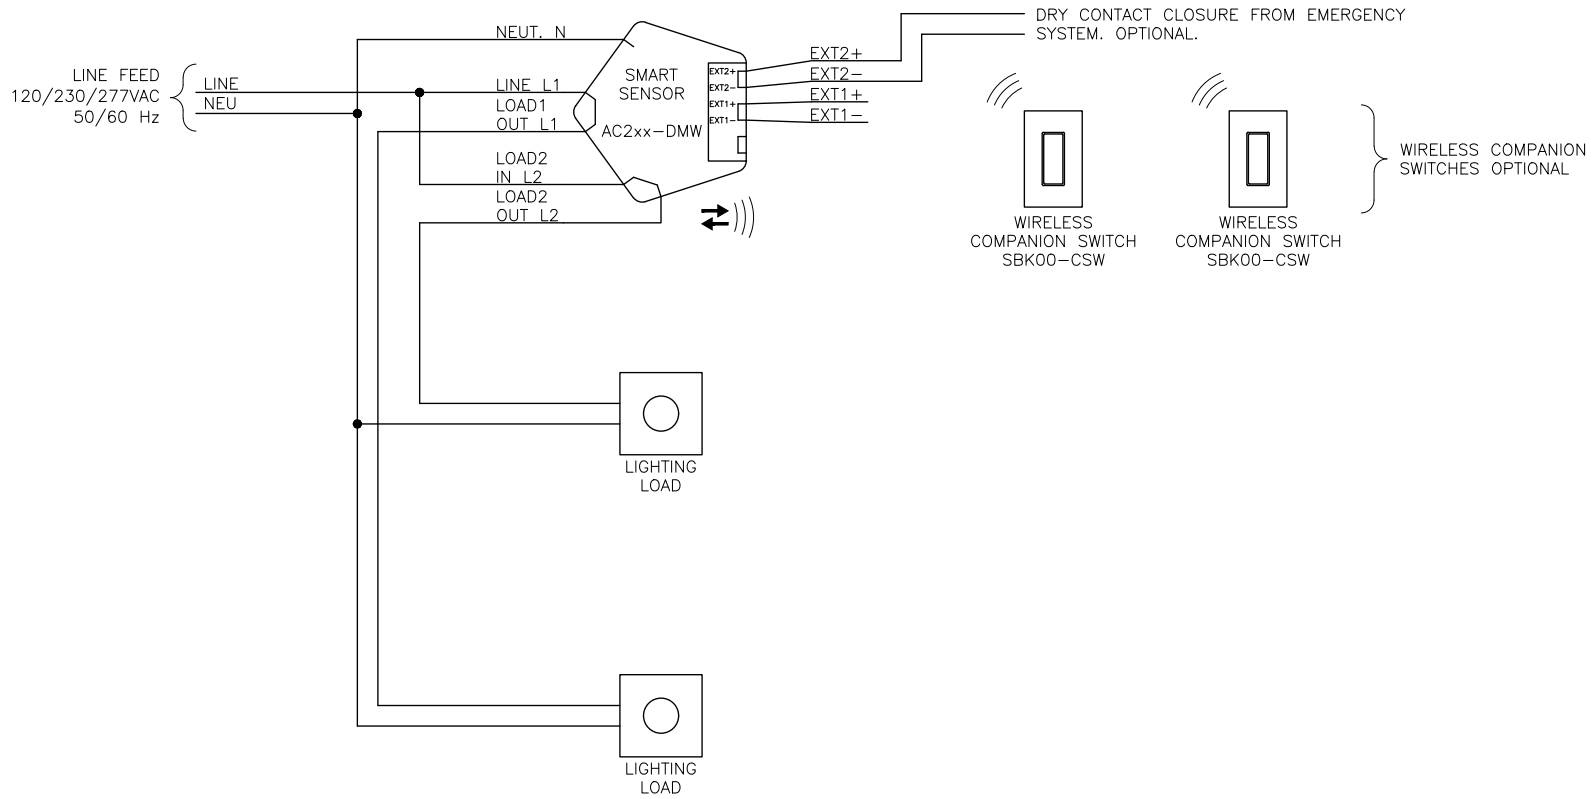

DUAL RELAY CMS WITH OVERRIDE SWITCH AND POWER PACK FOR LOW VOLTAGE HVAC DRY CONTACT CLOSURE

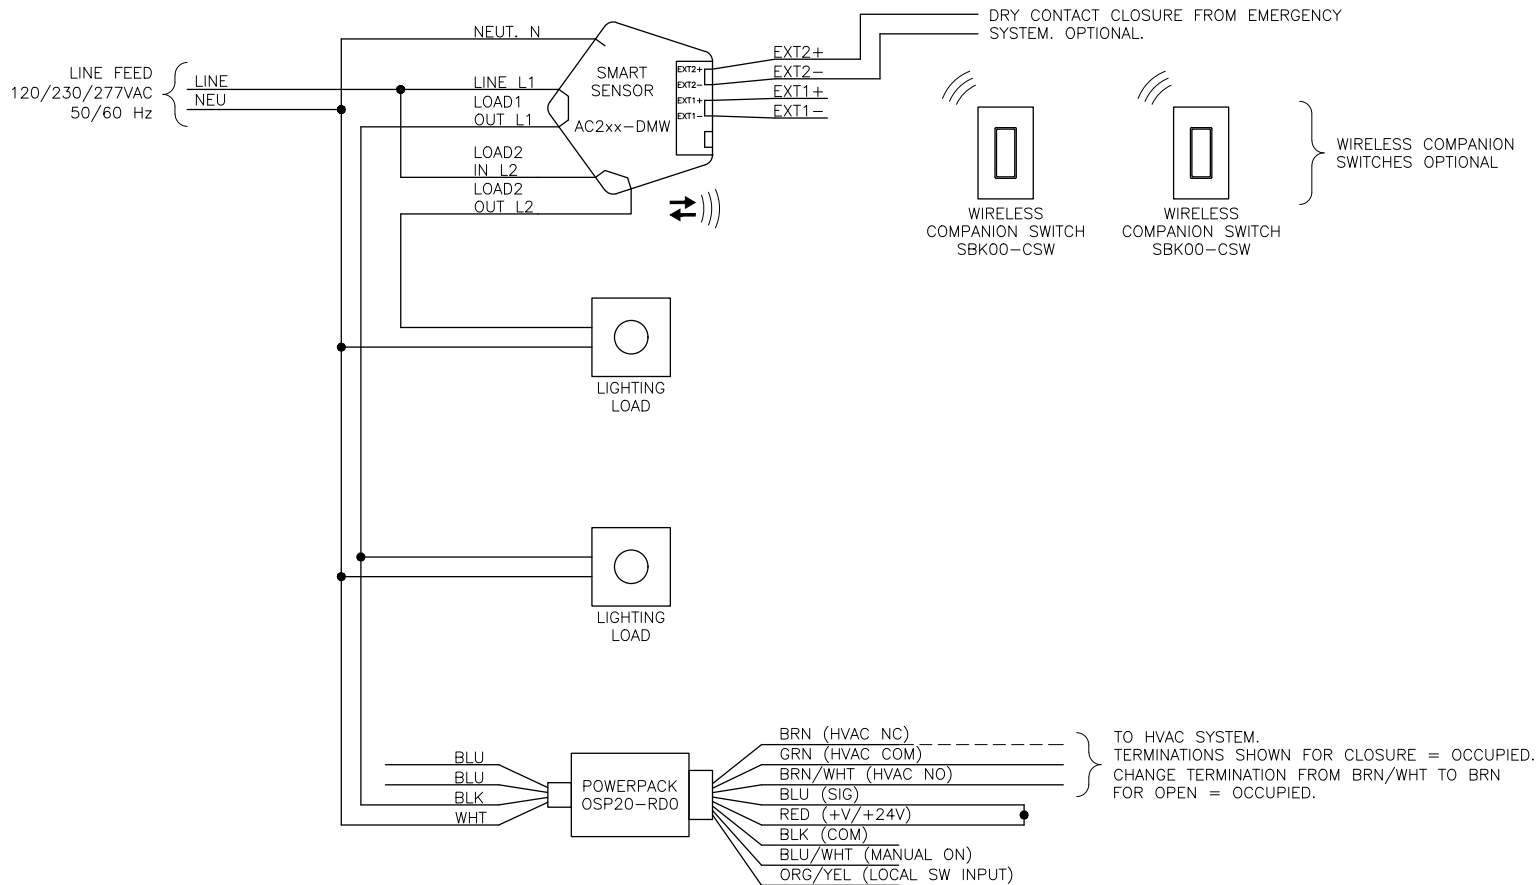

DESCRIPTION



1. THE POWER PACK CONTAINS A POWER SUPPLY, LINE LEVEL LOAD SWITCHING RELAY (NOT REQUIRED FOR THIS OPERATION) AND A LOW VOLTAGE HVAC ISOLATED RELAY.
2. THE BLACK LINE L1 (120-230-277VAC) WILL BE CONNECTED TO THE LINE FEED HOT (BLACK).
3. THE LINE OUT L1 WILL BE CONNECTED TO THE LOAD AND THE POWER PACK HIGH VOLTAGE BLACK.
4. ODC, POWER PACK, AND LOAD NEUTRALS WILL BE TERMINATED TO THE LINE FEED NEUTRAL (WHITE).
5. THE POWER PACK LOW VOLTAGE RED (24VDC) WILL BE TERMINATED TO THE POWER PACK BLUE (SIG).
6. THE HVAC SYSTEM WILL TERMINATE + VOLTAGE TO THE POWER PACK LOW VOLTAGE RELAY COMMON (GREEN). THE SECOND HVAC LEAD WILL TERMINATE TO EITHER THE NC (BROWN) OR NO (BROWN/WHITE) DEPENDING IF IT NEEDS TO SEE OPEN OR CLOSED CONTACT FOR OCCUPANCY, RESPECTIVELY.
7. INDIVIDUALLY CAP OFF UNUSED LEADS.
8. GROUND NOT SHOWN FOR CLARITY. GROUND AS REQUIRED BY NATIONAL AND LOCAL CODES AND BEST PRACTICES.

OPERATIONAL NOTES:

1. WHEN THE ODC ENERGIZES ITS ATTACHED LOAD, IT WILL ALSO ENERGIZE THE ATTACHED POWER PACK, CHANGING THE STATE OF THE HVAC RELAY FROM THE NORMAL POSITION.
2. WHEN THE ODC DE-ENERGIZES ITS ATTACHED LOAD, THE POWER PACK WILL ALSO BE DE-ENERGIZED, RETURNING THE HVAC RELAY TO THE NORMAL STATE.
3. HVAC RELAY MAY NOT FOLLOW ROOM OCCUPANCY UNDER TWO CONDITIONS:
 - A. WHEN THE ODC IS SET TO OPERATE IN MANUAL MODE AND THE LOAD ISN'T ENERGIZED MANUALLY WITH OCCUPANCY;
 - B. WHEN THE LOAD IS MANUALLY TURNED OFF WHILE THE ROOM IS STILL OCCUPIED.

TO HVAC SYSTEM.
TERMINATIONS SHOWN FOR CLOSURE = OCCUPIED.
CHANGE TERMINATION FROM BRN/WHT TO BRN
FOR OPEN = OCCUPIED.



CMS LARGE SPACE, SINGLE ZONE, AUTO ON/OFF ONLY

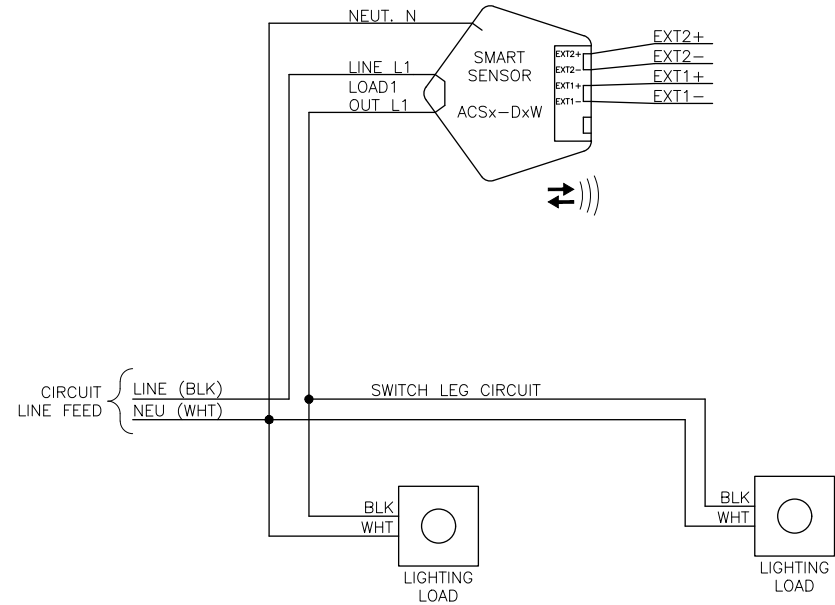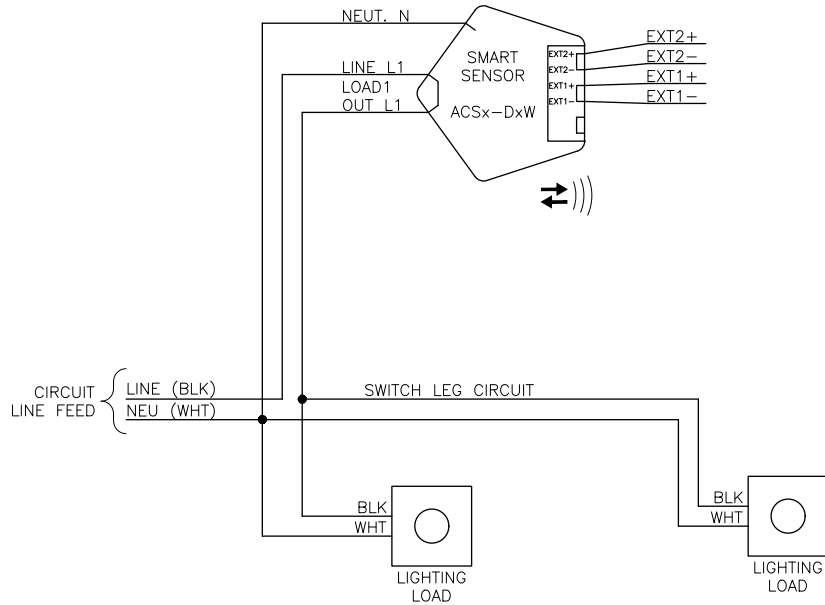

OPERATIONAL NOTE:

1. TO ENSURE OPERATIONAL SYNCHRONIZATION AND AVOID FALSE OFF SENSORS MUST OPERATE IN AUTO ON/OFF MODE ONLY, NO MANUAL CONTROL.
2. SENSORS MAY BE PLACED ASYMMETRICALLY WITH LIGHTING FIXTURES.
3. ANY SENSOR BECOMING ACTIVE WILL ENERGIZE ALL FIXTURES IN THE ZONE.
4. REFER TO SENSOR DATA SHEET TO ENSURE SENSOR RELAY RATING IS NOT EXCEEDED.


CMS LARGE SPACE, TWO ZONE, AUTO ON/OFF ONLY

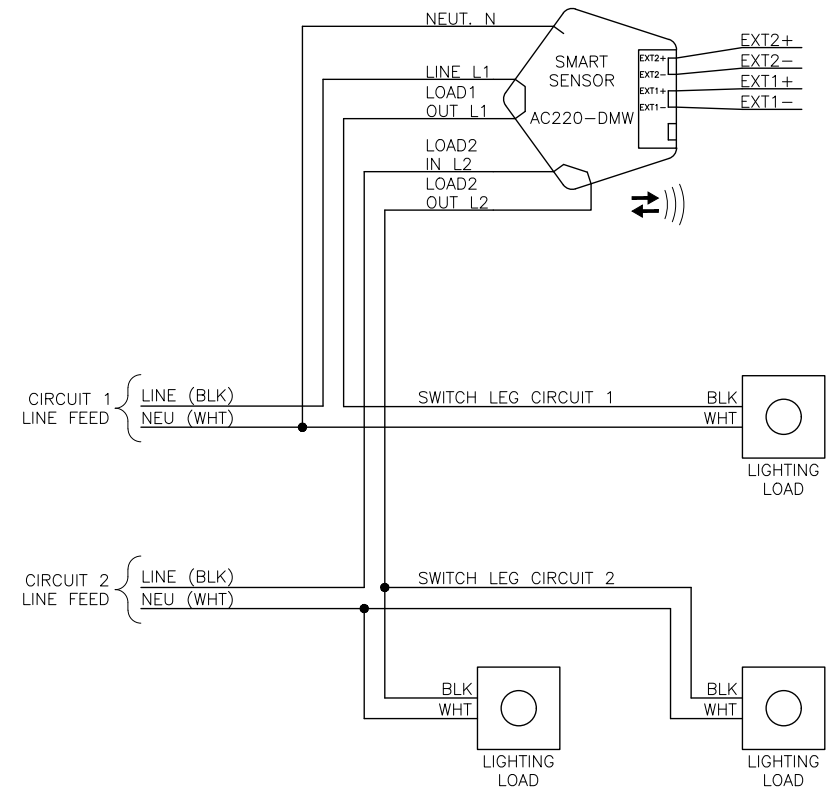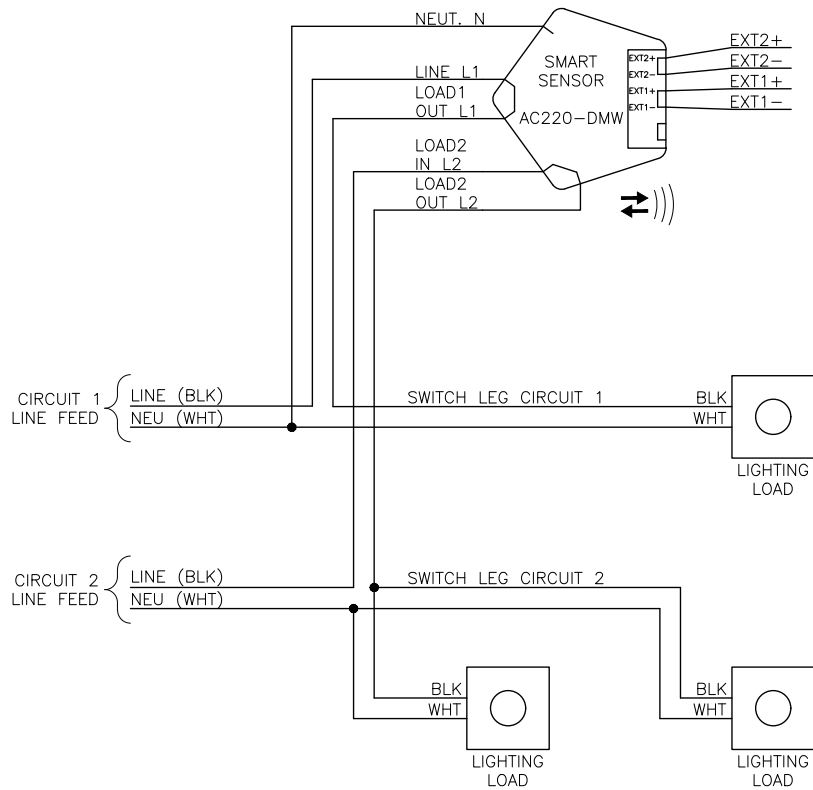


OPERATIONAL NOTE:

1. TO ENSURE OPERATIONAL SYNCHRONIZATION AND AVOID FALSE OFF:
 - SENSORS MUST OPERATE IN AUTO ON/OFF MODE ONLY, NO MANUAL CONTROL.
2. SENSORS MAY BE PLACED ASYMMETRICALLY WITH LIGHTING FIXTURES.
3. ANY SENSOR BECOMING ACTIVE WILL ENERGIZE ALL SENSORS/FIXTURES NETWORKED TOGETHER.
4. REFER TO SENSOR DATA SHEET TO ENSURE SENSOR RELAY RATING IS NOT EXCEEDED.

CMS WITH WIRELESS COMPANION SWITCH

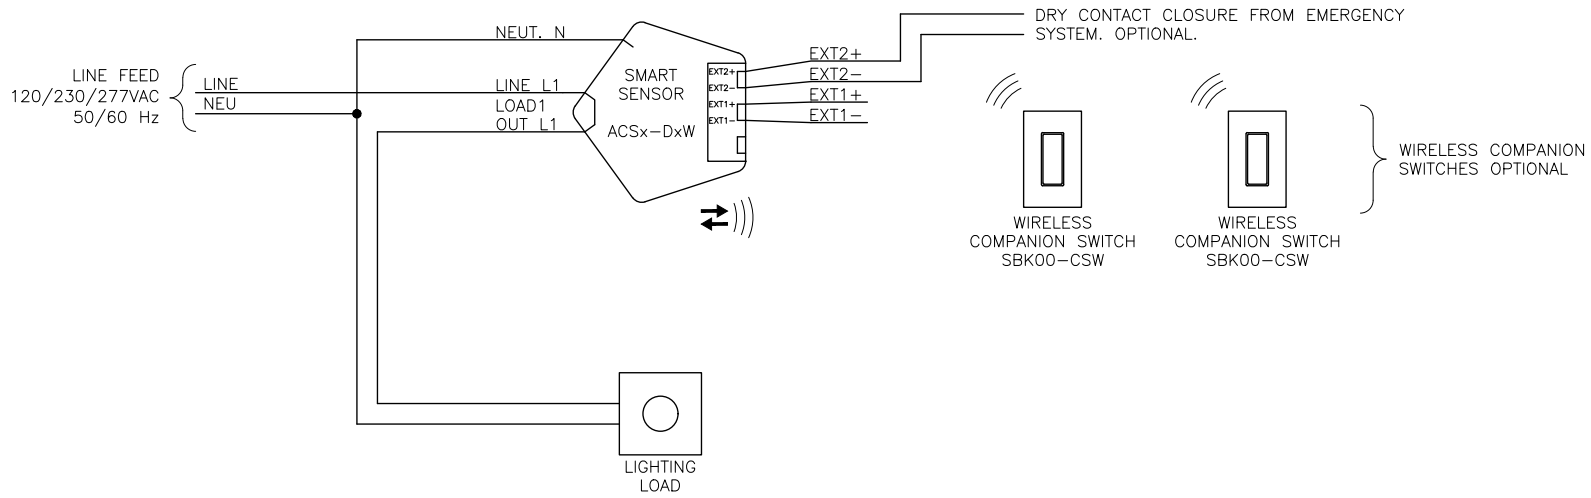

CMS WITH POWER PACK FOR LOW VOLTAGE HVAC DRY CONTACT CLOSURE

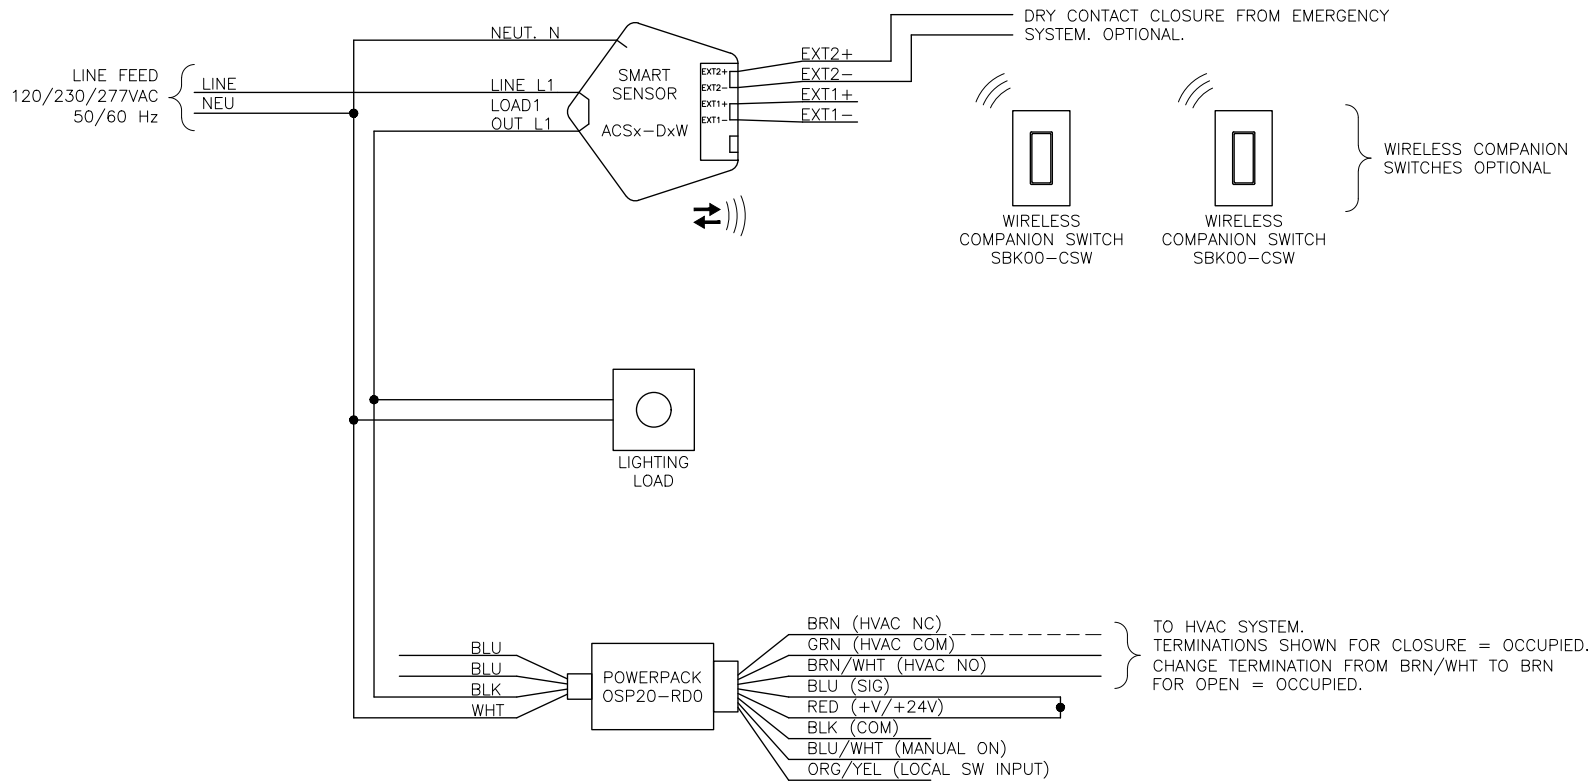


DESCRIPTION

1. THE POWER PACK CONTAINS A POWER SUPPLY, LINE LEVEL LOAD SWITCHING RELAY (NOT REQUIRED FOR THIS OPERATION) AND A LOW VOLTAGE HVAC ISOLATED RELAY.
2. THE BLACK LINE L1 (120-230-277VAC) WILL BE CONNECTED TO THE LINE FEED HOT (BLACK).
3. THE LINE OUT L1 WILL BE CONNECTED TO THE LOAD AND THE POWER PACK HIGH VOLTAGE BLACK.
4. ODC, POWER PACK, AND LOAD NEUTRALS WILL BE TERMINATED TO THE LINE FEED NEUTRAL (WHITE).
5. THE POWER PACK LOW VOLTAGE RED (24VDC) WILL BE TERMINATED TO THE POWER PACK BLUE (SIG).
6. THE HVAC SYSTEM WILL TERMINATE + VOLTAGE TO THE POWER PACK LOW VOLTAGE RELAY COMMON (GREEN). THE SECOND HVAC LEAD WILL TERMINATE TO EITHER THE NC (BROWN) OR NO (BROWN/WHITE) DEPENDING IF IT NEEDS TO SEE OPEN OR CLOSED CONTACT FOR OCCUPANCY, RESPECTIVELY.
7. INDIVIDUALLY CAP OFF UNUSED LEADS.
8. GROUND NOT SHOWN FOR CLARITY. GROUND AS REQUIRED BY NATIONAL AND LOCAL CODES AND BEST PRACTICES.

OPERATIONAL NOTES:

1. WHEN THE ODC ENERGIZES ITS ATTACHED LOAD, IT WILL ALSO ENERGIZE THE ATTACHED POWER PACK, CHANGING THE STATE OF THE HVAC RELAY FROM THE NORMAL POSITION.
2. WHEN THE ODC DE-ENERGIZES ITS ATTACHED LOAD, THE POWER PACK WILL ALSO BE DE-ENERGIZED, RETURNING THE HVAC RELAY TO THE NORMAL STATE.
3. HVAC RELAY MAY NOT FOLLOW ROOM OCCUPANCY UNDER TWO CONDITIONS:
 - A. WHEN THE ODC IS SET TO OPERATE IN MANUAL ON MODE AND THE LOAD ISN'T ENERGIZED MANUALLY WITH OCCUPANCY;
 - B. WHEN THE LOAD IS MANUALLY TURNED OFF WHILE THE ROOM IS STILL OCCUPIED.


RESTROOM WITH FAN CONTROL

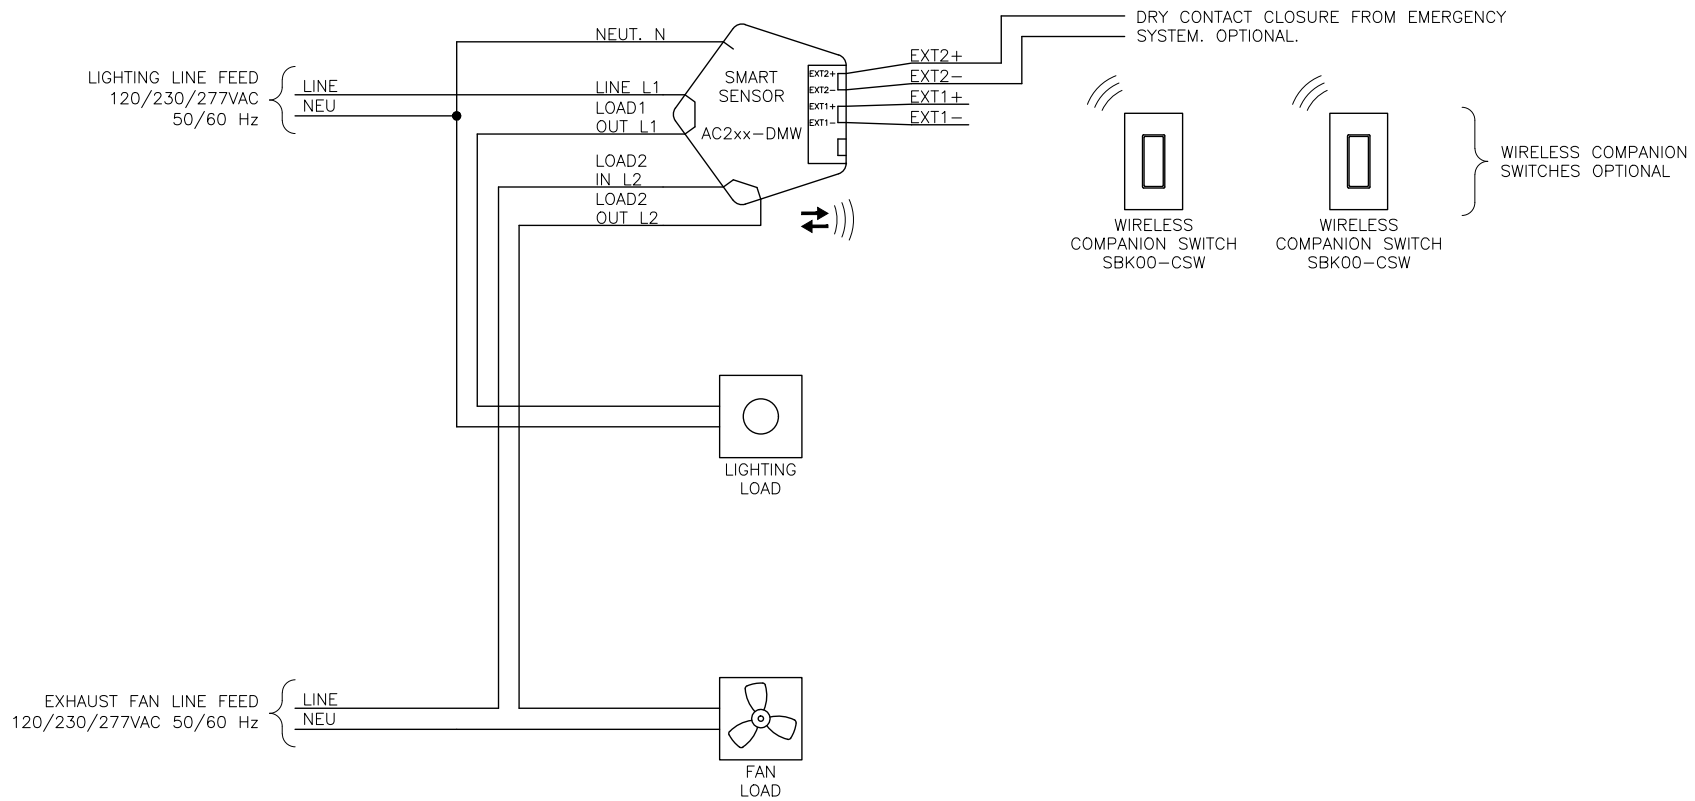

OPERATIONAL NOTES:

1. CONFIGURE SENSOR AS APPROPRIATE TO JOB REQUIREMENTS:
 - LOAD 2: 10 MINUTE DELAY OFF.


SMALL OFFICE, SINGLE ZONE

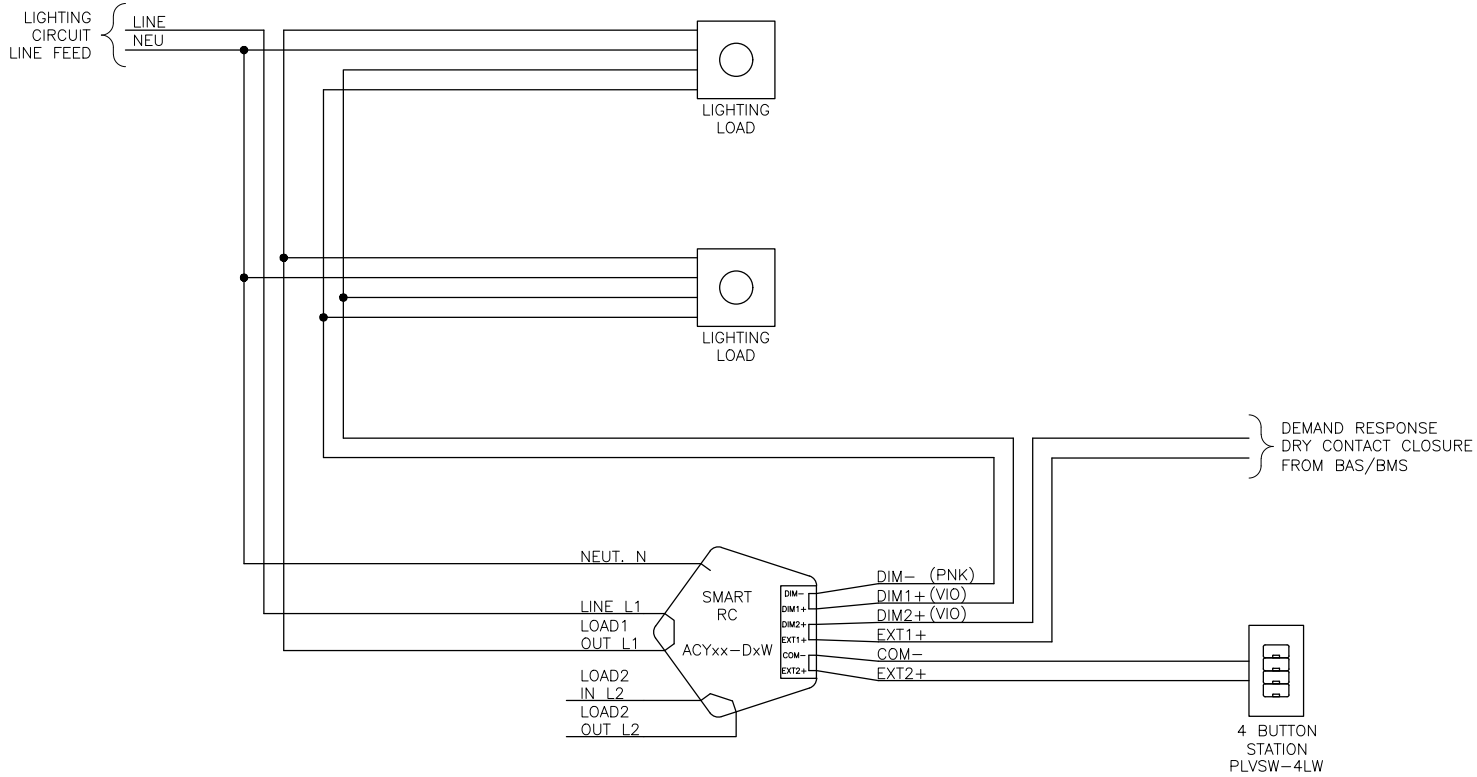

NOTES:

1. 0-10V PINK WIRE MAY BE GRAY.


SMALL OFFICE, TWO ZONE

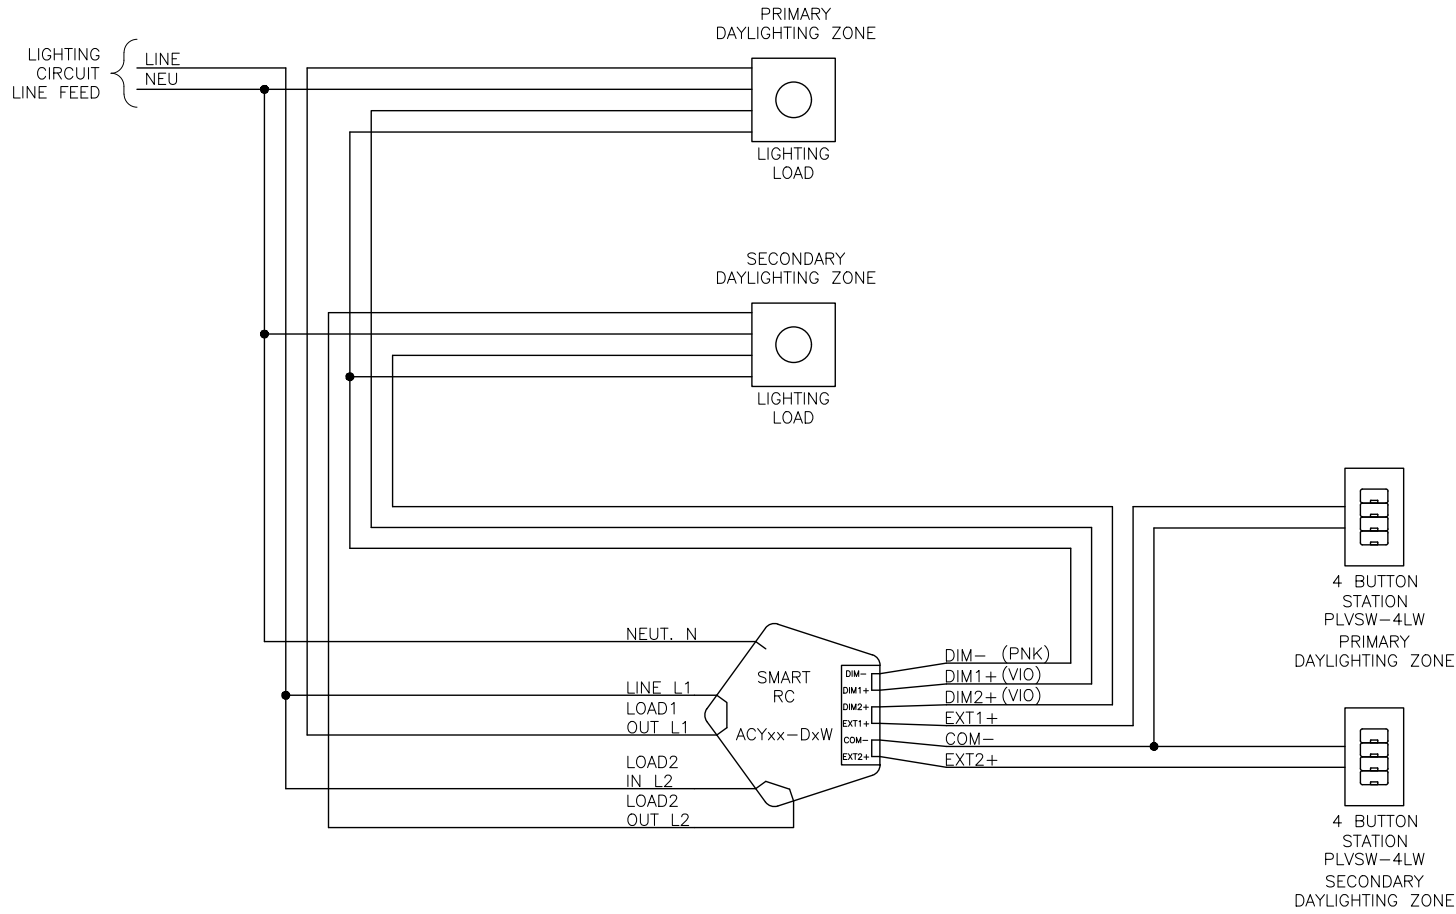

NOTES:

1. 0-10V PINK WIRE MAY BE GRAY.


STAIRWELL BI-LEVEL CONTROL

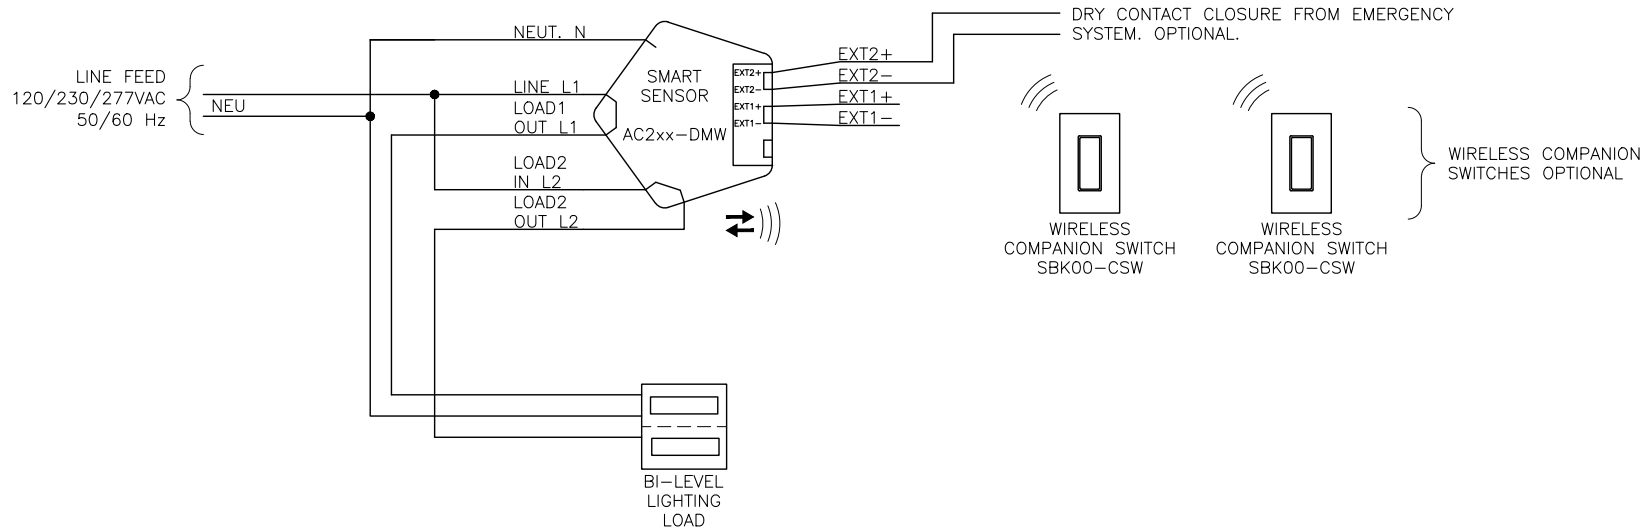

OPERATIONAL NOTES:

1. CONFIGURE AS APPROPRIATE TO JOB REQUIREMENTS:
 - STEP DIMMING (BI-LEVEL) ALTERNATING WHICH IS ENERGIZED PRIMARY;
 - STEP DIMMING, (BI-LEVEL) FIXED PRIMARY;
 - ALTERNATE ENERGIZED LIGHTING LOAD.
2. CONFIGURATION SHOWN FOR SINGLE SENSED LANDING AREA. ADD SENSORS IN PARALLEL TO ADD LANDINGS TO THE SAME CONTROLLED ZONE.


STAIRWELL LANDING, SINGLE ZONE

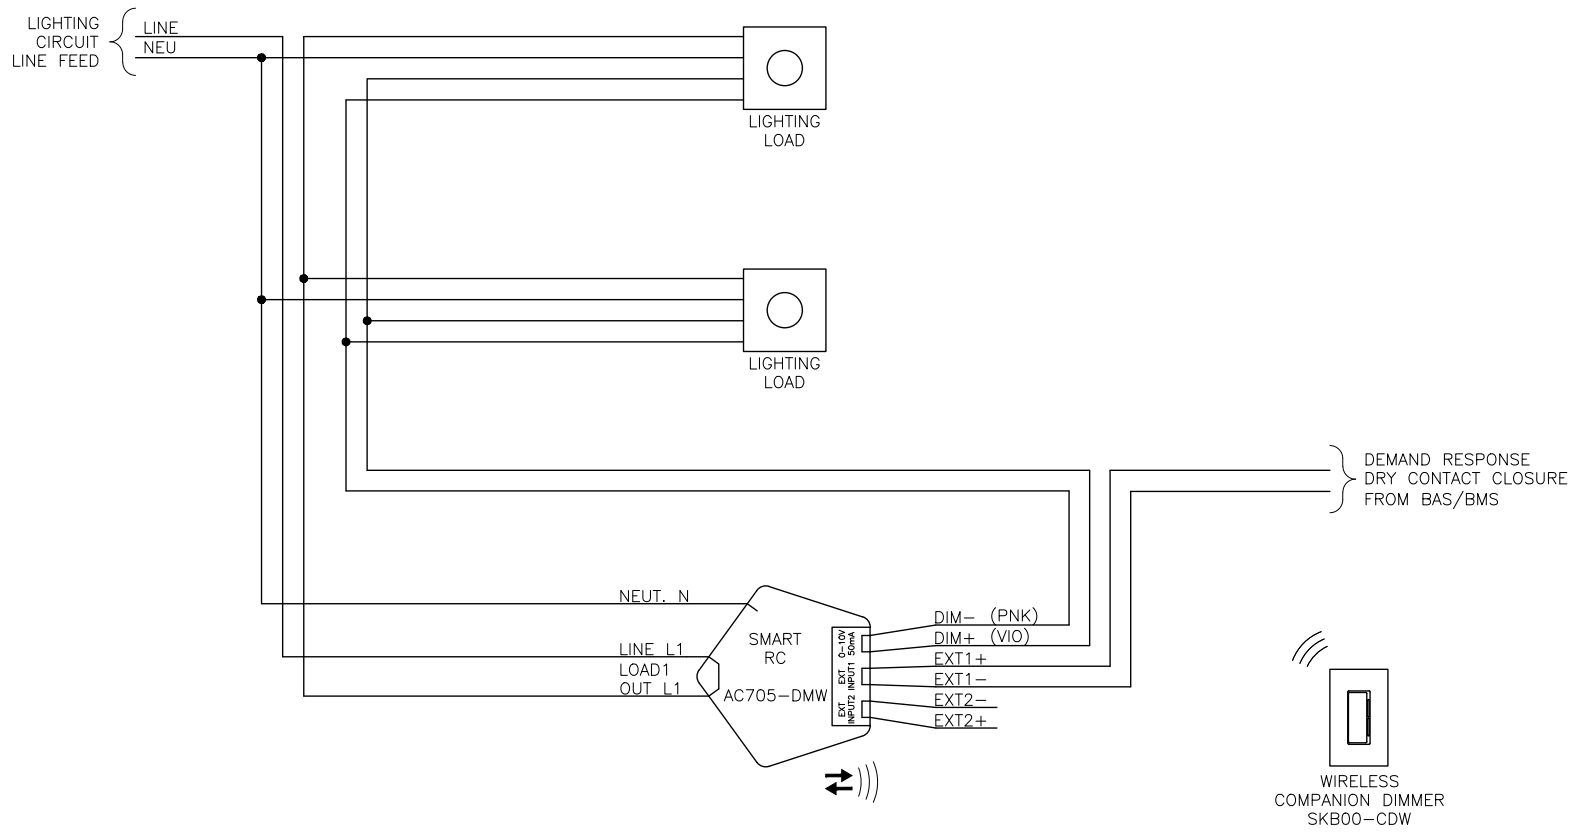

NOTES:

1. 0-10V PINK WIRE MAY BE GRAY.


STAIRWELL LANDING, TWO ZONE

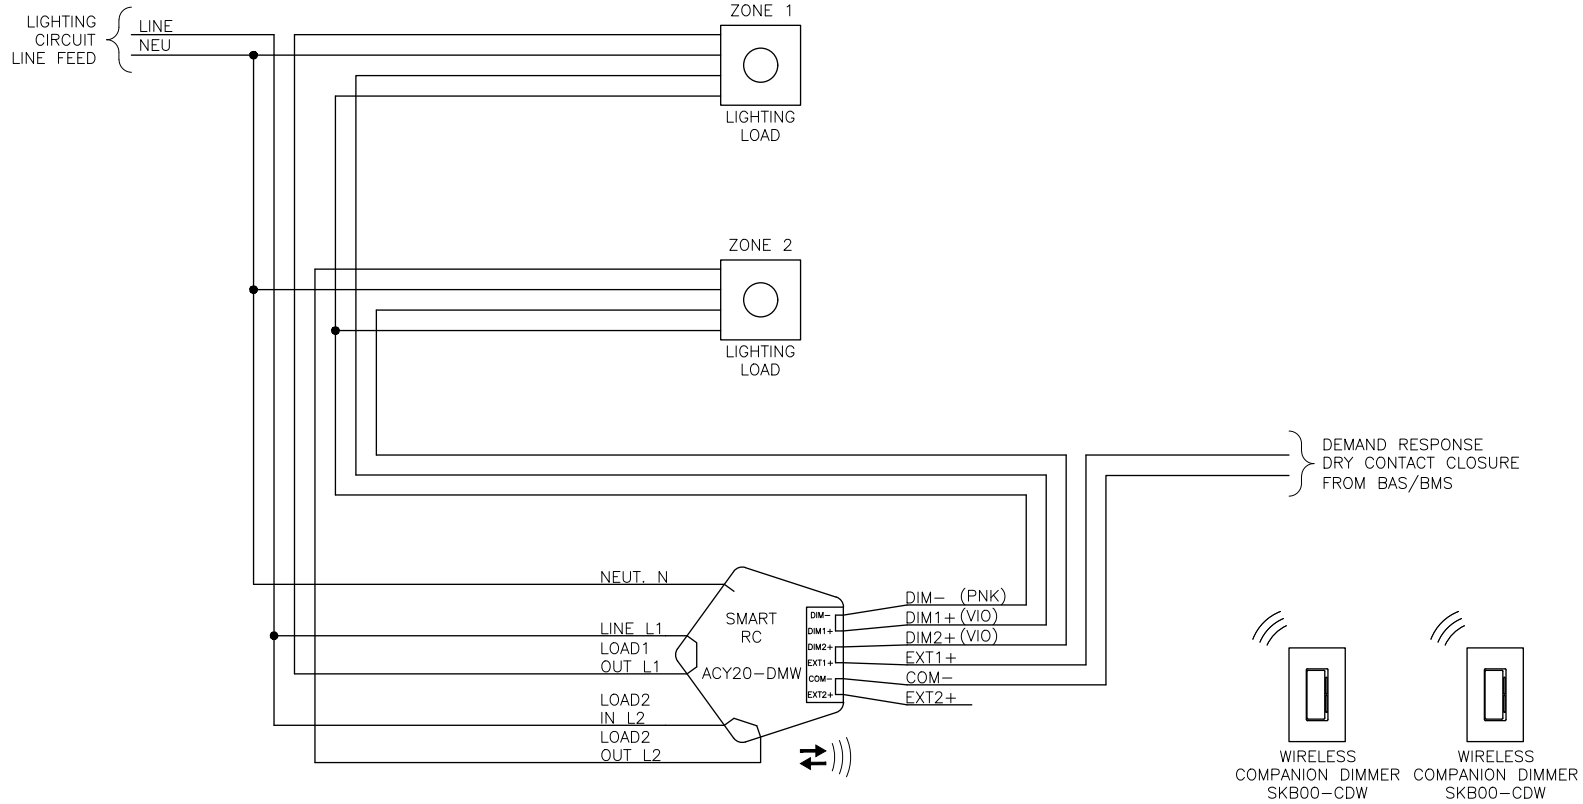

NOTES:

1. 0-10V PINK WIRE MAY BE GRAY.


SRC DIMMING, DAYLIGHT HARVESTING, TWO ZONE

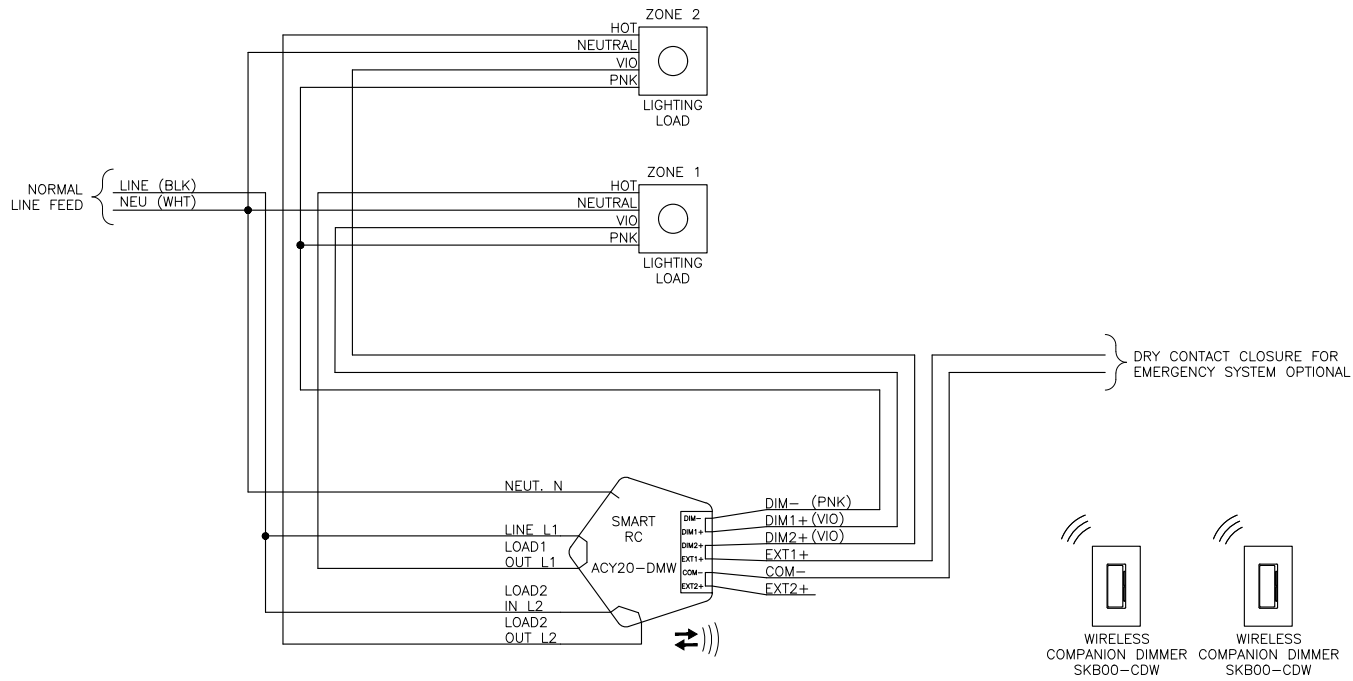

NOTES:

1. TERMINATIONS NOT PARTICIPATING IN THIS SCHEME NOT SHOWN FOR CLARITY.
2. 0-10V PINK WIRE MAY BE GRAY.


SRC DIMMING, DAYLIGHT HARVESTING, EXPANDED FIELD OF VIEW, FOUR ZONE WITH INDEPENDENT MANUAL LIGHTING CONTROL

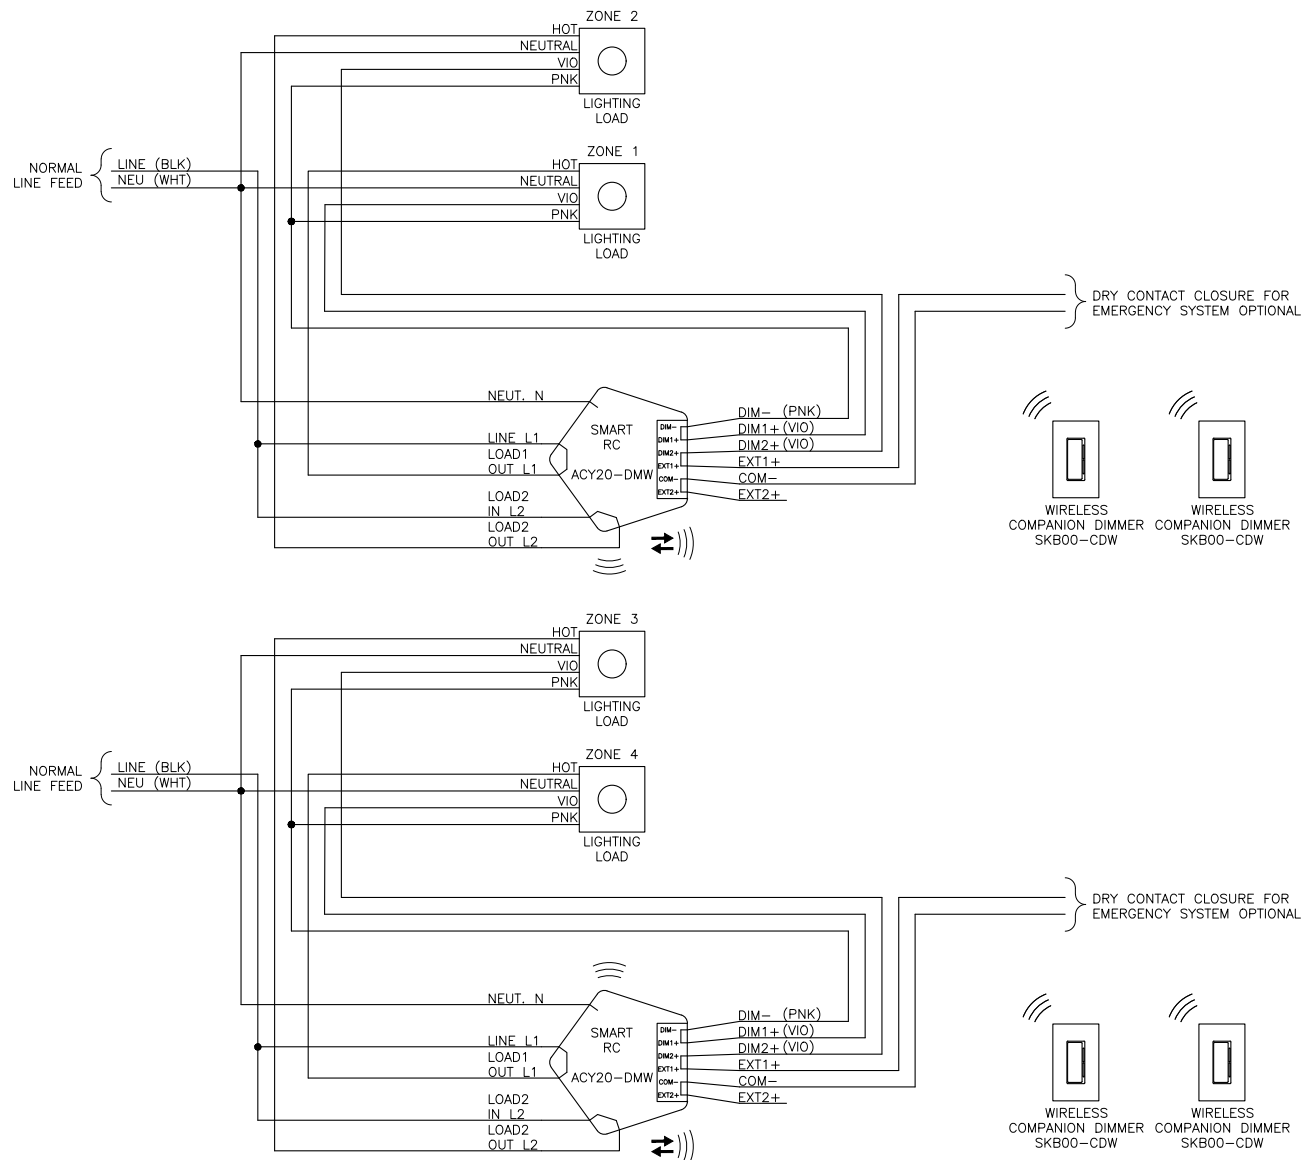

NOTES:

1. TERMINATIONS NOT PARTICIPATING IN THIS SCHEME NOT SHOWN FOR CLARITY.
2. 0-10V PINK WIRE MAY BE GRAY.


SRC 4-WIRE DIMMED LOAD, 0-10V

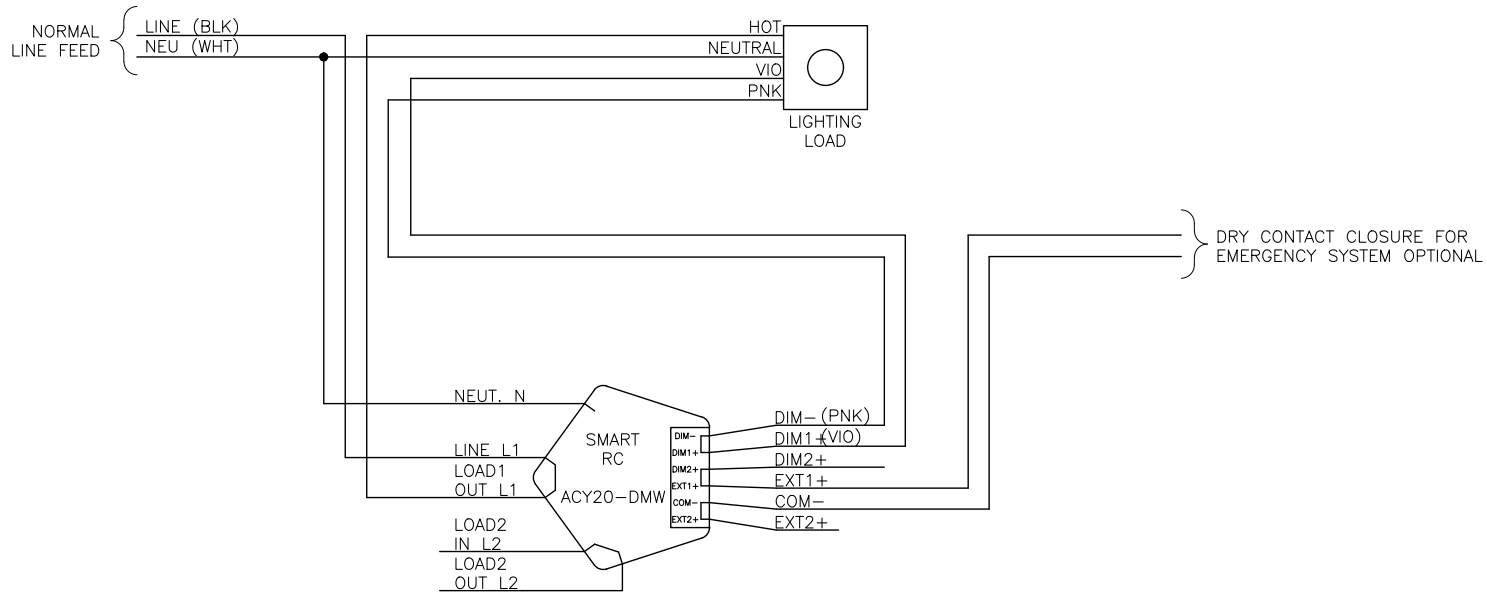

NOTES:

1. TERMINATIONS NOT PARTICIPATING IN THIS SCHEME NOT SHOWN FOR CLARITY.


SRC AUTO ON/OFF, MANUAL ON/OFF

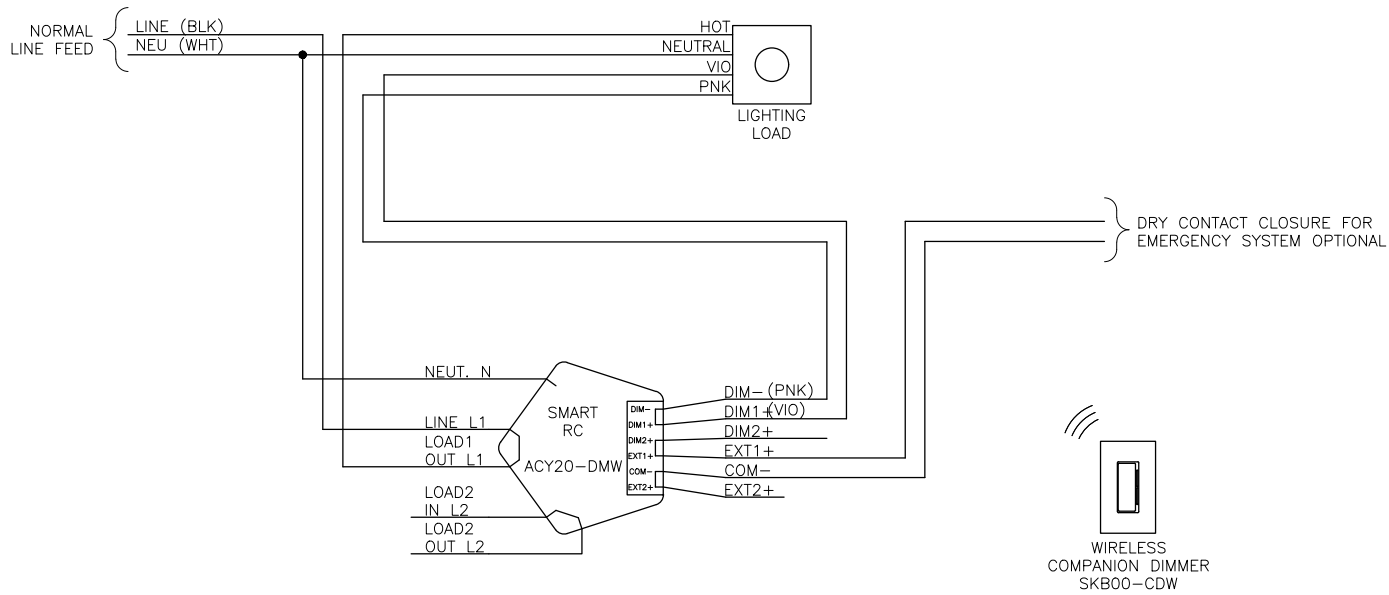


NOTES:

1. TERMINATIONS NOT PARTICIPATING IN THIS SCHEME NOT SHOWN FOR CLARITY.
2. 0-10V PINK WIRE MAY BE GRAY.

CMS SWITCHED LOAD, UL924 BYPASS

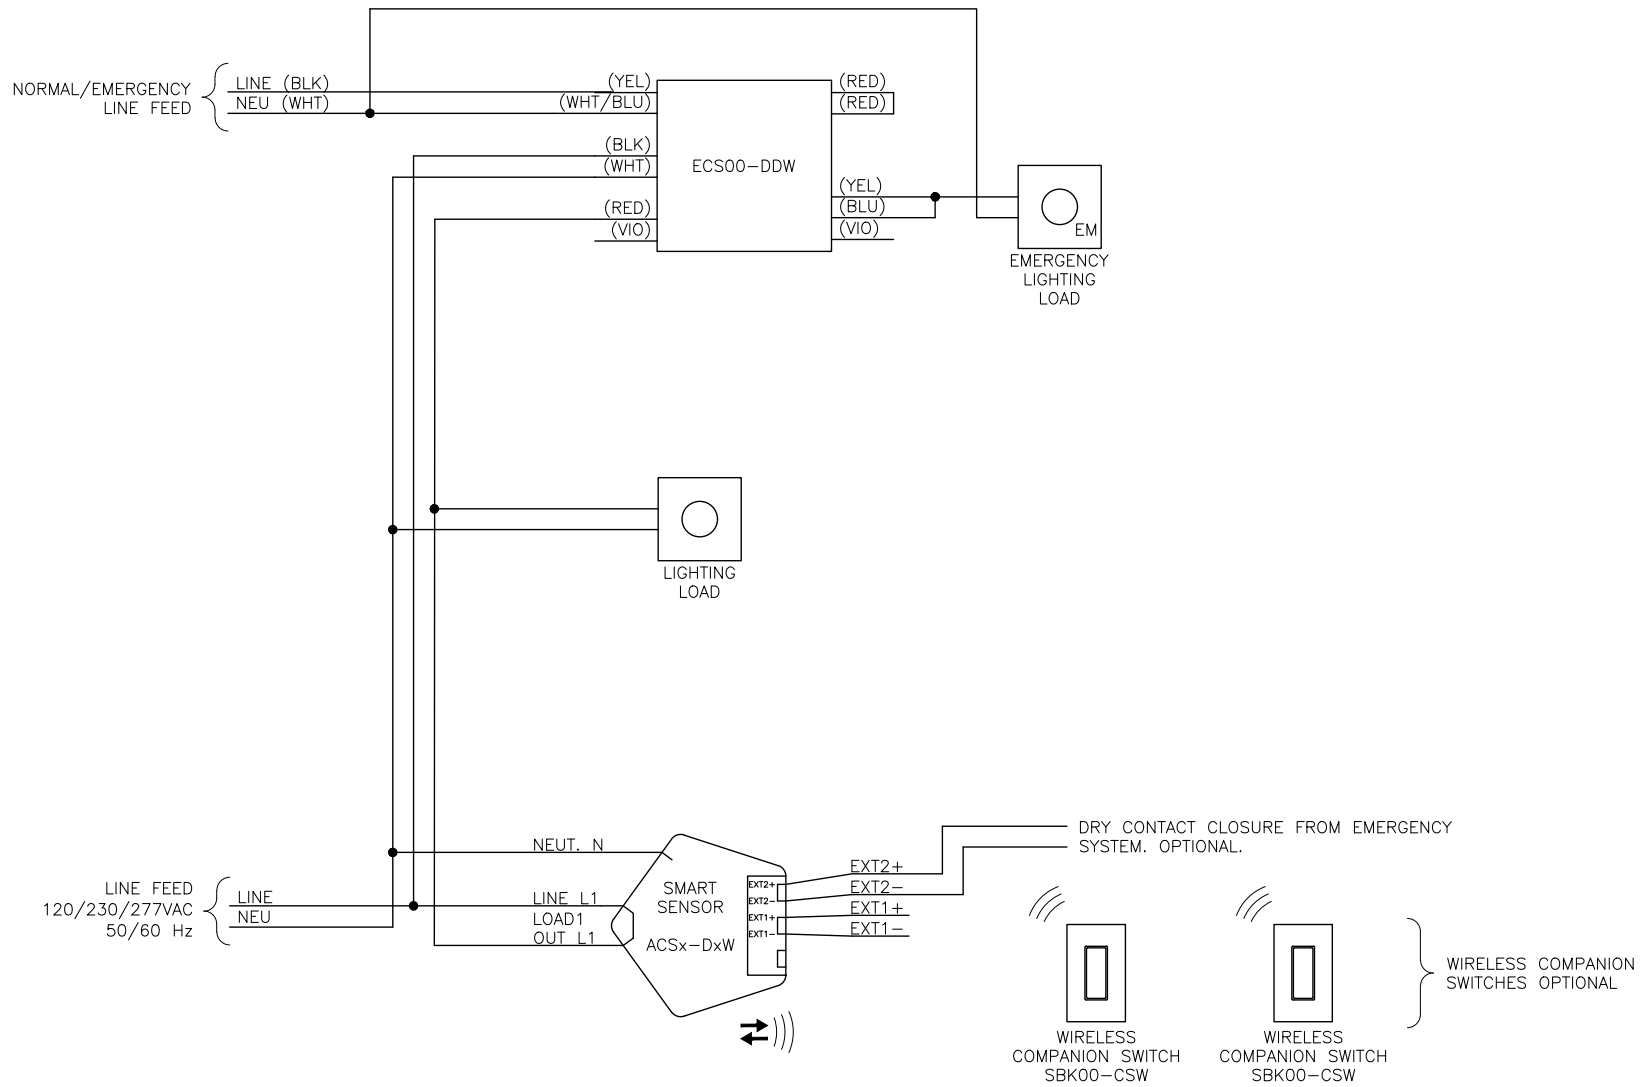

CMS DIMMED LOAD, UL924 BYPASS

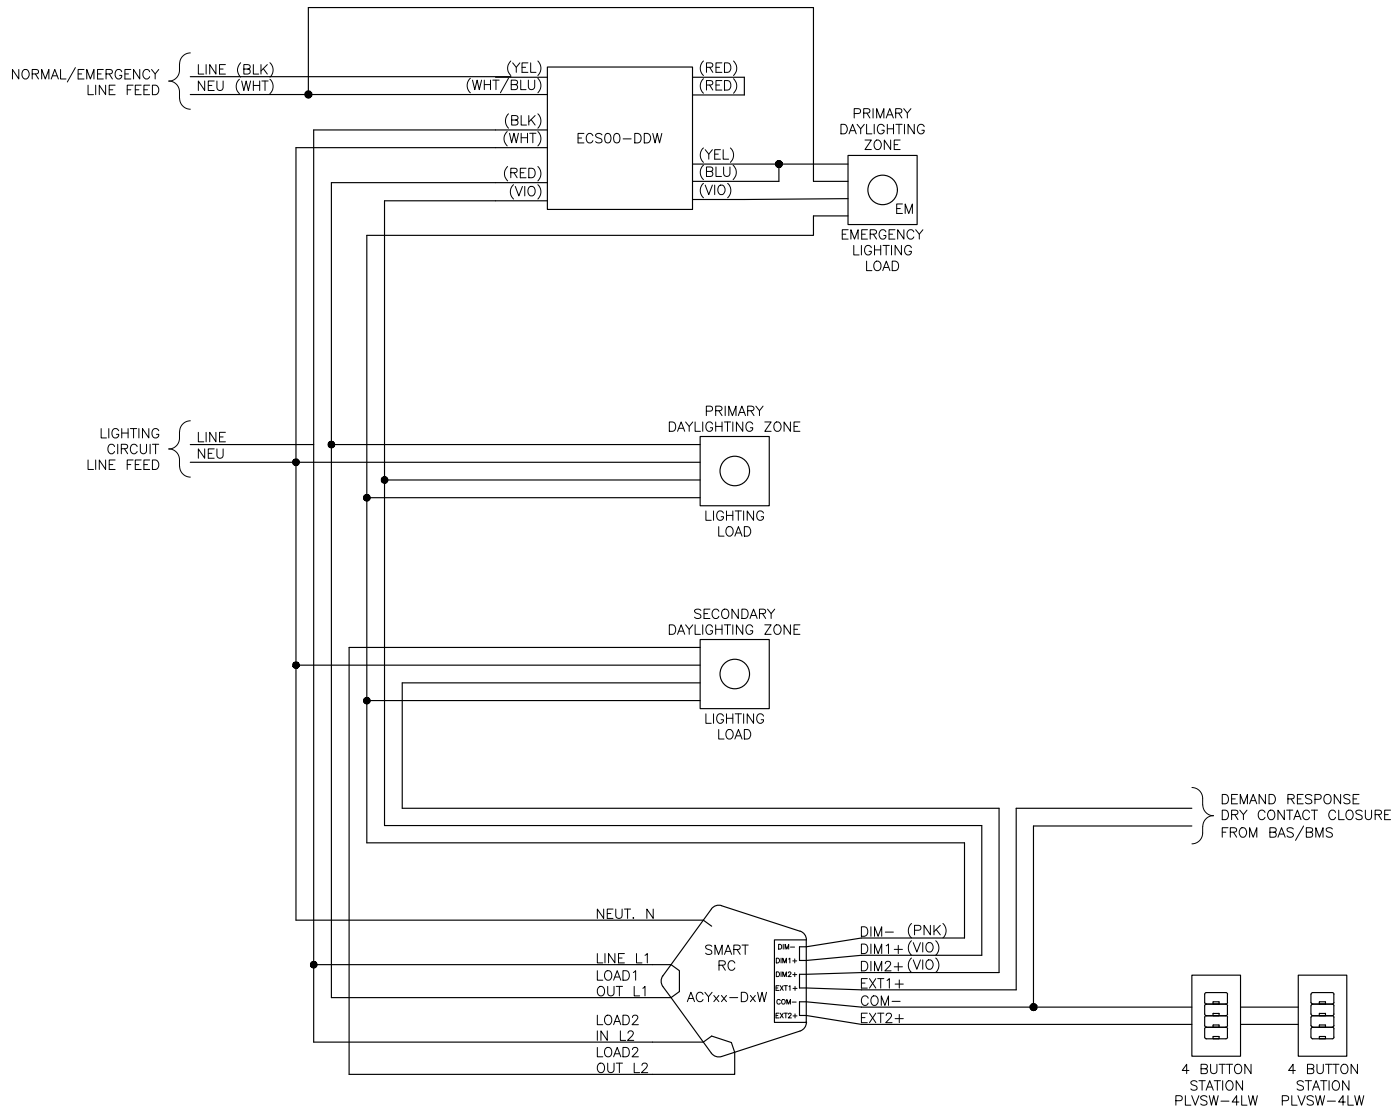

NOTES:

1. 0-10V PINK WIRE MAY BE GRAY.
2. EMERGENCY BYPASS APPLIED TO FIRST ZONE. EMERGENCY MAY BE APPLIED TO EITHER ZONE.
3. APPLYING EMERGENCY BYPASS TO BOTH ZONES REQUIRES A BYPASS PER ZONE.
4. TERMINATIONS FOR DEMAND RESPONSE AND SWITCHES SHOWN AS EXAMPLE.



Leviton Manufacturing Co., Lighting & Controls

20497 SW 10385 SW Avery St, Tualatin, OR 97062 **tel** 800-736-6682 **fax** 503-404-5594 **tech line** (6:00AM-4:00PM PT Mon-Fri) 800-959-6004

Leviton Manufacturing Co., Inc. Global Headquarters

201 North Service Road, Melville, NY 11747-3138 **tel** 800-323-8920 **fax** 800-832-9538 **tech line** (8:00AM-10:00PM ET Mon-Fri, 9:00AM-7:00PM ET Sat, 9:00AM-5:00PM ET Sun) 800-824-3005

Visit our Website at: www.leviton.com/smartsensors

©2024 Leviton Manufacturing Co., Inc. All rights reserved. Subject to change without notice.

LES-G-10737A/I24-mm
REV SEP 2024