




INSTALLING THE OPT 7512-01 DMX512 KIT ON MC 7000 SERIES CONSOLE



1. Remove screws from bottom of the MC 7000 Series Console and remove bottom cover.
2. Remove the 2 screws securing the DMX512 option plate and remove cover plate.
3. Insert the DMX512 5-pin connector through the mounting hole and install the hardware provided as shown.
4. Connect cable from DMX512 connector to 5-pin connection as per illustration.
5. Install 485 (3695) IC into 8-pin socket (U46) as shown, being sure to observe the orientation of the notch or dimple.
6. Replace the bottom cover and secure.
7. Since DMX512 does not provide phantom power like Micro-plex, the included power supply is required to power the console.


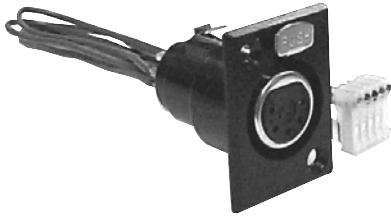


OPT 7512-01

DMX512 KIT

INSTALLATION GUIDE

DI-401-A7512-01B

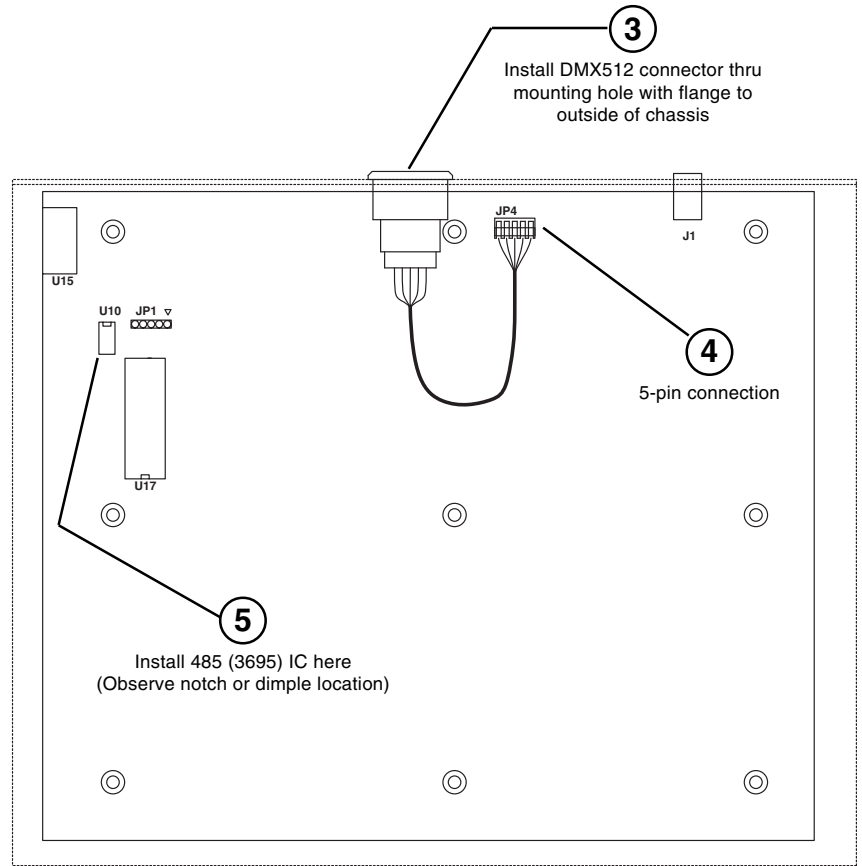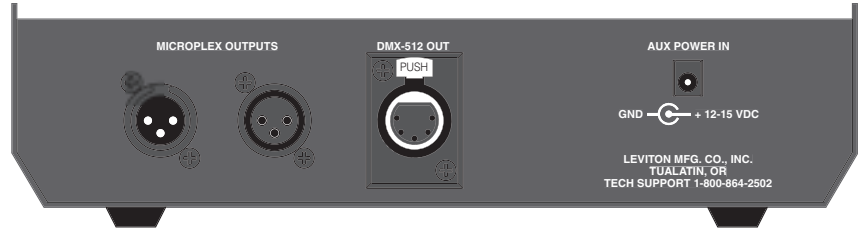

Leviton NSI Division Headquarters
20497 SW Teton Avenue, Tualatin, OR 97062

Customer Service Telephone: 800.736.6682
Customer Service Fax: 503.404.5594
Technical Services: 800.959.6004

Leviton Manufacturing Company, Incorporated.
59-25 Little Neck Parkway, Little Neck, NY 11362-2591.

Visit Leviton's websites at <http://www.nsicorp.com> &
<http://www.leviton.com>

Copyright© 2003. Leviton Manufacturing Company, Inc. All Rights Reserved
Specifications and pricing subject to change at any time.

WEB VERSION

Bottom view.
Back of PC board exposed with bottom of unit removed.

