

EIA Rack Enclosure

Cat. No. EIA00-S01



DI-000-EIA00-00A

INSTALLATION INSTRUCTIONS

DESCRIPTION:

The EIA rack enclosure supports the installation of 19" 1RU devices, up to 12.5" in depth. The surface mount enclosure is a sideways wall mount enclosure with the opening in the side and a front cover that opens to expose internal wiring.

SPECIFICATIONS:

Dimensions: 19.125" (485.8mm) x 13.5" (342.9mm) x 1.9" (48.3mm)

Knockouts: 1/2" or 3/4" (1 on top, 1 on bottom, and 2 on side)

Weight: 11.3lbs (5.13kg)

INSTALLATION:

NOTE: The wall must be capable of supporting the weight of the enclosure as well as the cables, conduit and devices to be installed.

NOTE: The EIA00-S01 enclosure is designed to mount sideways on the wall.

1. Determine location for enclosure to be mounted. See **Figure 3** on page 2 for dimensions of the unit.
2. Determine device and wire placement in the enclosure.
3. Remove necessary conduit knockouts (**Figure 1**) to accommodate the device cables, add knockouts as required.
4. Remove the five screws on the front cover (**Figure 1**) and then the front cover itself and set them aside.
5. Use the keyhole slot dimensions in **Figure 2** to mark the locations of the four mounting screws.
6. Install four wall anchors (not provided) at the locations marked leaving 1/4 inch of threads exposed.
7. Using the keyholes on the back of the unit, place the enclosure onto the screws of the wall anchors.
8. Adjust and level the enclosure and tighten the screws to secure the enclosure.
9. Secure devices to the enclosure.
10. Follow device installation instructions.
11. Replace cover.

TECHNICAL SUPPORT:



Customer Service: (800) 736-6682


Technical Support: (800) 959-6004

Fax: (503) 404-5601

Email: lestechsupport@leviton.com

Internet: www.leviton.com

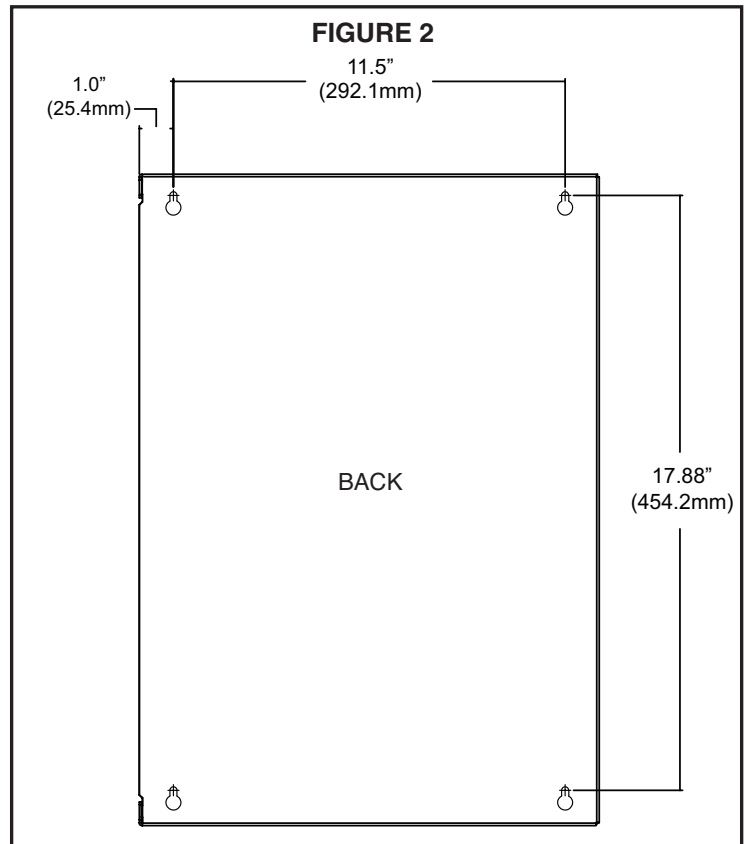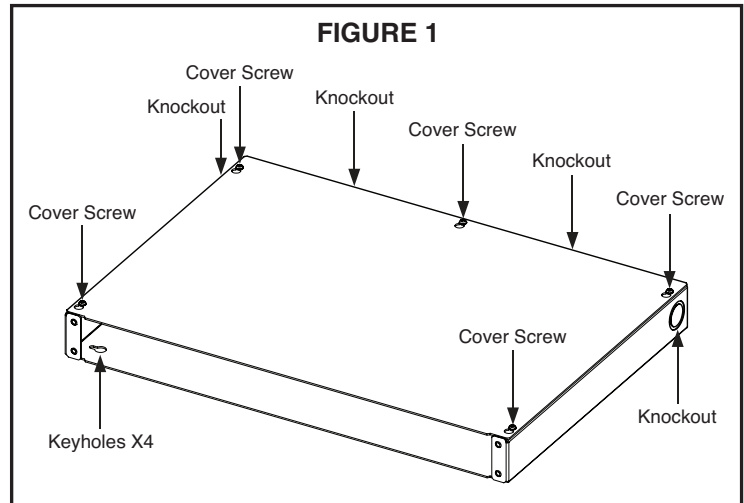

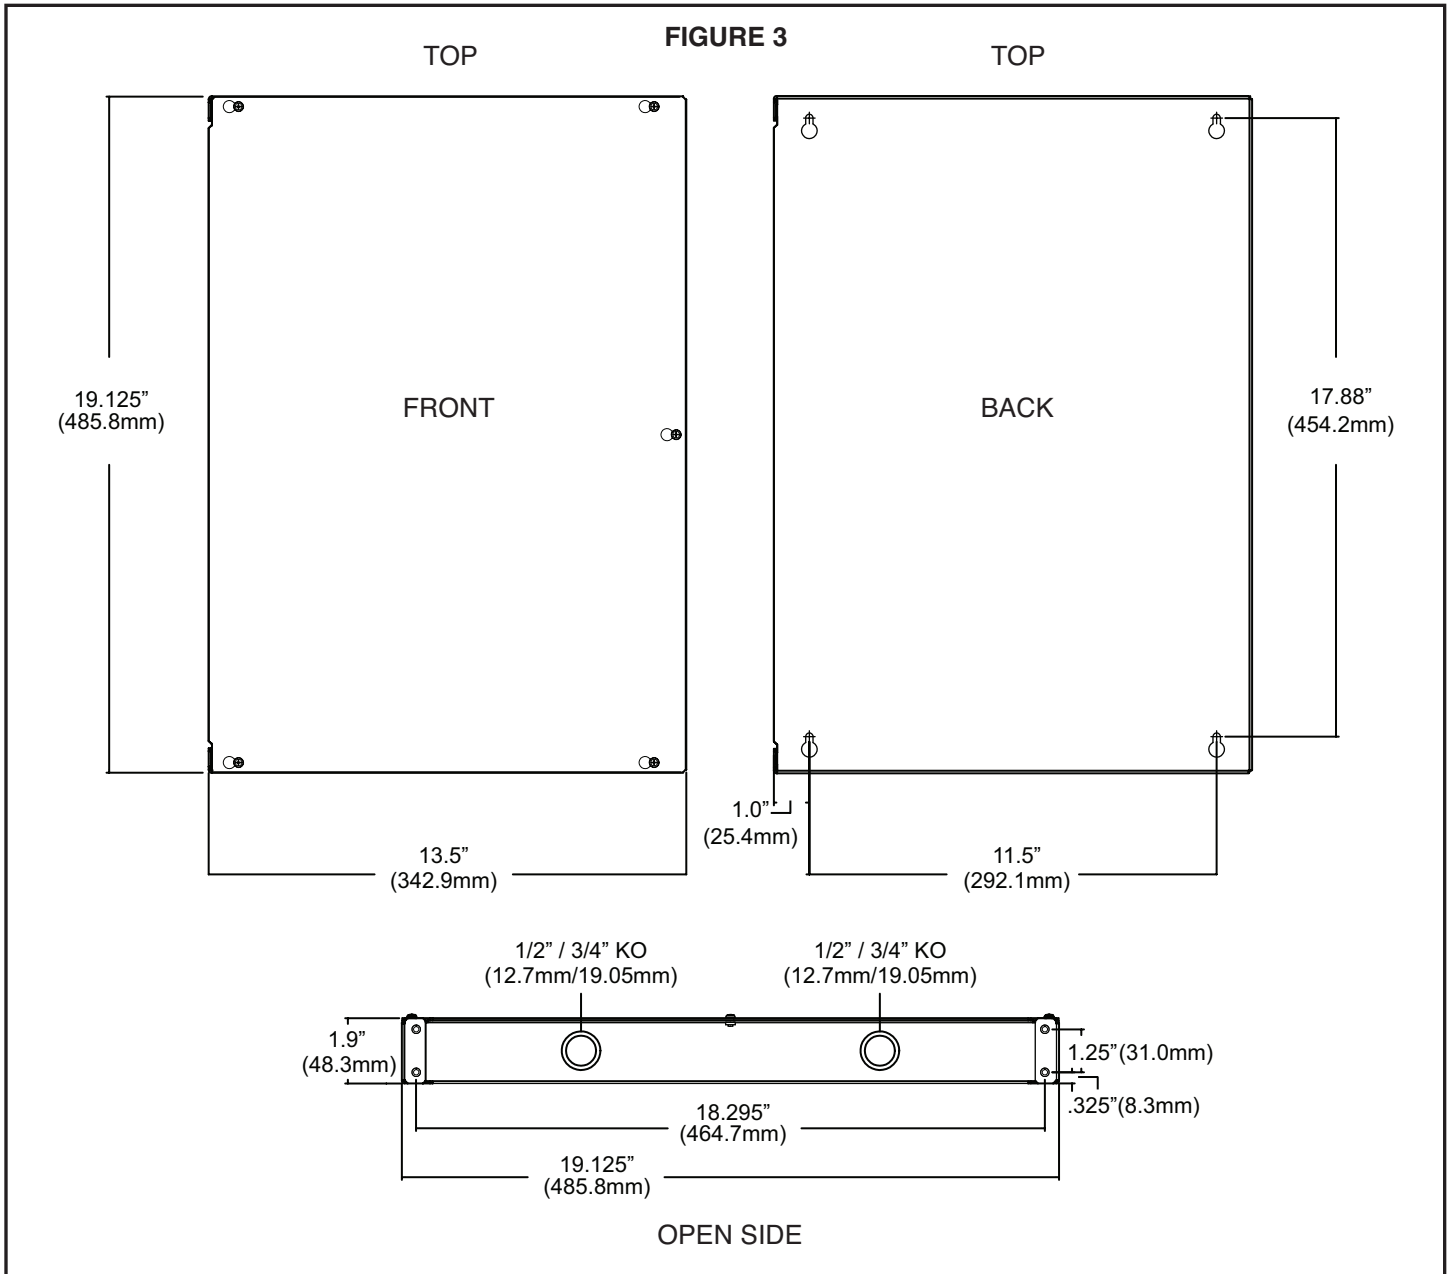

Warranty

LEVITON LIGHTING & ENERGY SOLUTIONS of Leviton Manufacturing Co Inc warrants its Dimmer Systems and Controls to be free of material and workmanship defects for a period of two years after system acceptance or 26 months after shipment, whichever comes first. This Warranty is limited to repair or replacement of defective equipment returned Freight Pre-Paid to **Leviton Lighting & Energy Solutions at 20497 Teton Ave., Tualatin, Oregon 97062, USA. User shall call 1-800-959-6004** and request a return authorization number to mark on the outside of the returning carton, to assure that the returned material will be properly received at Leviton. All equipment shipped back to Leviton must be carefully and properly packed to avoid shipping damage. Replacements or repaired equipment will be returned to sender freight prepaid, F.O.B. factory. Leviton is not responsible for removing or replacing equipment on the job site, and will not honor charges for such work. Leviton will not be responsible for any loss of use time or subsequent damages should any of the equipment fail during the warranty period, but agrees only to repair or replace defective equipment returned to its plant in Tualatin, Oregon. This Warranty is void on any product that has been improperly installed, overloaded, short circuited, abused, or altered in any manner. **Neither the seller nor Leviton shall be liable for any injury, loss or damage, direct or consequential arising out of the use of or inability to use the equipment.** Leviton is not liable for incidental, indirect, special, or consequential damages, including, without limitation, damage to, or loss of use of, any equipment, lost sales or profits or delays or failure to perform this warranty obligation. This Warranty does not cover lamps, ballasts, and other equipment which is supplied or warranted directly to the user by their manufacturer. Leviton makes no warranty as to the fitness for purpose, merchantability or other implied Warranties.

Copyright © 2012
Leviton Manufacturing Company Incorporated.
All Rights Reserved.

For Technical Assistance Call: 1-800-959-6004
www.leviton.com