

Berk-Tek Indoor Plenum Ribbon Cable with Armor-Tek™ (RDPK)



Berk-Tek plenum-rated central tube optical fiber ribbon cable with Armor-Tek™ uses single-mode or multimode, 12- or 24-fiber ribbons, in a dry central tube, surrounded by dielectric strength members and a plenum-rated core cable jacket. Aluminum interlock armor and a plenum-rated armor jacket provide protection to the core cable.

DESCRIPTION

Construction

A fiber optic ribbon is comprised of 12 or 24 fibers coated with a dual acrylate coating system. The fibers are contained in a peelable UV curable matrix material, and the ribbon structure is designed to allow easy separation of the fibers from the matrix in preparation for splicing, or termination to a MPO connector. Ribbons are identified per TIA/EIA-598, and are stacked in a dry central tube, surrounded by two layers of flexible strength members, and an extruded cable jacket, providing tensile strength and crush resistance. Aluminum interlock armor and a plenum-rated armor jacket are added, providing a protective flexible conduit.

Applications

Berk-Tek fiber optic cable is intended for all high-speed data applications, including:



- ETHERNET: 10BASE – 40GBASE (10BASE, 100BASE, 1000BASE, 10GBASE, 40GBASE, 100GBASE, 400GBASE)
- Fibre Channel: 1G-FC – 128GFC (1, 2, 4, 8, 16, 32, 128 GFC)
- SONET: OC-1 – OC-768 (OC -1, 3, 12, 24, 48, 192, 768)
- SDH: STM-0 – STM-256 (STM-0, 1, 4, 16, 64, 256)
- OTN: OTU-1 – OTU4 (OTU1, 2, 2e, 2f, 3, 3e2, 4)
- CPRI: CPRI-1 – CPRI-9 (CPRI-1, 2, 3, 4, 5, 6, 7, 7a, 8, 9)
- PON (SMF only): RFoG, APON, BPON, EPON, GPON, WDM-PON, NG-PON

Features

- The armored design allows for an easy one-pull installation into any environment
- Step-index, single-mode or graded index multimode optical fiber
- Protective UV cured acrylate coating
- Every fiber is subjected to a 0.7 Gpa (100 kpsi) minimum proof stress per TIA-455-31 FOTP-31
- Peelable UV curable matrix material
- Ribbons are easily separated for single fiber splicing if needed
- Two layers of flexible strength members
- Qualified to ICEA S-83-596 and Telcordia GR-409

Benefits

- Eliminate the need for conduit or plenum innerduct by installing interlock armor cable, providing a significant cost savings in both materials and labor
- Installation time can be reduced by as much as 60% versus installing conduit or innerduct
- Interlock armor is part of the cable and not considered conduit for purposes of the NEC fill ratio, allowing for a higher concentration of cables than when using conduit in a given installation area
- Easily interfaced to MT and MPO based connectors, as well as today's newest ribbon connectors
- Mass fusion splicing ribbon cable enables faster project completion and reduced labor costs
- On 144F cables, mass fusion splicing 12F-to-12F requires 92% fewer splices than single fiber-to-fiber splicing
- A single fiber holder can also be used in the mass splicer; no need to worry about multiple machines if a mass splicer is on hand
- Cable design offers excellent mechanical performance with superior crush and flex ratings

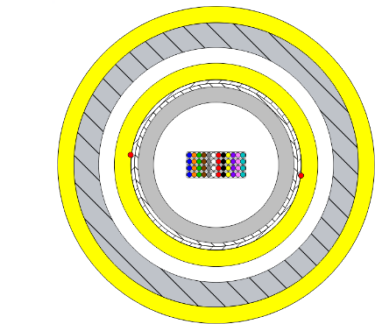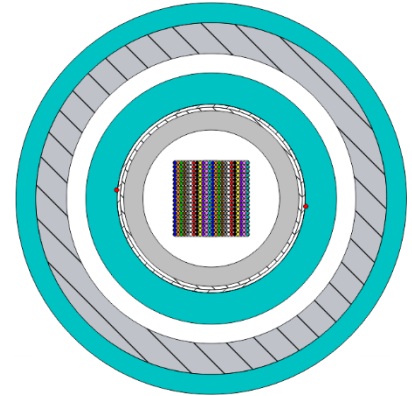

STANDARDS

International EN 50173;
ISO/IEC 11801

National ANSI/ICEA S-83-596;
ANSI/TIA-568.3-D, OFCP FT6,
Telcordia GR-409, NFPA 130

Country of Origin: U.S.A.

Berk-Tek Indoor Plenum Ribbon Cable w/ Armor-Tek™ (RDPK)



TECHNICAL DATA - PHYSICAL						Install		Long Term		Install		Long Term	
Fibers	Product Prefix	Diameter		Weight		Min. Bend Radius				Max. Loading			
		in.	mm	lb/kft.	kg/km	in.	cm	in.	cm	lb	N	lb	N
48	RDPK12B048-M4	0.726	18.4	208	309	7.3	18.4	14.5	36.9	600	2700	200	890
96	RDPK12B096-M4	0.851	21.6	275	409	8.5	21.6	17.0	43.2	600	2700	200	890
144	RDPK12B144-M4	0.951	24.2	338	502	9.5	24.2	19.0	48.3	600	2700	200	890
216	RDPK12B216-M4	0.951	24.2	338	502	9.5	24.2	19.0	48.3	600	2700	200	890
288	RDPK24B288-M4	1.241	31.5	489	727	12.4	31.5	24.8	63.0	600	2700	200	890
432	RDPK24B432-M4	1.241	31.5	489	727	12.4	31.5	24.8	63.0	600	2700	200	890

TECHNICAL DATA											
Fiber Type	Part Number Suffix	Berk-Tek Fiber	Core Size	Wavelength (nm)	Maximum Attenuation (dB/km)	Effective Modal Bandwidth @ 850 nm (MHz.km)	Distance (meters)				Sheath Color
Multimode - Bend Insensitive							1 GbE	10 GbE	40 GbE	100 GbE	
OM3	EB3010/25	EB	50 μm	850/1300	3.0/1.0	2000	1000	300	100	70	Aqua
OM4	FB3010/F5	FB	50 μm	850/1300	3.0/1.0	4700	1040	550	150	100	Aqua
Single-mode Bend Insensitive - ITU-T G.652.D and G.657.A1 Compliant											
OS2	AB0403	Standard for Central Tube Ribbon	8.3 μm	1310/1550	0.4/0.3	N/A	5000	10000	10000	10000	Yellow

MANUFACTURING RELEASE

IMPORTANT NOTICE: This product specification is provided for informational purposes only in order to illustrate typical product constructions, applications and/or methods of installation. Because conditions of actual installation and use are unique and will vary, Berk-Tek makes no representation or warranty as to the reliability, accuracy or completeness of this data, even if Berk-Tek is aware of the product's intended use or purpose. Furthermore, this data does not constitute, nor should it be regarded or relied upon, as professional engineering advice. Installation of product should only be done by qualified personnel and in conformance with all safety, electrical and other applicable codes, standards, rules or regulations. Appropriate and correct product selection, installation and use, and compliance with all such codes, standards, rules and regulations, is a customer/end-user responsibility. Product specifications, standards, programs or services are subject to improvement or changes without notice. Berk-Tek accepts no liability for typographical errors, technical inaccuracies, omissions or misuse of the information contained herein. Changes will be periodically made to address any such issues.