

## How to Uninstall a Relay Card

**Product:** EZ-MAX Plus and Z-MAX Product Families **Article ID:** 100609-RLL/AM-02

**Date:** October 6<sup>th</sup>, 2009

**Summary:** This article explains the proper method for uninstalling relay cards within an EZ-MAX Plus, Z-MAX, and/or Z-MAX Plus relay panel.


### Information:

#### Uninstallation

**Step 1:** Turn off main feed and all branch breakers feeding the relay panel.

**Step 2:** Open relay panel (**Figure 1**).

**Step 3:** Disconnect line and load wire (**Figure 2**).

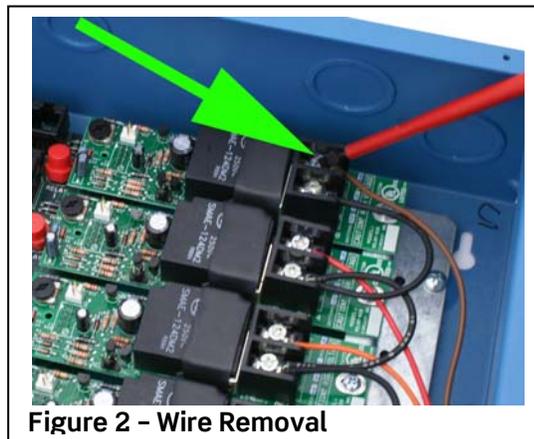

**Step 4:** Mark each wire with a wire tag to ensure wire is installed in proper location when reconnecting (**Figure 3**).

**Step 5:** Install wire cap on each bare wire end while performing the following steps (**Figure 3**).

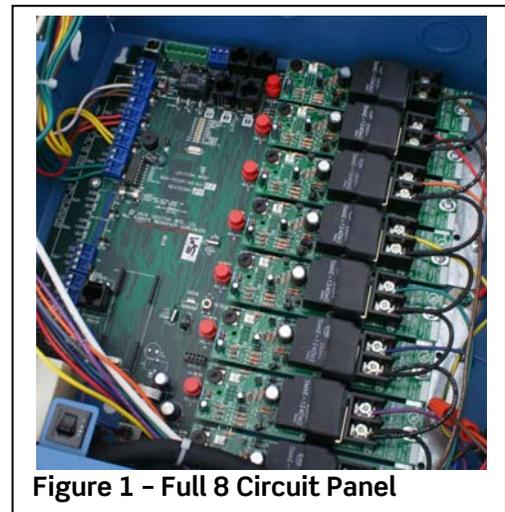


Figure 1 - Full 8 Circuit Panel

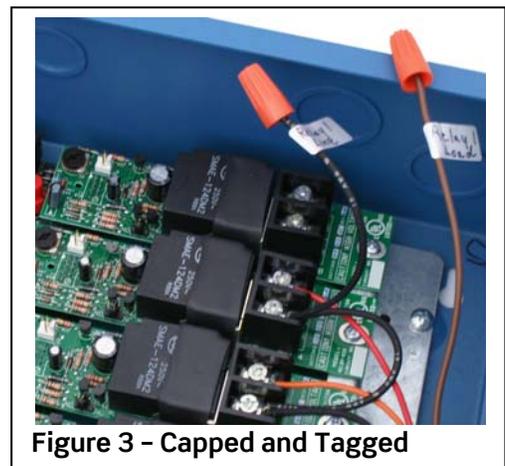


Figure 3 - Capped and Tagged


**Step 6:** Use a screw driver to unfasten the relay card mounting screw (**Figure 4**).

**Step 7:** Remove relay from relay bus card connection by pulling straight out (**Figure 5**).


\*REPEAT steps 3-7 for each additional relay.

**Related Article:**


[How to Install a Relay Card](#)

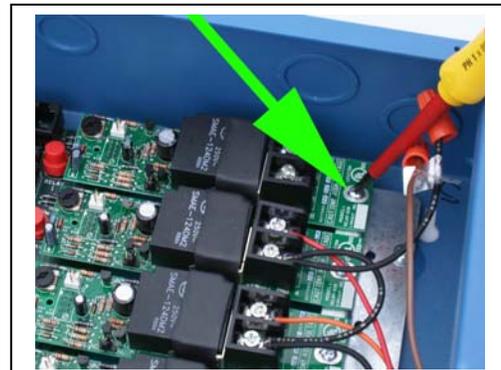

**Figure 4 - Mounting Screw Removal**

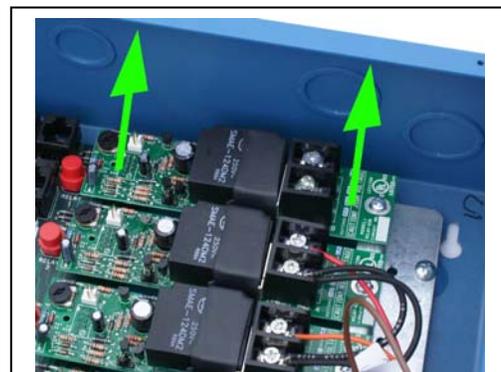

**Figure 5 - Relay Straight Out**

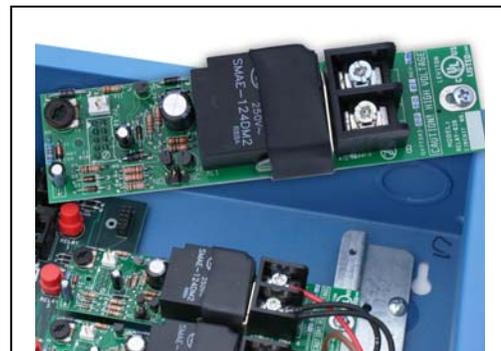

**Figure 6 - Complete**

**Contact:** If you have any questions or concerns, please call LMS technical support at (800) 959-6004.

**Leviton Mfg. Co., Inc. Lighting Management Systems**

20497 SW Teton Avenue, Tualatin, OR 97062 1-800-736-6682 Tech Line: 1-800-959-6004 Fax: 503-404-5594 [www.leviton.com/lms](http://www.leviton.com/lms)  
© 2009 Leviton Manufacturing Co., Inc. All rights reserved. Subject to change without notice.