

# Installation Instructions

## USB-A + USB-C Module


Cat. No. VMAC2

READ THESE INSTRUCTIONS BEFORE INSTALLING.

### Installation Steps

- |  |  |   |
|--|--|---|
| <ol style="list-style-type: none"> <li>1. <b>Meet the family</b></li> <li>2. <b>USB-A + USB-C Module</b></li> <li>3. <b>Features</b></li> <li>4. <b>We are here to help</b></li> </ol> | <ol style="list-style-type: none"> <li>5. <b>Before you install</b></li> <li>6. <b>Base compatibility</b></li> <li>7. <b>Installation</b></li> <li>8. <b>What to do if...</b></li> </ol> | <ol style="list-style-type: none"> <li>9. <b>Safety first</b></li> <li>10. <b>Limited 2 year warranty &amp; exclusions</b></li> </ol> |
|--|--|---|

### 1. Meet the family

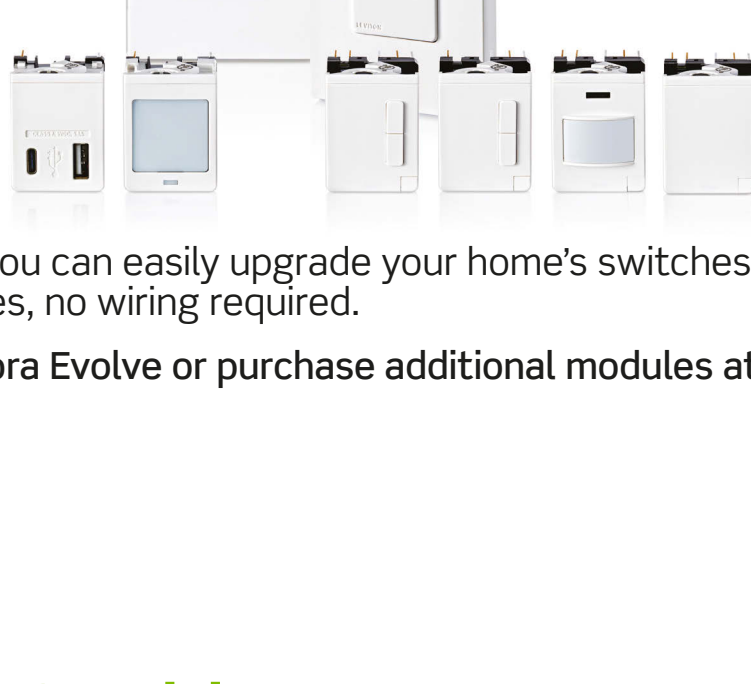


With Decora Evolve™, you can easily upgrade your home's switches and outlets at any time with removable modules, no wiring required.

Learn more about Decora Evolve or purchase additional modules at [leviton.com/evolve](http://leviton.com/evolve)

[Return to top](#)

### 2. USB-A + USB-C Module

Leviton's Decora Evolve USB-A + USB-C Module lets you turn any Decora Evolve base into a USB charger. Easily add USB charging where you need it in your home such as by a bedroom nightstand or at your desk.

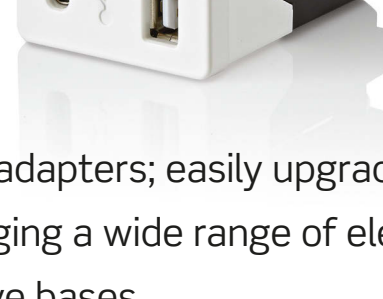

- No more searching for charging adapters; easily upgrade where you need it.
- USB Type-A and Type-C for charging a wide range of electronics.
- Compatible with all Decora Evolve bases.

[Return to top](#)

### 3. Features



**Lever**  
• Use to remove and secure the module.

**USB Type-C charger**  
• Provides 15 watts of charging.

**USB Type-A charger**  
• Provides 10.5 watts of charging.

[Return to top](#)

### 4. We are here to help

- |   |  |
|---|--|
| <p><b>ONLINE</b><br/><a href="http://leviton.com/evolve">leviton.com/evolve</a></p> <p><b>CHAT</b><br/><a href="http://www.leviton.com/support">www.leviton.com/support</a></p> | <p><b>EMAIL</b><br/><a href="mailto:desupport@leviton.com">desupport@leviton.com</a></p> <p><b>CALL</b><br/>1-800-824-3005 (USA)<br/>1-800-405-5320 (Canada)</p> |
|---|--|

Additional self-service support options can be found at [leviton.com/evolve](http://leviton.com/evolve)

[Return to top](#)

### 5. Before you install

- **RISK OF FIRE OR ELECTRIC SHOCK.** For use with Leviton Decora Evolve bases only. The Decora Evolve VMAC2 USB-A + USB-C Module must be installed in a Decora Evolve Single-Pole switch base, Primary switch base, Companion switch base, or Receptacle base.
- One Type-A port and one Type-C port provide a combined total of 5.1A of charging current and 25+ watts of power.
- Charges most Type-A and Type-C USB powered devices.
- Built-in smart chip recognizes the individual device's charging requirements to optimize the charger.
- Overcurrent protection helps protect electronics from receiving too much power, which can damage the device.
- Type-C port permits the cables to be inserted easily in either direction.
- Charging time may be affected by the charge cord used. Leviton recommends using the cord that came with the device you want to charge.
- No data transfer capability.
- For indoor use only.

RATINGS	
Input	125VAC, 60 Hz
USB Rated	5.1A, 25.5W max total
Operating Temperature	32°F to 104°F (0°C to 40°C)
Operating Humidity	10% - 90% non-condensing

[Return to top](#)

### 6. Base compatibility

The USB Module can be installed in any Decora Evolve base.

Compatibility markings can be found on the bases and modules.




**NOTE:** The USB Module can't control a load.

	Receptacle Module works with	Compatibility marking
Single-Pole switch base	✓	□
Primary switch base	✓	◇
Companion switch base	✓	△
Receptacle base	✓	○

[Return to top](#)

### 7. Installation

1. If installing in a switch base, turn the switch OFF before removing the module.
2. Push left side of latch in to pop out the other end.
3. Pull right side of latch to remove.
4. Push module in and secure the latch in flush.

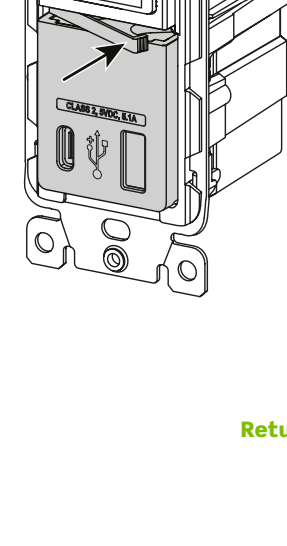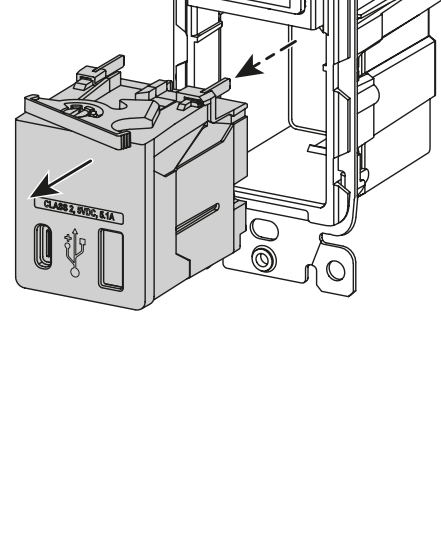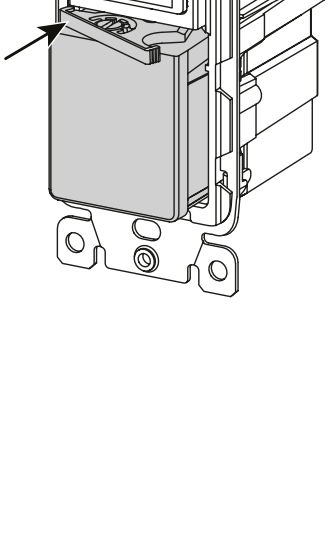

[Return to top](#)

### 8. What to do if...

#### There is no power going to the module:

- For proper operation:
  - Confirm that the switch and receptacle base have the neutral and line wired.
  - The Receptacle base needs a line (hot), neutral, and ground connection.
- Confirm the base is wired properly, and the WHITE conductor is a neutral wire.

#### The module won't insert into the base:

- Check the compatibility marking on the base to make sure it matches the marking on the module.
- Ensure that the blades on the module are not bent.

Visit [leviton.com/evolve](http://leviton.com/evolve) or contact Technical Services for additional help.

[Return to top](#)

### 9. Safety first

#### WARNINGS:

- **RISK OF FIRE OR ELECTRIC SHOCK.** For use with Leviton Decora Evolve bases only. The Decora Evolve VMAC2 USB-A + USB-C Module must be installed in a Decora Evolve Single-Pole switch base, Primary switch base, Companion switch base, or Receptacle base.
- Do not use this separable device with any product other than the one specified on the packaging and in these instructions.
- This is not a toy and is not intended for use by children. For adult use only.
- To be installed and/or used in accordance with electrical codes and regulations.
- For indoor use only.
- If you are unsure about any part of these instructions, consult an electrician.

#### CAUTIONS:

- To be used with Class 2 connectors with interconnecting cables
- The Class 2 USB ports are not intended for use with appliances and supporting products.
- The USB ports are used to charge portable electronic devices ONLY (NO data transfer capability).
- To avoid damage to the product, DO NOT use disinfecting products, including foggers, sprays or other types of atomized cleaning agents. DO NOT spray liquid onto the product. To clean, use a damp cloth with mild soap and dry well. DO NOT use a wet cloth to clean the back of a module.
- Save this instruction sheet. It contains important technical data with testing and troubleshooting information, which will be useful after installation.

[Return to top](#)

### 10. Limited 2 year warranty & exclusions

For Leviton's limited product warranty, go to [www.leviton.com](http://www.leviton.com). For a printed copy of the warranty, call 1-800-824-3005.

#### FOR CANADA ONLY

For warranty information and/or product returns, residents of Canada should contact Leviton in writing at Leviton Manufacturing of Canada ULC to the attention of the Quality Assurance Department, 165 Hymus Blvd, Pointe-Claire (Quebec), Canada H9R 1E9 or by telephone at 1-800-405-5320.

#### FCC CAUTION

Any changes or modifications not expressly approved by Leviton Manufacturing Co., Inc., could void the user's authority to operate the equipment.

#### FCC SUPPLIER'S DECLARATION OF CONFORMITY

Model VMAC2 – Decora Evolve USB-A + USB-C Module is manufactured by Leviton Manufacturing Co., Inc. 201 N. Service Road, Melville, NY 11747. [www.leviton.com](http://www.leviton.com) This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

#### IC STATEMENT

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

#### PATENT STATEMENT

Patents covering this product, if any, can be found on [leviton.com/patents](http://leviton.com/patents)

#### COPYRIGHT AND TRADEMARK INFORMATION

Decora and Decora Evolve are the trademarks of Leviton Manufacturing Co., Inc.; Decora is registered in the U.S., Canada, Mexico and China.

Use of or other third party trademarks, service marks, trade names, brand names and/or product names are for informational purposes only, are/may be the trademarks of their respective owners; such use is not meant to imply affiliation, sponsorship, or endorsement. No part of this document may be reproduced, transmitted or transcribed without the express written permission of Leviton Manufacturing Co., Inc.

Leviton Manufacturing Co., Inc.  
201 North Service Road, Melville, NY 11747  
© 2024 Leviton Manufacturing Co., Inc. All rights reserved.  
Specifications subject to change at any time without notice.

[Return to top](#)