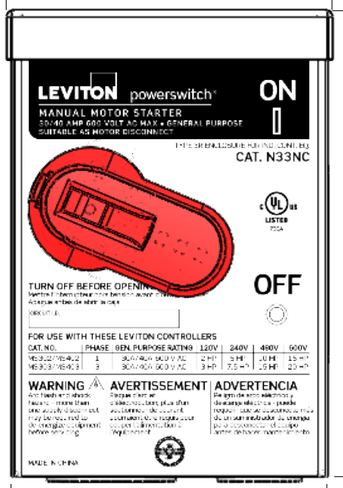

4.30
[109.2]

6.15
[156.2]

4.17
[105.9]

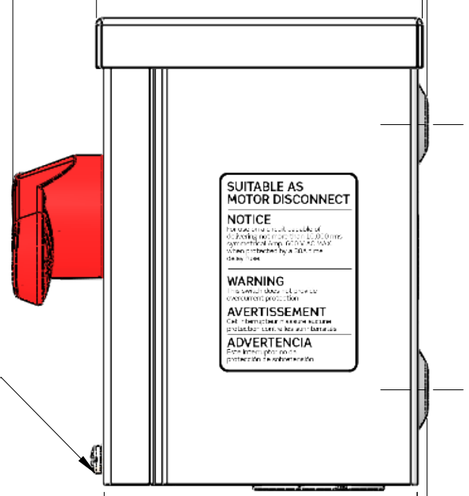

5.40
[137.2]

4.30
[109.2]

0.07 (4 PL)
[1.7]

0.130 (4 PL)
[3.30]

4.13
[104.9]

#10-32 SCREW,
ZINC PLATED STEEL

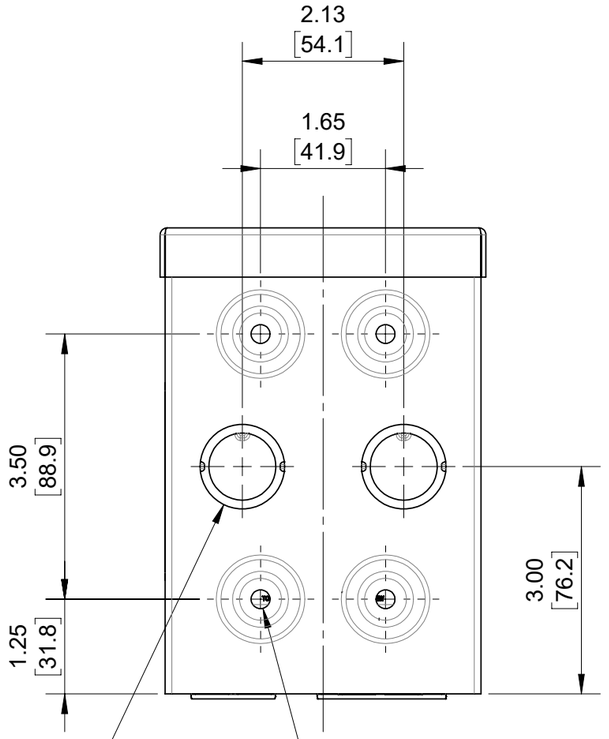

2.13
[54.1]

1.65
[41.9]

3.50
[88.9]

1.25
[31.8]

3.00
[76.2]

∅0.25 MOUNTING HOLE (4 PL)
[6.4]

1/2" & 3/4"
KNOCKOUTS (2 PL)

COVER, STEEL
WITH GRAY POLYESTER
POWDER COATED FINISH

LOWER ENCLOSURE, STEEL
WITH GRAY POLYESTER
POWDER COATED FINISH

HANDLE

1/2", 3/4", 1",
& 1-1/4"
KNOCKOUTS

1/2" & 3/4" KNOCKOUTS

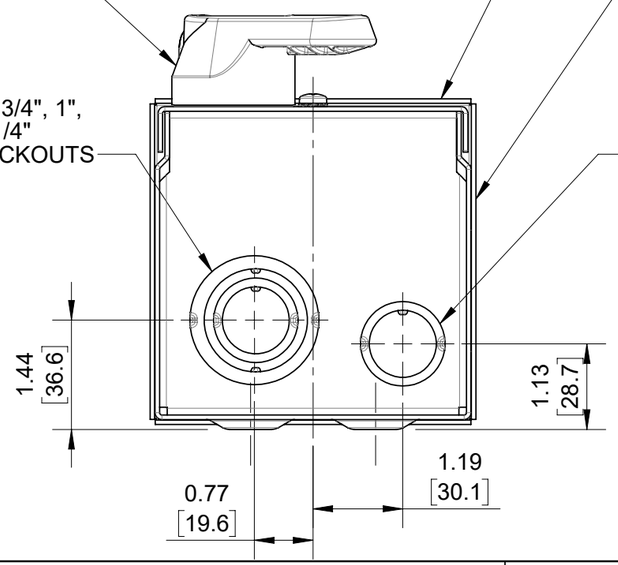

1.44
[36.6]

1.13
[28.7]

1.19
[30.1]

0.77
[19.6]

NOTES:

1. UPPER DIMENSIONS ARE IN INCHES.
   LOWER DIMENSIONS ARE IN MILLIMETERS.

TYPE 3R METAL ENCLOSURE CATALOG NUMBERS

CATALOG NUMBER	DESCRIPTION
CAT. #N33NC-0DS	TYPE 3R METAL ENCLOSURE FOR 30A & 40A MOTOR STARTER SWITCH
CAT. #N3302-0DS	TYPE 3R METAL ENCLOSURE WITH 30A 2-POLE (1∅) MOTOR STARTER SWITCH
CAT. #N3303-0DS	TYPE 3R METAL ENCLOSURE WITH 30A 3-POLE (3∅) MOTOR STARTER SWITCH

UNLESS OTHERWISE SPECIFIED:
DO NOT SCALE DRAWING.
ALL DIMENSIONS ARE IN INCHES.
ALL ANGLES ARE IN DEGREES.

TOLERANCES

INCH	METRIC
.XX ± .01	.X ± .2 mm
.XXX ± .005	.XX ± .1 mm

ANGLES: ± 1/2°

THIRD ANGLE PROJECTION

ALL PRINTED COPIES ARE UNCONTROLLED

LEVITON

TITLE:
TYPE 3R ENCLOSURE
FOR 30/40A MMS SWITCH

DWG NO.
CATSTD-N33NC-0DS-D01

SIZE	SCALE:1:1	SHEET 1 OF 1	REV
B			A

Copyright 2019. Unpublished. All Rights Reserved.