



## Infrared Remote Control

Cat. No. NE210

For use with Leviton  
Infrared Receiving Devices

## INSTRUCTIONS

DI-000-NE210-00A

### LIMITED 2 YEAR WARRANTY AND EXCLUSIONS

Leviton warrants to the original consumer purchaser and not for the benefit of anyone else that this product at the time of its sale by Leviton is free of defects in materials and workmanship under normal and proper use for two years from the purchase date. Leviton's only obligation is to correct such defects by repair or replacement, at its option, if within such two year period the product is returned prepaid, with proof of purchase date, and a description of the problem to **Leviton Manufacturing Co., Inc., Att: Quality Assurance Department, 59-25 Little Neck Parkway, Little Neck, New York 11362-2591**. This warranty excludes and there is disclaimed liability for labor for removal of this product or reinstallation. This warranty is void if this product is installed improperly or in an improper environment, overloaded, misused, opened, abused, or altered in any manner, or is not used under normal operating conditions or not in accordance with any labels or instructions. There are no other or implied warranties of any kind, including merchantability and fitness for a particular purpose, but if any implied warranty is required by the applicable jurisdiction, the duration of any such implied warranty, including merchantability and fitness for a particular purpose, is limited to two years. Leviton is not liable for incidental, indirect, special, or consequential damages, including without limitation, damage to, or loss of use of, any equipment, lost sales or profits or delay or failure to perform this warranty obligation. The remedies provided herein are the exclusive remedies under this warranty, whether based on contract, tort or otherwise.

For Technical Assistance Call:  
1-800-824-3005 (U.S.A. Only)  
[www.leviton.com](http://www.leviton.com)



DI-000-NE210-00A

## FEATURES

- Handheld remote for easy lighting control.
- Works up to 40 feet away from Infrared receiving device.
- Red LED on the front lights to indicate operation.

## INTRODUCTION

The Leviton Infrared Remote Control, Cat. No. NE210, allows easy control of a Leviton Lighting System up to 40 feet from a Leviton Infrared-Receiving Device. The Remote Control has eight (1-8) Scene Presets, Group DIM, Group BRIGHT, MAX and OFF to provide simple control of Leviton's Lighting Systems (**refer to Figure 1**).

## DESCRIPTION

The Remote Control has a user-friendly design to ensure comfortable hand-held usage. It is a component of a Leviton Lighting System and provides remote user control of the lights when used in conjunction with a Leviton Infrared-Receiving Device. The Remote provides the ability to call preset scenes for the Lighting System. The Remote uses four AAA batteries\*.

\*Batteries not included

## TO OPERATE

Open back cover of the Remote Control (**refer to Figure 2**). Insert batteries ensuring proper polarity. Close back cover. Remote should be pointed in the direction of the Infrared receiving device and no more than 40 feet away.

**SCENES 1-8:** Press button 1, 2, 3, 4, 5, 6, 7, or 8. The lights will fade ON to a user programmable preset scene level.

**MAX:** Press the MAX button. The lights will fade ON to FULL BRIGHT.

**GROUP BRIGHT:** Press and hold ^ button. The lights for the entire scene will BRIGHTEN.

**GROUP DIM:** Press and hold v button. The lights for the entire scene will DIM.

**OFF:** Press the OFF button. The lights will fade to OFF.

**NOTE:** If you are using this Remote with a Learning IR (D3206/8 or NE505), you must program the IR Remote. Refer to Instruction Sheets for those Cat. Nos. for programming.

## TROUBLESHOOTING

- If the LED does not light when button is pressed; there is no power
  - Check Batteries.
- If the LED does light
  - check that the IR Receiving enabled device is installed properly, powered and functioning (**refer to the specific IR Receiving Device Instruction Sheets**).
  - IR Receiving enabled device may need to be reprogrammed with IR Remote.

Figure 1 - Remote Control Top


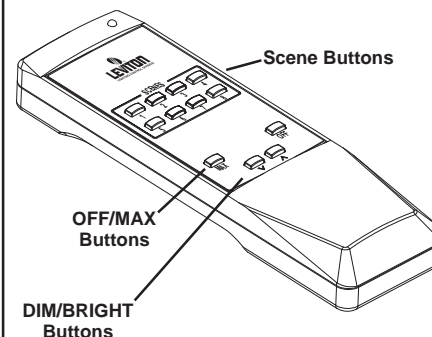


Figure 2 - Remote Control Bottom

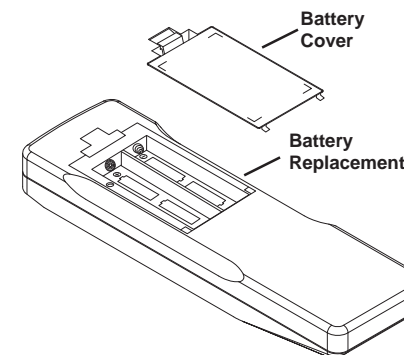

WEB VERSION