


Intellect™ Sensor Control Module

Use with Intellect Integrated Fixture Control System

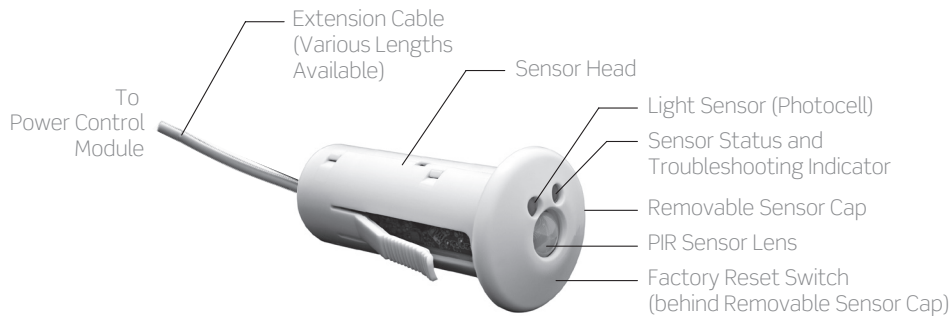

Description

The Leviton Intellect™ Sensor Control Module (SCM) is designed to be mounted directly into lighting fixtures for use in an Intellect Integrated Fixture Control System. The SCM integrates PIR occupancy sensing and photocell technology in a single compact unit. Integrate with down lights, track fixtures and other general lighting to create an advanced intelligent lighting system that complies with energy codes.

The Leviton Intellect Integrated Fixture Control System is made up of three interchangeable components. A range of options are available to meet the specific needs of each lighting fixture type:

- **Sensor Control Module**—wirelessly communicates to all other wireless devices within the room
- **Power Control Module**—receives commands from the Sensor Control Module and provides relay power control
- **Keypad Room Controller**—acts as the primary user interface and coordinates all the functions within the room; provides the Bluetooth® interface for connection to the Intellect App

App Configuration

Fixtures are wirelessly configured, monitored and controlled as part of the system they are connected to using that system's configuration app which operates on an Android or iOS device.

Applications

- Integrating wireless occupancy, vacancy and light level sensing technology into fixtures
- Wireless lighting control systems
- Intelligent fixture control


Applications (Continued)

- Creating Intellect-enabled light fixtures
- Integrated, intelligent fixture controls
- Primary fixture types: downlights, linear fixtures with deep cavities (direct/indirect, cylinders)
- Luminaire level lighting control


Features

- Occupancy and vacancy detection: PIR sensor, spacing to mounting height of 1:1 up to 12'
- Light level detection: light sensor (photocell)
- Diagnostic LEDs: may be disabled
- Integrated factory default and test button
- Connects to any Intellect power supply or Power Control Module
- Removable sensor cap for field painting to match environment; arrives white from factory
- Installs into any 7/8" +/- 1/8" diameter mounting hole; suitable for metal, drywall, ceiling tiles and related surfaces (requires top access for removal)
- Fully digital sensors, configurable across network
 - Sensitivity
 - Time out
 - Lighting target level
 - Occupancy/vacancy mode
 - Exclude sensor
- See system data sheet for full features
- Test switch under removable cap for toggling load ON/OFF, factory default, and pushbutton pairing when other methods are unavailable
- Intellect products are listed on the DesignLights Consortium® (DLC) Qualified Product List (QPL) when used as part of a GreenMAX DRC System

Dimensions Diagram

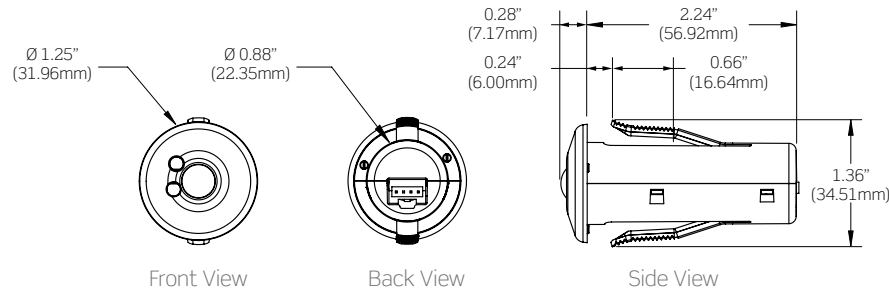

Field-of-View Diagram

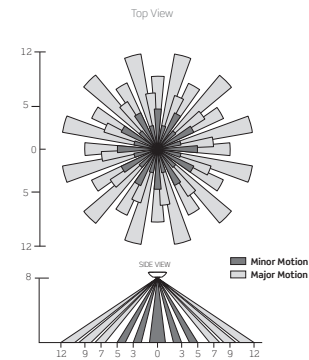

* 3D models available upon request.

Specifications

Electrical	
Input Power	Powered from Intellect Power Control Module
Wireless	Wireless IEEE 802.15.4, 2.4 GHz mesh network
Range	Up to 75' between nodes
Environmental	
Operating Temperature Range	32° to 122° F (0° to 50° C)
Storage Temperature Range	-4° to 185° F (-20° to 85° C)
Relative Humidity	0 to 90% non-condensing, for indoor use only
Mounting Height	8-12'
Other	
Intellect Energy Codes	Can be used to comply with IECC, ASHRAE 90.1 and 2022 Title 24, Part 6 dimming, occupancy/vacancy sensing and daylight harvesting requirements
Intellect System Listings	UL/cUL Listed, UL924, NOM Certified, RoHS 2 Compliant, and IEC61000-4-2, Complies with IEEE 802.15.4, UL916 standard for energy management equipment, UL2043 for plenum rated, listed on the DesignLights Consortium® (DLC) Qualified Product List (QPL) when used as part of a GreenMAX DRC System
Radio Certifications	FCC certified for wireless communication (U.S.), FCC ID: 2473A-PVDIM, IC Certified (Canada), IC ID: 2473A-PVDIM
Warranty	Limited 5-Year

Ordering Information

Intellect PIR Sensor Control Module	
Cat. No.	Description
ZL00J-D0W	Intellect PIR Sensor Control Module with Integrated Photocell for mounting in 1/2"-2" rigid or flexible ceiling. Requires Intellect Power Control Module. White finish with white paintable trim ring. Available as a bulk pack, 30/carton, or unit packs
ZLAEX-012	Extension Cable, for use between Intellect Sensor and Intellect Power Control Module, 12"
ZLAEX-018	Extension Cable, for use between Intellect Sensor and Intellect Power Control Module, 18"
ZLAEX-024	Extension Cable, for use between Intellect Sensor and Intellect Power Control Module, 24"
ZLAEX-030	Extension Cable, for use between Intellect Sensor and Intellect Power Control Module, 30"

Leviton Manufacturing Co., Inc. Lighting & Controls

10385 SW Avery Street, Tualatin, OR 97062 **tel** 800-736-6682 **tech line** (6:00AM-4:00PM PT Mon-Fri) 800-959-6004

Leviton Manufacturing Co., Inc. Global Headquarters

201 North Service Road, Melville, NY 11747-3138 **tel** 800-323-8920 **tech line** (8:00AM-10:00PM ET Mon-Fri, 9:00AM-7:00PM ET Sat, 9:00AM-5:00PM ET Sun) 800-824-3005

Visit our Website at: www.leviton.com/intellect

©2024 Leviton Manufacturing Co., Inc. All rights reserved. Subject to change without notice.

G-9669H/F24-mm
REV JUN 2024