LEVITON ®
Network Solutions

49455-48B, FLPBE-4EB

Front Loading UTP QUICKPORT™ Patch Panel

APPLICATION

Front Loading UTP QUICKPORT Patch Panels are compatible with all QUICKPORT connectors to maximize versatility with a variety of media applications and enable easy upgrades. The panel fits all industry-standard 19-inch racks and cabinets, and supports jack loading from the front or rear of the panel; ideal when rear panel access is limited.

Patch Panel

Bezel (not to scale)

SPECIFICATION

Front Loading Patch Panel shall be comprised of a metal panel with a black powder coat finish with silk screen port numbers above each port. The panel shall be offered in a 48-port 2RU configuration. The panel shall include 48 high-impact thermoplastic front-loading bezels made from UL 94V0 rated material. Bezels shall accept all Leviton QUICKPORT connectors. Bezels shall be individually removable from the patch panel allowing single port installation or replacement from the panel front. When installed in the panel, bezels allow for rear jack installation without bezel removal. The panel provided two mounting positions for a rear cable management bar. A single rear mounting bar shall be included with the panel. Panel shall be ANSI/TIA-568 compliant and c(UL)us Listed.

FEATURES & BENEFITS

- Mounts on 19-inch equipment racks
- 2 rack unit 48-port panel
- Supports jack installation from the front or rear; ideal for hard to access applications
- Vertical port numbers mimic switch numbering
- Includes one tool-free mounting rear cable management bar and supports an optional second bar (sold separately, 49005-CMB)
- Accepts all QUICKPORT-style connectors (sold separately)
- Boxed and packaged in Sustainably Smart Packaging

STANDARDS & REGULATIONS

- ANSI/TIA-568
- c(UL)us Listed

MECHANICAL SPECIFICATIONS

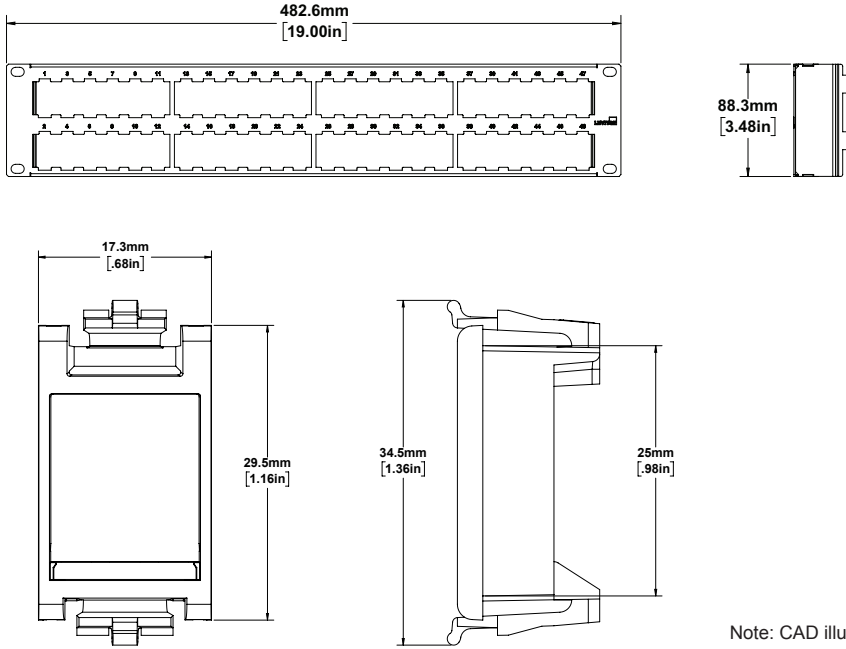|	
Dimensions:	See page two
Materials:	18-gauge steel; high-impact, fire-retardant plastic
Capacity:	48-port
Mounting:	19-inch rack mount
Color:	Black
Temp.(Storage):	-40 ℃ to +70 ℃ (-40 ℉ to +158 ℉)
Temp.(Operating):	-10 ℃ to +60 ℃ (+14 ℉ to +140 ℉)
Humidity (Max.):	95% relative humidity, non-condensing

COUNTRY OF ORIGIN

China

WARRANTY INFORMATION

For Leviton product warranties, go to Leviton.com/ns/warranty

I24 SS1163-GL ENv2
Revised September 2024

LEVITON®
Network Solutions

482.6mm
[19.00in]

88.3mm
[3.48in]

17.3mm
[.68in]

29.5mm
[1.16in]

34.5mm
[1.36in]

25mm
[.98in]

Note: CAD illustrations are not to scale

PART NUMBER	
Description	**Part No.**
Front Loading UTP QUICKPORT™ Patch Panel with vertical numbering, 2RU, 48-port, black	49455-48B
4-Pack Front-Loading Panel Bezel Replacements	FLPBE-4EB

For further support information, visit Leviton.com/ns/support

USA
Network Solutions Headquarters
+1 (800) 722 2082
infoUSA@leviton.com

Leviton Cable (formerly Berk-Tek)
+1 (800) 237 5835 | infoUSA@leviton.com

Asia Pacific
+852 3620 2602
infoAPAC@leviton.com

Canada
+1 (800) 461 2002
infoCanada@leviton.com

Europe
+44 (0) 1592 772124
infoEurope@leviton.com

Latin America
MX: +52 (55) 2128 6286
LATAM: +52 (55) 2333 5963
infoLATAM@leviton.com

Middle East & Africa
+971 (4) 247 9800
infoMEA@leviton.com

NETWORK SOLUTIONS PRODUCTS ARE AVAILABLE WORLDWIDE IN OVER 100 COUNTRIES. VISIT US ONLINE AT LEVITON.COM/NS TO LEARN MORE.

I24 SS1163-GL ENv2
Revised September 2024