


## 8-Port PoE Network Switch

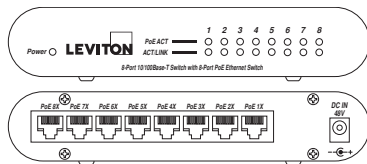

User Guide

## WARNINGS AND CAUTIONS

- Read and understand all instructions. Follow all warnings and instructions marked on the product.
- Do not use this product near water - e.g., near a tub, wash basin, kitchen sink or laundry tub, in a wet basement, or near a swimming pool.
- Never push objects of any kind into this product through openings, as they may touch dangerous voltages.
- Never install communications wiring or components during a lightning storm.
- Never install communications components in wet locations unless the components are designed specifically for use in wet locations.
- Never touch uninsulated wires or terminals unless the wiring has been disconnected at the network interface.
- Use caution when installing or modifying communications wiring or components.
- SAVE THESE INSTRUCTIONS.

## FCC Compliance

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

## CE Mark Warning:

This is a Class B product. In a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures.

## UL Warning:

- 1) Elevated Operating Ambient Temperature - If installed in a closed or multi-unit rack assembly, the operating ambient temperature of the rack environment may be greater than room ambient. Therefore, consideration should be given to installing the equipment in an environment compatible with manufacturer's maximum rated ambient temperature.
- 2) Reduced Air flow - installation of equipment in a rack should be such that the amount of air flow required for safe operation of the equipment is not compromised.
- 3) Mechanical Loading - mounting of the equipment in the rack should be such that hazardous conditions are not achieved due to uneven mechanical loading.

## Table of contents

- Introduction .....page 4
- Power Over Ethernet (PoE) .....page 5
- Installation .....page 6
- Connecting Network Cables .....page 7
- Rear Panel Ports .....page 8
- Rear Panel Power Jack .....page 9
- Front Panel LED Indicators .....page 10
- Technical Specification .....page 11,12

## Introduction

The 91A00-1 combines a small, high efficiency 8-Port 10/100Mbps Ethernet switch with IEEE 802.3af Power over Ethernet (PoE) capability on all 8 ports. It can be used to provide power to up to 7 Leviton OmniTouch 7 Touchscreens (one port must be connected to the network).

The 91A00-1 is a Power Source Equipment (PSE) device that is fully compatible with Powered Devices (PD) that comply with the IEEE 802.3af standard. The PoE ports on the 91A00-1 can also be used to power other Powered Devices (PD), such as the Leviton Home Theater Extender, PoE IP cameras, PoE Wireless Access Points, PoE Printer, etc.) without requiring additional power on the network. Each of the PoE ports can provide 15.4 Watts of power as well as 10/100M data transmission through the traditional UTP cable to the Powered Device.

The 91A00-1 is supplied with an external 48VDC power adaptor. No configuration is required and installation is quick and easy. Support for automatic MDI / MDI-X on all of the ports eliminates the need for a crossover connection to another switch or hub. Auto-negotiation on each port senses the link speed (100 Mbps or 10 Mbps) of a network device and intelligently adjusts for compatibility and optimal performance.

**NOTE:** This device is designed for indoor use. Do not use outdoors.

## Power over Ethernet (PoE)

### Power over Ethernet (PoE):

Power over Ethernet (PoE) integrates 48V power and data onto one single cable, eliminating the need to have power available at all equipment locations. Power and data are integrated onto the same cable, up to 100 meters (328 feet).

### Features:

- 8 x 10/100Mbps Auto-negotiation Ethernet RJ-45 ports with PoE on all 8 ports
- Compliant with IEEE 802.3af specification
- Supports PoE power, up to 112W total, for all 8 ports
- Supports PoE IEEE802.3af compliant Powered Device (PD)
- Each port supports automatic MDI/MDIX, so there is no need to use crossover cables
- Full/half duplex transfer mode for each port
- Wire speed reception and transmission
- Up to 1000 unicast address entities per device, self-learning, and table aging
- 64K Byte packet buffer

## Installation

### Unpacking

Open the shipping cartons of the 91A00-1 and carefully unpack its contents:

- 91A00-1 8-Port PoE Network Switch
- AC power adaptor
- User's Guide

### Installation:

Install the 91A00-1 as follows:

- The surface must support at least 4.4 lb and a power outlet should be within 6 feet of the switch
- Visually inspect the DC power jack and make sure that is fully secured to the power adaptor
- Make sure that there is proper heat dissipation from and adequate ventilation around the switch

**NOTE:** Do not place heavy objects on the switch.

## Connecting Network Cables

### Connecting Network Cables

The 91A00-1 has 8 10/100Mbps Ethernet ports. Each port incorporates 10/100Mbps support using traditional UTP cables. Each of the 8 PoE ports will automatically activate when a compatible device is identified. The 91A00-1 will supply power through the port to the connected PoE device (PD).

Legacy devices that are not compatible will not be supplied power. This feature allows users to freely and safely mix legacy and PoE compatible devices connected to switch.


This Switch supports 10Mbps Ethernet or 100Mbps Ethernet and runs both in half and full duplex mode using two pairs of cable.

All ports are automatic MDI type ports. The switch can auto negotiate to MDI or MDI-X type, so you can connect either a standard network or crossover cable.

When connecting an OmniTouch 7 to the network, a Cat-5 (4-pair) cable is required for operation. Run the Cat-5 cable between the location of the 91A00-1 and the location of the OmniTouch 7.

## Rear Panel

There are 8 RJ-45 ports and one DC power jack on the rear panel of the 91A00-1.



### Ports:

PoE Ports: PoE1X to PoE8X

- All ports are 10/100Mbps as well as 802.3af PoE enabled ports.
- All ports will automatically activate when a compatible PoE device is identified. The 91A00-1 will supply power through the Ethernet port to the connected PoE device (PD).
- The 91A00-1 also supports legacy devices that are not PoE compatible. In this case, the PoE ports will not supply power to those devices. This feature allows users to freely and safely connect legacy and PoE compatible devices to the switch.

### DC Power Jack:

The DC power jack is located on the right side of the rear panel of the 91A00-1.

Use only the supplied AC power adaptor. The use of any incompatible adaptor may cause damage to the equipment and void the warranty.


The 91A00-1 does not include a power switch. Plugging its power adaptor into a power outlet will immediately power it on.



## Front Panel

### LED Indicators:

The LED indicators provide instant status and helps you monitor and troubleshoot when required.



<b>Power LED</b>	<b>LED on:</b> Power ON / <b>LED off:</b> Power off.
<b>LINK/ACT</b>	<b>LED on:</b> this port is Linked and Active <b>LED off:</b> this port is not correct Link or inactive
<b>PoE (1x - 8x)</b>	<b>LED on:</b> The PoE power device (PD) is connected and the port is supplying power. <b>LED off:</b> no PoE power device (PD) connected

## Technical Specifications

Standards	IEEE 802.3 10BASE-T Ethernet IEEE 802.3u 100BASE-TX Fast Ethernet IEEE 802.3x Full Duplex Flow Control IEEE 802.3af Power over Ethernet
Protocol	CSMA/CD
Data Transfer Rate	Ethernet: 10Mbps (half-duplex), 20Mbps (full-duplex) Fast Ethernet: 100Mbps (half-duplex), 200Mbps (full-duplex)
Network Cables	10BASE-T: 2-pair UTP Cat 3, 4, 5 up to 100 meters 100BASE-Tx: 2-pair UTP Cat 5, 5e up to 100 meters
Number of Ports	8 x 10/100Mbps RJ-45 ports with 8 PoE enabled ports
PoE power on RJ-45	Power + : pin 3 & pin 6 : Power - : pin 1 & pin 2
AC power adaptor	Input: 110V ~ 220VAC, 50Hz - 60Hz Output: 48VDC, 2.5A (8 PoE port)

## Technical Specification (continued)

Power Consumption	6.4 watts, maximum (with no Powered Devices connected) 112 watts (8 PoE ports fully load)
Temperature	Operation: 0°C - 40 °C (32°F - 104 °F) Storage Temperature: -10°C - 70 °C (14°F - 158 °F)
Humidity	Relative Humidity: 5% - 95%
Dimensions	16cm W x 9.4cm D x 2.1cm H
EMI	FCC Class B, CE Mark Class B
Safety	48VDC Power Adaptor UL listed
RAM buffer	64K bytes per device
Filtering Address Table	1000 entries per device
Packet Filtering/ Forwarding Rate	10Mbps Ethernet: 14,880/pps 10Mbps Ethernet: 148,800/pps
MAC Address	Automatic update
Transmission Method	Store – and - forwarder



**TRADEMARK DISCLAIMER:** Use herein of third party trademarks, service marks, trade names, brand names and/or product names are for informational purposes only, are/may be the trademarks of their respective owners; such use is not meant to imply affiliation, sponsorship, or endorsement.

**PATENTS:** Licensed under one or more of the following U.S. Patent Numbers: 7,457,250; 8,902,760; and 9,019,838.

**FOR CANADA ONLY:** For warranty information and/or product returns, residents of Canada should contact Leviton in writing at Leviton Manufacturing of Canada Ltd to the attention of the Quality Assurance Department, 165 Hymus Blvd, Pointe-Claire (Quebec), Canada H9R 1E9 or by telephone at 1 800 405-5320.

#### LEVITON LIMITED WARRANTY

Leviton warrants to the original consumer purchaser and not for the benefit of anyone else that products manufactured by Leviton under the Leviton brand name ("Product") will be free from defects in material and workmanship for the time periods indicated below, whichever is shorter: • **OmniPro II and Lumina Pro:** three (3) years from installation or 42 months from manufacture date. • **Omni LTE, Omni IIe, and Lumina:** two (2) years from installation or 30 months from manufacture date. • **BitWise Controllers, Accessories:** two (2) years from installation or 30 months from manufacture date. • **Lumina Gateway Controllers:** two (2) years from installation or 30 months from manufacture date. • **Thermostats, Accessories:** two (2) years from installation or 30 months from manufacture date. • **Batteries:** Rechargeable batteries in products are warranted for ninety (90) days from date of purchase. **Note:** Primary (non-rechargeable) batteries shipped in products are not warranted. **Products with Windows® Operating Systems:** During the warranty period, Leviton will restore corrupted operating systems to factory default at no charge, provided that the product has been used as originally intended. Installation of non-Leviton software or modification of the operating system voids this warranty. Leviton's obligation under this Limited Warranty is limited to the repair or replacement, at Leviton's option, of Product that fails due to defect in material or workmanship. Leviton reserves the right to replace product under this Limited Warranty with new or remanufactured product. **Leviton will not be responsible for labor costs of removal or reinstallation of Product.** The repaired or replaced product is then warranted under the terms of this Limited Warranty for the remainder of the Limited Warranty time period or ninety (90) days, whichever is longer. This Limited Warranty does not cover PC-based software products. **Leviton is not responsible for conditions or applications beyond Leviton's control. Leviton is not responsible for issues related to improper installation, including failure to follow written Installation and operation instructions, normal wear and tear, catastrophe, fault or negligence of the user or other problems external to the Product.** To view complete warranty and instructions for returning product, please visit us at [www.leviton.com](http://www.leviton.com).