


DDS 6000+ Series Satellite Dimmer Pack, Sinking Control



DESCRIPTION

The DDS 6000+ Satellite Dimmer controls 2-wire, phase controlled dimming loads from any 1-10V sinking controller and offers a reliable, responsive performance with smooth, accurate dimming curves. Extensive epoxy encased toroidal filtering reduces the potential of dimmer generated noise. Individual channels are user assignable as dimmers or ON/OFF relays for non-dim applications. All DDS Dimmers have built-in chase effects for stand-alone operation, perfect for all display type applications.

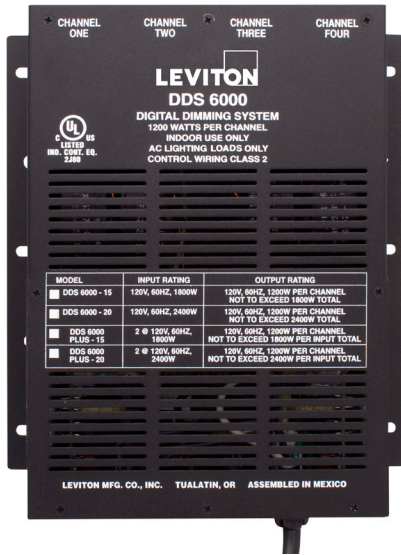

DIMENSIONAL DATA	
Width	9.5" (24.1cm)
Depth	3.75" (9.5cm)
Height	10.9" (27.7cm)
Shipping Weight	15lbs (6.8kg)

FEATURES

- 4 individual dimmers
- Microprocessor digital phase control dimming
- 512 channel address capable
- User select for soft start operation to increase lamp life
- User select for 8 auto sequence control programs
- Sequence rate adjustable from 1 to 60 seconds
- Toroidal noise reduction
- Dual SCR circuit design ensures reliable operation
- Control status indicator LED
- Power on LED indicator
- Individual channel function LEDs
- External fusing for each individual channel
- NSI 128 channel Micro-Plex (3-pin XLR male and female)
- 1-10V analog input (5-pin DIN) sinking control

APPLICATIONS

- Phase control dimming from GreenMAX® Dimming Relays
- Phase control dimming/daylight harvesting from Integrated Room Control (IRC)
- Phase control dimming/daylight harvesting from Provolt™ Photocell (PCC1D-00W)
- Phase control dimming/daylight harvesting from 1-10V Low Voltage Photocell (ODCOP-D0W)

DDS Series Satellite Dimmer Pack, Sinking Control


PRODUCT DATA




SPECIFICATIONS

- 4 channels @ 1200 watts, phase control dimming
- (2) 20A, 12V input circuits
- 4800 watts maximum output
- 400 micro-second toroidal filtering

DIMENSIONS

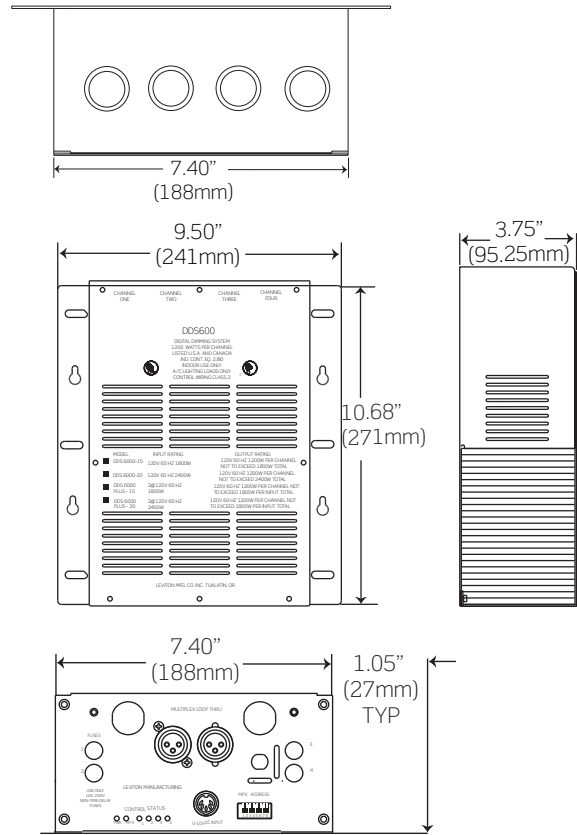

WIRING DIAGRAM

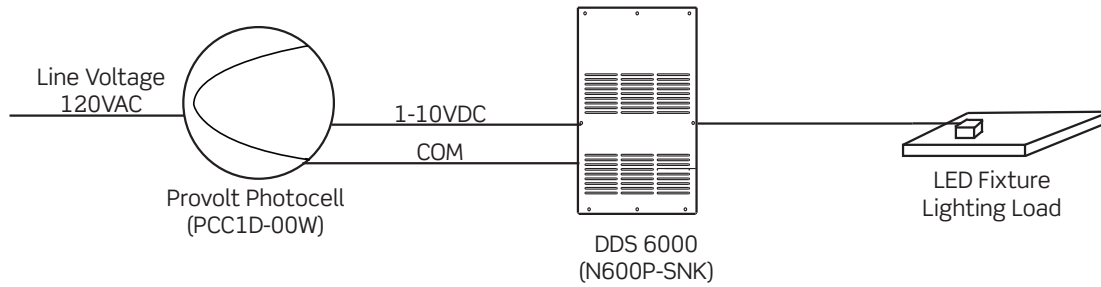

Note: (1) channel/zone shown. The DDS 6000+ supports up to (4) channels/zones per dimmer pack.

ORDERING INFORMATION

CAT. NO.	DESCRIPTION:
N600P-SNK	DDS 6000+ KO 4 Channel, 1200 Watt / Channel 4800 Watt Max Dimmer/Relay System, Knockout, 120V, UL/C-UL Listed, 1-10V sinking control only, control input breakout cable provided

Leviton Manufacturing Co., Inc. Global Headquarters

201 N. Service Rd. Melville, NY 11747-3138 • Tech Line: 1-800-824-3005 • Fax: 1-800-832-9538

Leviton Manufacturing Co., Inc. Lighting & Energy Solutions

10385 SW Avery St., Tualatin, OR 97062 • Tel: 1-800-736-6682 • FAX: 503-404-5594 • Tech Line (6:00AM-4:00PM P.S.T. Mon-Fri): 1-800-959-6004

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 • Telephone: 1-800-469-7890 • FAX: 1-800-563-1853

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 • Tel. (+52) 55-5082-1040 • FAX: (+52) 5386-1797 • www.leviton.com.mx

Visit our Website at: www.leviton.com/les

© 2023 Leviton Manufacturing Co., Inc. All rights reserved. Subject to change without notice.

G-9563B/K23-am