

# Passive Infrared Wideview Occupancy Sensor



## BASIC OPERATION

The OSWWV-I0W is a low-voltage infrared occupancy sensor that works with the OSPxx Series power pack to automatically control lighting. By sensing moving infrared heat sources, the sensor automatically turns the lights on during occupancy, maintains lights-on and, after a time delay, turns the lights off when the space is vacated.

The sensor uses a wide view (110 degrees) lens which detects large body motions over 50 ft. away. Smaller motions such as hand movement can be detected up to 34 feet. An internal light sensor allows the user to set the daylight override level.

The mounting base, provided with the sensor, allows quick and easy mounting in corners, on walls or on ceilings using the “twist-and-lock” feature.

## APPLICATIONS

- Cafeterias
- Classrooms
- Workspaces
- Copy rooms
- Open offices
- Parking garages
- Open areas
- Stairwells
- Open warehouses
- Conference rooms

## FEATURES

- Fast, simple installation: easy base mount, three wire connection (low voltage) and twist-lock sensor attachment

- Flexible base mounting: supplied twist-and-lock base mount permits fast alignment. Supplied cover hides mounting hardware and wires. Can be used with raceways for hard surface installations. Adjustable canopy for wall or ceiling mount.
- Wide coverage: Over 2,500 sq. ft. of coverage at 8 foot ceiling height with 110 degree aperture
- Custom off-white color matched for shaded ceiling/ corner spaces and most common ceiling tiles
- Power base (OPB15) available for line voltage applications
- Self-adjusting: Internal microprocessor continually analyzes, evaluates and adjusts the infrared sensitivity and time delay. Performance is kept at a maximum and user complaints are eliminated.
- Non-volatile memory: learned and adjusted settings saved in protected memory are not lost during power outages
- Timer setting feature: automatic - 30sec - 30min. Test mode - 6sec with auto exit programming.
- Walk-through: provides increased energy savings by decreasing the time delay to 2.5min when someone momentarily walks through the monitored space
- Uses OSPxx Series Power Pack: Uses Class 2, 24 volt wiring, three wire connection (low voltage). Multiple sensors can control single or multiple power packs.
- High motion sensitivity: the large lens area and multi-element lens design give excellent range and sensitivity
- Ambient light recognition: a Light Sensor prevents lights from turning on when the room is adequately lit by natural light
- Infrared sensing: high sensitivity 9.8 micron sensor dual element, semiconductor type
- Lens: 110° aperture, lens opening 2.2" x 1.47", 36 elements (72 zones) small motion range 31 ft, large motion 68 ft.
- Device: high-impact, injection molded plastic. Color coded wire leads are 6" long (16.24 cm)

OSWWV-I0W

## HOW THE OSWWV-I AUTOMATICALLY ADAPTS

Condition	Example	Self-Adaptive Reaction
Timer Left In Test Mode - The sensor remains in an 6 sec. test mode.	An installer accidentally leaves the sensor in the 6 sec. timer test mode and the lights may go off or on every 6 sec.	The sensor automatically resets the timer to 10 min after 15 min of test mode.
False-On - The sensor incorrectly turns the lights on.	The sensor detects movement in the corridor or hall way and the room lights turn on.	After an initial movement is sensed, if another movement is not sensed within the timer setting then the delayed off time setting is automatically reduced.
False-Off - The sensor incorrectly turns the lights off.	The sensor does not detect movement because an occupant sits virtually motionless at a desk and the lights turn off.	If motion is sensed within a short period after the lights go off, then the current delayed off-time setting is increased.

## Leviton Manufacturing Co., Inc. Global Headquarters


201 North Service Road, Melville, NY 11747-3138 tech line 800-824-3005 fax 800-832-9538

©2023 Leviton Manufacturing Co., Inc. All rights reserved. Subject to change without notice.


# PRODUCT DATA




## ADJUSTMENT RANGE



## MOUNTING BRACKET



## DIMENSIONS

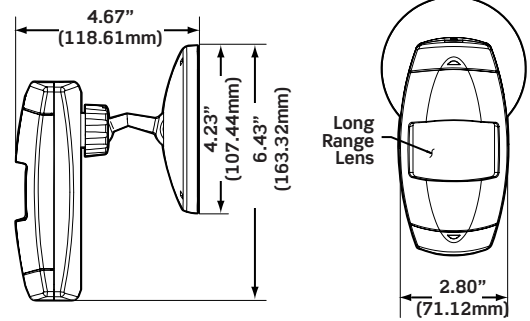


DIP SWITCH SETTINGS			
SWITCH	BANK A	SWITCH FUNCTIONS	SWITCH SETTINGS
A1	N/A	OFF	ON
A2	N/A	N/A	N/A
A3	Manual Mode	<b>Auto Adapting Enabled</b>	Auto Adapting Disabled
A4	Walk-Thru Disable	<b>Walk-Thru Enabled</b>	Walk-Thru Disabled
<b>BANK B</b>			
B1	Override to On	<b>Auto Mode</b>	Lights forced On
B2	Override to Off	<b>Auto Mode</b>	Lights forced Off
B3	Test Mode	<b>OFF'ON'OFF</b>	Enter/Exit Test Mode
B4	LED Disable	<b>LEDs Enabled</b>	LEDs Disabled

\*Bold items are factory defaults


## SPECIFICATIONS

ELECTRICAL	
Power Requirements	24 VDC, 15 mA (.36W) from OSPxx Power Pack or OPB15 Power Base
Power Consumption	15mA stand-by
Output	24 VDC active high logic control signal with short circuit protection (blue wire). Gray wire adds Light Sensor logic.
CONTROLS	
Infrared Sensitivity	0 to 100%; red knob (factory setting: 75%)
Light Sensor	Blue knob 20 to 3,000 Lux. Factory set at 100% (Grey wire required)
Time Delay	30sec-30min; black knob (Factory setting: 10min)
INDICATORS	
Red LED	Infrared motion technology
ENVIRONMENTAL	
Operating Temperature Range	32-104°F (0-40°C)
Relative Humidity	0-95% non-condensing, for indoor use only
OTHER	
Mounting Height	8-10 feet
Listings	CUL/US Certified
Energy Codes	Can be used to comply with IECC, ASHRAE 90.1, and 2019 Title 24, Part 6 occupancy sensing requirements
Warranty	Limited Five-Year Warranty
ORDERING INFORMATION	
CAT NO.	DESCRIPTION
OSWVW-10W	Passive Infrared Wideview Occupancy Sensor

## FIELD-OF-VIEW

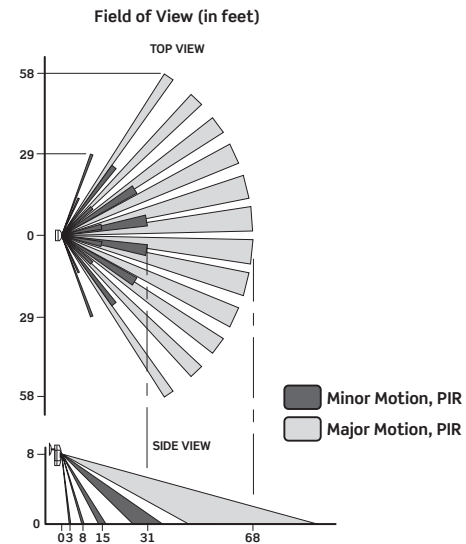

## PHYSICAL WIRING

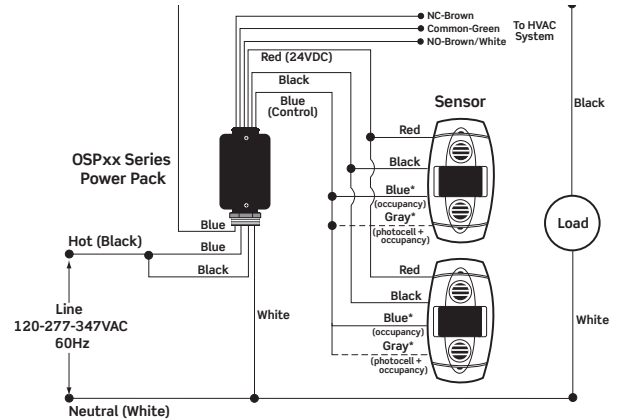

Made in USA with globally sourced components and NAFTA compliant models available.

### Leviton Manufacturing Co., Inc. Global Headquarters

201 North Service Road, Melville, NY 11747-3138 tel 800-323-8920 fax 800-832-9538 tech line (8:30AM-7:00PM ET Mon-Fri) 800-824-3005

### Leviton Manufacturing Co., Inc. Lighting & Controls

10385 SW Avery St., Tualatin, OR 97062 tel 800-736-6682 fax 503-404-5594 tech line (6:00AM-4:00PM PT Mon-Fri) 800-959-6004

Visit our Website at: [www.leviton.com/sensors](http://www.leviton.com/sensors)

©2023 Leviton Manufacturing Co., Inc. All rights reserved. Subject to change without notice.

G-7735D/K23-am  
REV NOV 2023

OSWVW-10W