


mBus RS-232 Interface

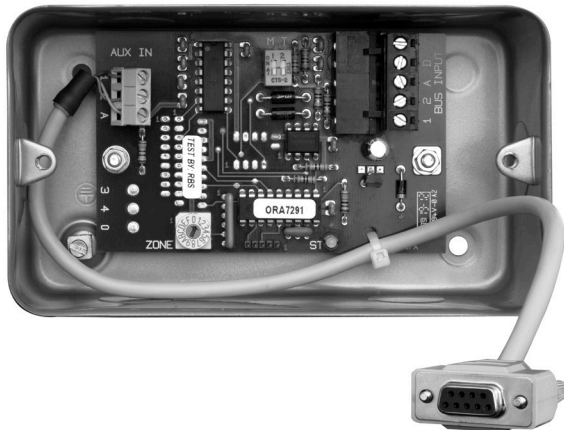

DESCRIPTION

Leviton Quantran™ mBus RS-232 Interface is a flexible, easy to control interface for Quantran mBus load control devices which connect to the RS-232 output of audio/visual control systems.

COMMANDS				
FUNCTION	ASCII	HEX	PARAMETERS	EXAMPLE (ASCII/HEX)
Select Scene	Z<m>S<n><cr>	5A<mm>53<nn>0D	<m> = Zone # Valid Value 0-16 <n> = Scene #, Valid Value 0-8	Z3S2<cr> 5A3353320D • Selects Scene 2 in Zone 3
Raise Channel	Z<m>R<n><cr>	5A<mm>52<nn>0D	<m> = Zone # Valid Value 0-16 <n> = Channel #, Valid Value 1-16	Z2R4<cr> 5A325234D • Raises Channel 4 in Zone 2
Raise ALL Channels	Z<m>R<cr>	5A<mm>520D	<m> = Zone # Valid Value 0-16	Z2R<cr> 5A32520D • Raises All Channels in Zone 2
Lower Channel	Z<m>L<n><cr>	5A<mm>4C<nn>0D	<m> = Zone # Valid Value 0-16 <n> = Channel #, Valid Value 1-16	Z1L2<cr> 5A31L320D • Lowers Channel 2 in Zone 1
Lower ALL Channels	Z<m>L<cr>	5A<mm>4C0D	<m> = Zone # Valid Value 0-16	Z1L<cr> 5A314C320D • Lowers all Channels in Zone 1
Stop Channel Raise or Lower	Z<m>X	5A<mm>58	<m> = Zone # Valid Value 0-16	Z4X 5A3458 • Stop Channel Raise/Lower in Zone 4
Store Current Scene	Z<m>V<cr>	5A<mm>560D	<m> = Zone # Valid Value 0-16	Z5V<cr> 5A35560D • Stores current scene in Zone 5

"Z" & "m" may be omitted. The command then operates in the default zone (set by the zone switch). In hex format, all parameters must be two digits long

Leviton Mfg. Co., Inc. Lighting & Energy Solutions

20497 SW Teton Avenue, Tualatin, OR 97062 1-800-736-6682 Tech Line: 1-800-959-6004 Fax: 503-404-5594 www.leviton.com/les
© 2014 Leviton Manufacturing Co., Inc. All rights reserved. Subject to change without notice.

SPECIFICATIONS	
Enclosure	Metal housing
Mounting	Inside dimming system cabinet, audio visual control system cabinet or surface mounted
Network	mBus
Ingress Protection	IP40
Power	8-18Vdc, 10mA, Power Supply not included
Dimensions	5.56" x 3.25" x 1.63" (141.22mm x 82.55mm x 41.40mm)
Weight	1lb

WIRING DIAGRAM



ORDERING INFORMATION

CAT. NO.	DESCRIPTION:
QTM00-232	mBus RS-232 Interface

mBus RS-232 Interface

Leviton Manufacturing Co., Inc. Lighting & Energy Solutions

20497 SW Teton Avenue, Tualatin, OR 97062 • Tel: 1-800-736-6682 • FAX: 503-404-5594 • Tech Line (6:00AM-4:00PM P.S.T. Mon-Fri): 1-800-959-6004

Leviton Manufacturing Co., Inc. Global Headquarters

201 N. Service Rd. Melville, NY 11747-3138 • Tech Line: 1-800-824-3005 • Fax: 1-800-832-9538

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 • Telephone: 1-800-469-7890 • FAX: 1-800-563-1853

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 • Tel. (+52) 55-5082-1040 • FAX: (+52) 5386-1797 • www.leviton.com.mx

Visit our Website at: www.leviton.com/les

© 2014 Leviton Manufacturing Co., Inc. All rights reserved. Subject to change without notice.