


LED Indicator Light Diagnosis for GFCIs

GFCIs - Multi-Function Indicator Light

For Power Status/GFCI Status/Miswiring Diagnosis

GFTR, GFNL, GFNT, GFWT, GFSW, GFRBF

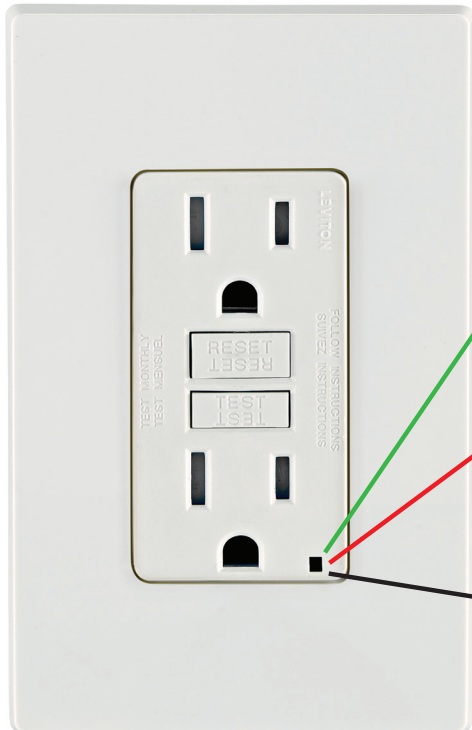

NORMAL

LED GREEN (White*)

- Set (RESET button **in**)
- Load Power **ON**
- GFCI in normal working mode

- Tripped (RESET button **out**)
- Load Power **OFF**
- Line and Load leads are reversed
- Review instructions for correct wiring

* White for Guidelight GFCI only (GFNL1 and GFNL2)

ALERT

LED SOLID OR FLASHING RED

- Set (RESET button **in**)
- Load Power **ON**
- Press **TEST** to trip GFCI - press **RESET** to see if issue is cleared.
- If RED indication continues, or GFCI will not **RESET**, replace GFCI.

- Set (RESET button **out**)
- Load Power **OFF**
- **OFF** - press **RESET** to see if issue is cleared.
- If **RED** indication continues, or GFCI will not **RESET**, replace GFCI.

NO POWER

LED OFF

- Tripped (RESET button **out**)
- Load Power **OFF**
- GFCI in Tripped state, press **RESET** button (GFCI will not reset if there is no power on the circuit).

Test your GFCI monthly

Leviton Manufacturing Co., Inc.

Tech Line: 1-800-824-3005

Mon-Fri 8am-10pm EST, Saturday 9am-7pm EST, Sunday 9am-5pm EST

For 24/7 product support visit www.leviton.com/support

Visit our Website at: www.leviton.com

© 2025 Leviton Manufacturing Co., Inc. All rights reserved.
All trademarks are the property of their respective owners.

